


## Quartz Crystal


SMD-version

model	KX - 20
frequency	7,37280 MHz
mode	fundamental
operating temperature	-20° ~ + 70°C
frequency tolerance at +25°C	± 50 ppm
temperature tolerance at -20° ~ + 70°C	± 50 ppm
load capacitance C <sub>L</sub>	16 pF
series resonance R <sub>1</sub> max.	80 Ohm
aging at 25°C ( first year ) max.	± 5 ppm
shunt capacitance C <sub>O</sub> max.	7,0 pF
drive level in mW	0,1
contents of reel	2000 pcs.
RoHS	according to RoHS 2011/65/EU
part no.	12.87505


**Dimensions (mm):**

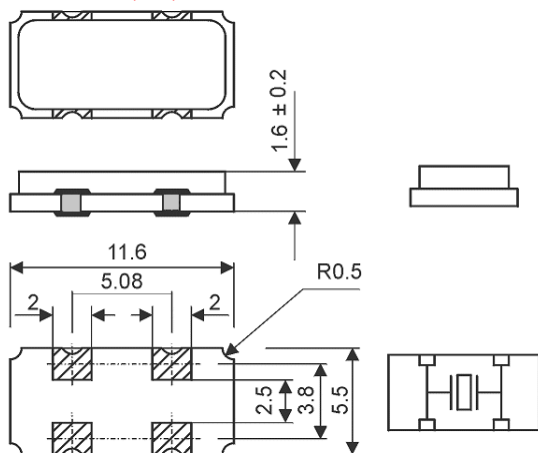

**Suggested soldering pad:**



**Reflow soldering condition:**

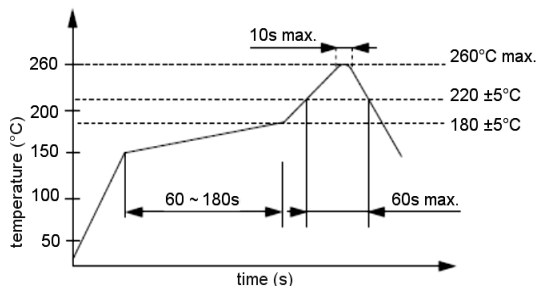

**Tape specification:**

