

DATA SHEET

122 SAL-RP

Aluminium electrolytic capacitors
Solid Al, Radial Pearl

Product specification
Supersedes data of January 1998
File under BC Components, BC01

1999 Apr 26

Aluminium electrolytic capacitors

Solid Al, Radial Pearl

122 SAL-RP

FEATURES

- Polarized aluminium electrolytic capacitors, solid electrolyte MnO₂
- Radial leads, max. height 12.5 mm, resin dipped, orange coloured
- Extremely long useful life: 20000 hours at 125 °C
- Extended usable temperature range up to 175 °C
- Excellent low temperature, impedance and ESR behaviour
- Charge and discharge proof, application with 0 Ω resistance allowed
- Reverse DC voltage up to 0.3 × U_R allowed
- AC voltage up to 0.8 × U_R allowed
- Advanced technology to achieve high reliability and high stability.


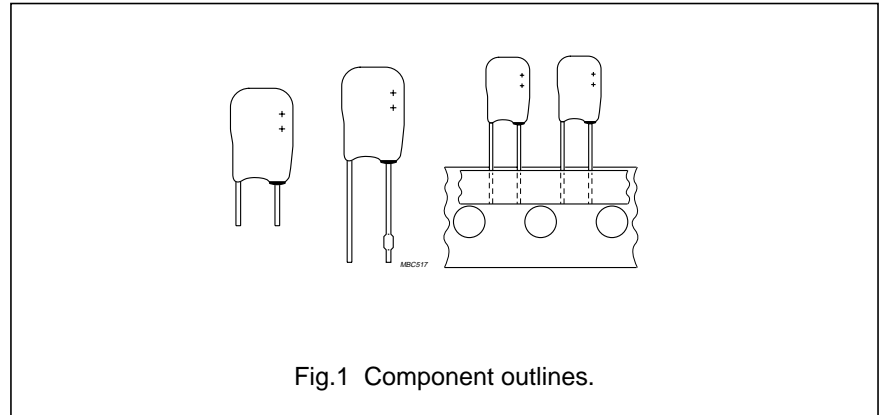


Fig.1 Component outlines.

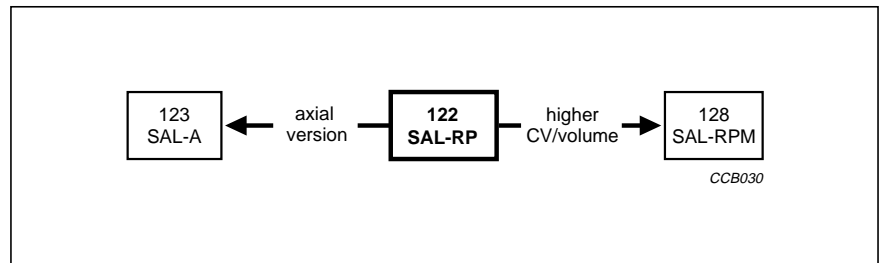

APPLICATIONS

- EDP, telecommunication, general industrial
- Automotive and audio-video
- For small power supplies, DC/DC converters.
- Smoothing, filtering and buffering

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Case sizes (H _{max} × W _{max} × T _{max} in mm)	12.5 × 8 × 3.5 to 12.5 × 8 × 6
Rated capacitance range (E6 series), C _R	0.33 to 68 μF
Tolerance on C _R	±20%
Rated voltage range, U _R	6.3 to 40 V
Category temperature range: U _R = 6.3 to 40 V U _C = 6.3 to 25 V	-55 to +85 °C -55 to +125 °C
Endurance test at 125 °C	10000 hours
Useful life at 125 °C	20000 hours
Useful life at 175 °C	2000 hours
Useful life at 40 °C, I _R applied	>300000 hours
Shelf life at 0 V, 125 °C	500 hours
Based on sectional specification	IEC 60384-4/CECC 30300
Detail specification	IEC 60384-4-2/CECC 30302
Climatic category IEC 60068	55/125/56

Aluminium electrolytic capacitors

Solid Al, Radial Pearl

122 SAL-RP

Selection chart for C_R , U_R , U_C and relevant maximum case sizes (H × W × T in mm)



Preferred types in **bold**.

C_R (μF)	U_R (V) at $T_{\text{amb}} = 85^\circ\text{C}$					
	6.3	10	16	25	35	40
	U_C (V) at $T_{\text{amb}} = 125^\circ\text{C}$					
	6.3	10	16	25	25	25
0.33	–	–	–	–	–	12.5 × 8 × 3.5
0.47	–	–	–	–	–	12.5 × 8 × 4.5
0.68	–	–	–	12.5 × 8 × 3.5	–	12.5 × 8 × 4.5
1.0	–	–	–	12.5 × 8 × 3.5	12.5 × 8 × 4.5	12.5 × 8 × 5
1.5	–	–	–	12.5 × 8 × 3.5	–	12.5 × 8 × 6
2.2	–	–	12.5 × 8 × 3.5	12.5 × 8 × 4.5	–	12.5 × 8 × 6
3.3	–	–	12.5 × 8 × 3.5	12.5 × 8 × 4.5	12.5 × 8 × 6	–
4.7	–	12.5 × 8 × 3.5	12.5 × 8 × 4.5	12.5 × 8 × 5	–	–
6.8	–	12.5 × 8 × 3.5	12.5 × 8 × 4.5	12.5 × 8 × 6	–	–
10	12.5 × 8 × 3.5	12.5 × 8 × 4.5	12.5 × 8 × 5	12.5 × 8 × 6	–	–
15	12.5 × 8 × 4.5	12.5 × 8 × 4.5	12.5 × 8 × 6	–	–	–
22	12.5 × 8 × 4.5	12.5 × 8 × 5	–	–	–	–
33	12.5 × 8 × 5	12.5 × 8 × 6	–	–	–	–
47	12.5 × 8 × 6	–	–	–	–	–
68	12.5 × 8 × 6	–	–	–	–	–

Aluminium electrolytic capacitors
Solid Al, Radial Pearl

122 SAL-RP

MECHANICAL DATA AVAILABLE FORMS AND PACKAGING QUANTITIES

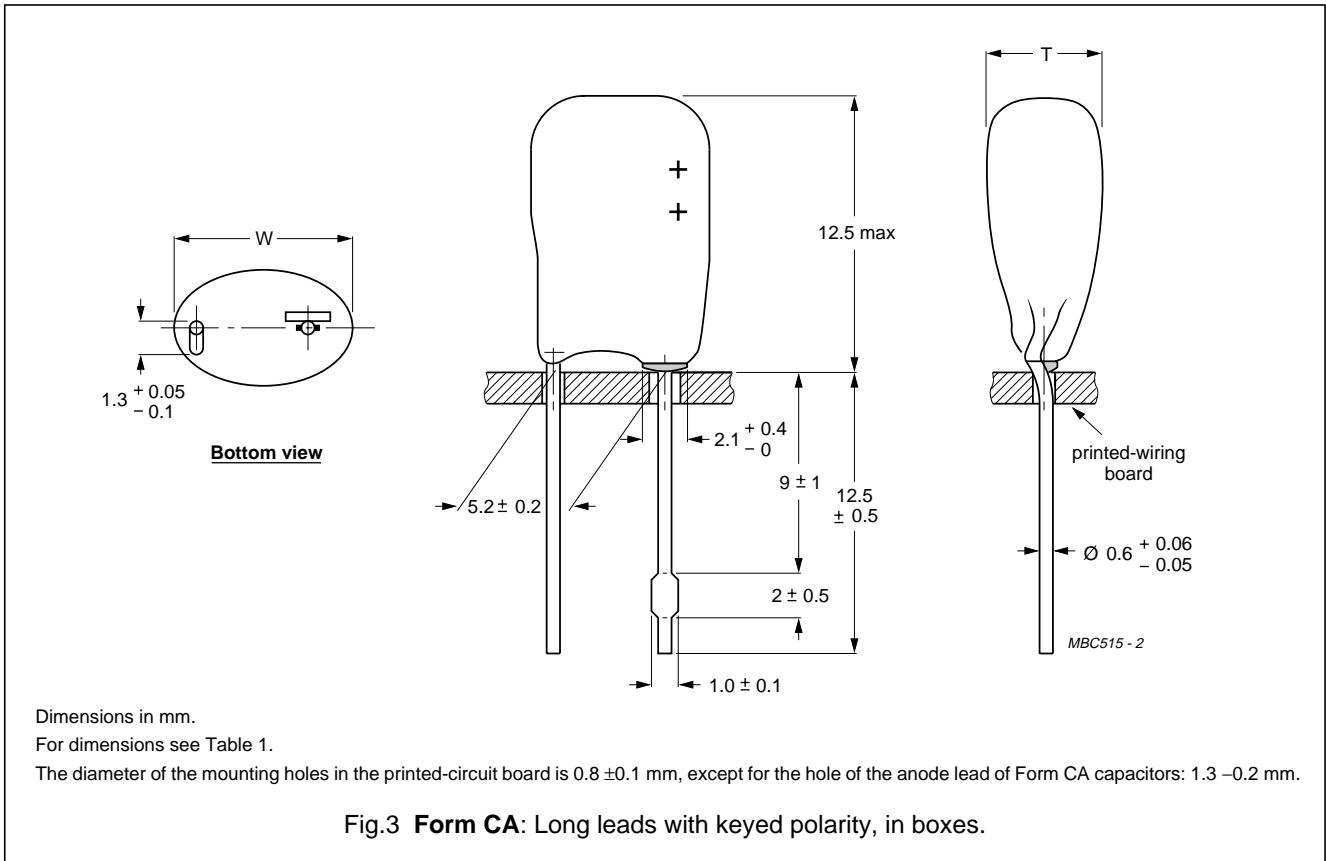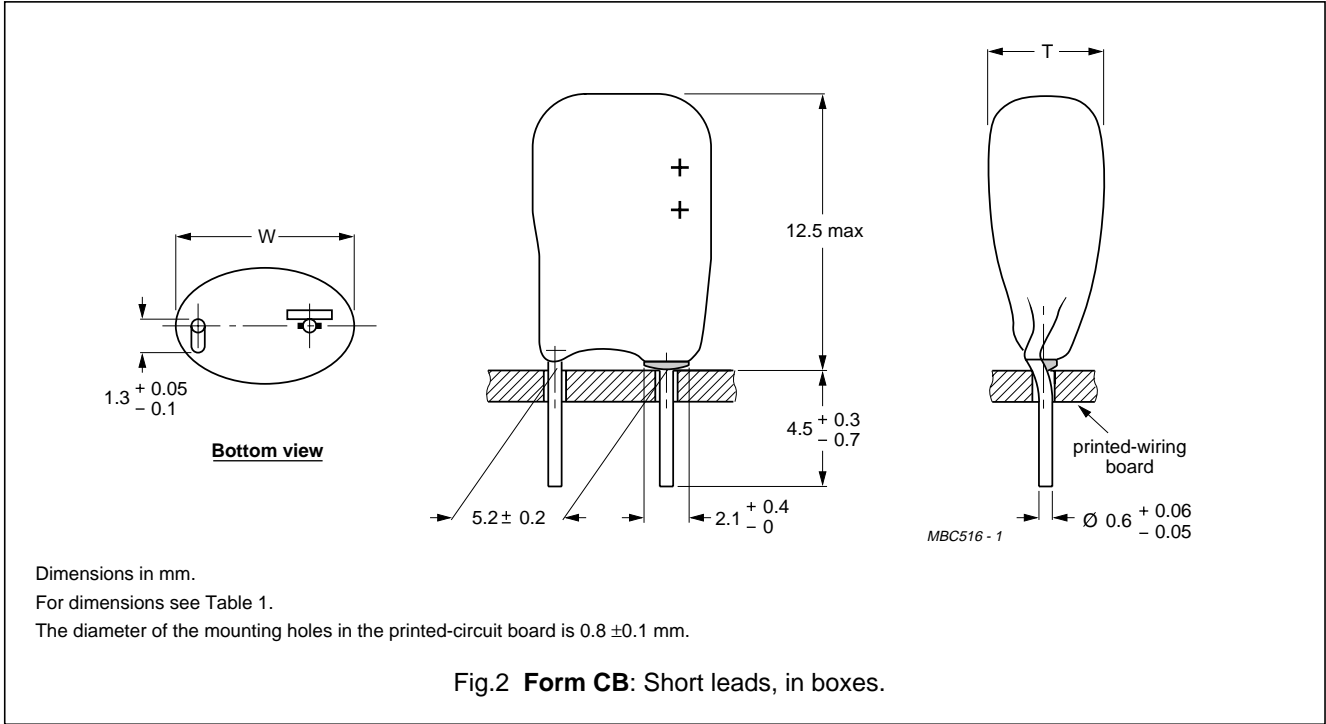

Aluminium electrolytic capacitors

Solid Al, Radial Pearl

122 SAL-RP

Table 1 Physical dimensions, mass and packaging quantities; see Figs 2 and 3

CASE		MASS (g)	PACKAGING QUANTITIES			
MAXIMUM SIZE H × W × T (mm)	CODE		FORM CA (note 1)	FORM CB (note 1)	FORM TR+	FORM TFA
12.5 × 8 × 3.5	1	≈0.35	1000	1000	2000	2000
12.5 × 8 × 4.5	2	≈0.38	1000	1000	2000	2000
12.5 × 8 × 5	3	≈0.45	1000	1000	1000	1000
12.5 × 8 × 6	4	≈0.58	800	1000	1000	1000

Note

1. In plastic bags of 200 units each.

Taped products

Tape dimensions are specified in data handbook PA01, section "Packaging".

MARKING


The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF)
- Tolerance code on rated capacitance (M = ±20%)
- Rated voltage (in V) and category voltage if applicable
- Date code in accordance with "IEC 60062"
- Name of manufacturer
- '+' signs to identify the anode terminal.

MOUNTING

When bending, cutting or straightening the leads, ensure that the capacitor body is relieved of stress.

Bending after soldering must be avoided.

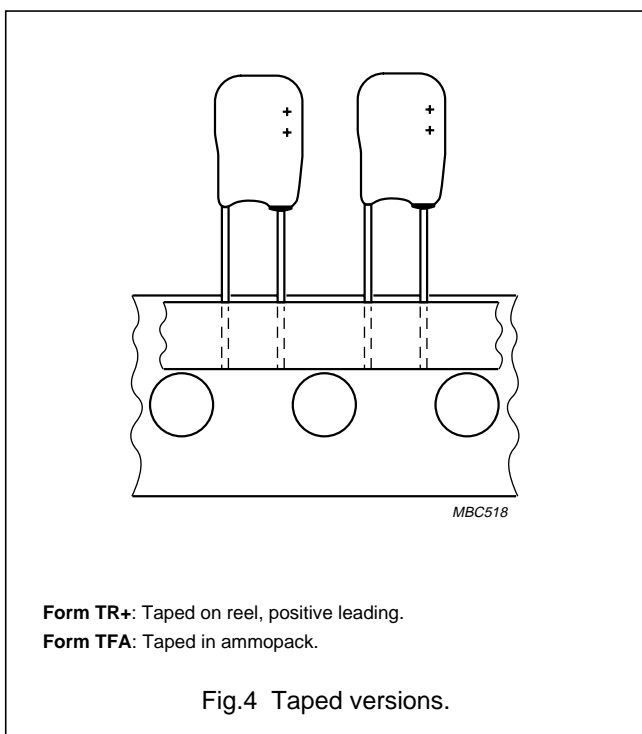

Aluminium electrolytic capacitors
Solid Al, Radial Pearl

1222 SAL-PP

Ordering example

Electrolytic capacitors 122 series

10 μ F/16 V; \pm 20%Maximum case size: 12.5 \times 8 \times 5 mm; Form TFA

Catalogue number: 2222 122 35109.

ELECTRICAL DATA AND ORDERING INFORMATION

Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20$ to 25 °C,
 $P = 86$ to 106 kPa, $RH = 45$ to 75% .

C_R	rated capacitance at 100 Hz, tolerance \pm 20%
I_R	max. RMS ripple current, no necessary DC voltage applied
I_{L5}	max. leakage current after 5 minutes at U_R
Tan δ	max. dissipation factor at 100 Hz
ESR	max. equivalent series resistance at 100 Hz
Z	max. impedance at 100 kHz

Table 2 Electrical data and ordering information; preferred types in **bold**

U_C (V)	U_R (V)	C_R 100 Hz (μ F)	MAXIMUM CASE SIZE H \times W \times T (mm)	CASE CODE	I_R 100 Hz 125 °C (mA)	I_R 10 kHz 85 °C (mA)	I_R 100 kHz 40 °C (mA)	I_{L5} 5 min (μ A)	Tan δ 100 Hz	ESR 100 Hz (Ω)	Z 100 kHz (Ω)	CATALOGUE NUMBER 2222 122			
												FORM CB	FORM CA	FORM TR+ REEL	FORM TFA AMMO
6.3	6.3	10	12.5 \times 8 \times 3.5	1	9	156	211	3	0.15	30	5	53109	73109	23109	33109
		15	12.5 \times 8 \times 4.5	2	13	195	264	5	0.15	20	3	53159	73159	23159	33159
		22	12.5 \times 8 \times 4.5	2	20	234	317	7	0.15	14	1.3	53229	73229	23229	33229
		33	12.5 \times 8 \times 5	3	30	293	396	11	0.15	9	0.9	53339	73339	23339	33339
		47	12.5 \times 8 \times 6	4	42	371	502	15	0.15	6.4	0.7	53479	73479	23479	33479
		68	12.5 \times 8 \times 6	4	61	449	607	22	0.15	4.4	0.5	53689	73689	23689	33689
10	10	4.7	12.5 \times 8 \times 3.5	1	7	117	158	3	0.15	64	7	54478	74478	24478	34478
		6.8	12.5 \times 8 \times 3.5	1	10	137	185	4	0.15	44	5	54688	74688	24688	34688
		10	12.5 \times 8 \times 4.5	2	14	156	211	5	0.15	30	1.5	54109	74109	24109	34109
		15	12.5 \times 8 \times 4.5	2	21	195	264	8	0.15	20	1	54159	74159	24159	34159
		22	12.5 \times 8 \times 5	3	31	234	317	11	0.15	14	0.7	54229	74229	24229	34229
		33	12.5 \times 8 \times 6	4	47	312	422	17	0.15	9	0.5	54339	74339	24339	34339
16	16	2.2	12.5 \times 8 \times 3.5	1	5	98	132	2	0.10	91	10	55228	75228	25228	35228
		3.3	12.5 \times 8 \times 3.5	1	8	117	158	3	0.10	61	7	55338	75338	25338	35338
		4.7	12.5 \times 8 \times 4.5	2	11	137	185	4	0.10	43	2	55478	75478	25478	35478
		6.8	12.5 \times 8 \times 4.5	2	16	156	211	6	0.10	29.5	1.5	55688	75688	25688	35688
		10	12.5 \times 8 \times 5	3	23	195	264	8	0.10	20	1	55109	75109	25109	35109
		15	12.5 \times 8 \times 6	4	34	254	343	12	0.10	13.5	0.7	55159	75159	25159	35159

Aluminium electrolytic capacitors
Solid Al, Radial Pearl

1222 SAL-PP

U _C (V)	U _R (V)	C _R 100 Hz (μF)	MAXIMUM CASE SIZE H × W × T (mm)	CASE CODE	I _R 100 Hz 125 °C (mA)	I _R 10 kHz 85 °C (mA)	I _R 100 kHz 40 °C (mA)	I _{L5} 5 min (μA)	Tan δ 100 Hz	ESR 100 Hz (Ω)	Z 100 kHz (Ω)	CATALOGUE NUMBER 2222 122			
												FORM CB	FORM CA	FORM TR+ REEL	FORM TFA AMMO
25	25	0.68	12.5 × 8 × 3.5	1	2	55	74	2	0.10	295	30	56687	76687	26687	36687
		1.0	12.5 × 8 × 3.5	1	4	62	85	2	0.10	200	20	56108	76108	26108	36108
		1.5	12.5 × 8 × 3.5	1	5	78	106	2	0.10	135	15	56158	76158	26158	36158
		2.2	12.5 × 8 × 4.5	2	8	98	132	3	0.10	91	10	56228	76228	26228	36228
		3.3	12.5 × 8 × 4.5	2	12	117	158	4	0.10	61	7	56338	76338	26338	36338
		4.7	12.5 × 8 × 5	3	17	137	185	6	0.10	43	5	56478	76478	26478	36478
		6.8	12.5 × 8 × 6	4	24	176	238	9	0.10	29.5	3	56688	76688	26688	36688
10	12.5 × 8 × 6	4	35	200	238	13	0.15	20	2	56109	76109	26109	36109		
25	35	1.0	12.5 × 8 × 4.5	2	3	62	85	2	0.10	200	15	50108	70108	20108	30108
		3.3	12.5 × 8 × 6	4	12	117	132	6	0.10	61	5	50338	70338	20338	30338
25	40	0.33	12.5 × 8 × 3.5	1	1	39	53	2	0.10	610	30	57337	77337	27337	37337
		0.47	12.5 × 8 × 4.5	2	2	47	63	2	0.10	430	20	57477	77477	27477	37477
		0.68	12.5 × 8 × 4.5	2	2	55	74	2	0.10	295	15	57687	77687	27687	37687
		1.0	12.5 × 8 × 5	3	4	62	85	2	0.10	200	10	57108	77108	27108	37108
		1.5	12.5 × 8 × 6	4	5	78	106	3	0.10	135	7	57158	77158	27158	37158
		2.2	12.5 × 8 × 6	4	8	98	132	5	0.10	91	5	57228	77228	27228	37228

Aluminium electrolytic capacitors

Solid Al, Radial Pearl

122 SAL-RP


Additional electrical data

PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	for short periods	$U_S \leq 1.15 \times U_R$
Reverse voltage		$U_{rev} < 0.3 \times U_R$
Maximum peak AC voltage, reverse voltage applied		$\leq 2 \text{ V}$
Maximum peak AC voltage, without reverse voltage applied	$T_{amb} \leq 85 \text{ }^\circ\text{C}$: at $f \leq 0.1 \text{ Hz}$ at $0.1 \text{ Hz} < f \leq 1 \text{ Hz}$ at $1 \text{ Hz} < f \leq 10 \text{ Hz}$ at $10 \text{ Hz} < f \leq 50 \text{ Hz}$ at $f > 50 \text{ Hz}$ $85 \text{ }^\circ\text{C} < T_{amb} \leq 125 \text{ }^\circ\text{C}$: at $f \leq 0.1 \text{ Hz}$ at $0.1 \text{ Hz} < f \leq 1 \text{ Hz}$ at $1 \text{ Hz} < f \leq 10 \text{ Hz}$ at $10 \text{ Hz} < f \leq 50 \text{ Hz}$ at $f > 50 \text{ Hz}$	$0.30 \times U_R$ $0.45 \times U_R$ $0.60 \times U_R$ $0.65 \times U_R$ $0.80 \times U_R$ $0.15 \times U_R$ $0.22 \times U_R$ $0.30 \times U_R$ $0.32 \times U_R$ $0.40 \times U_R$
Inductance		
Equivalent series inductance (ESL)	case size $12.5 \times 8 \times 3.5$ to $12.5 \times 8 \times 4.5 \text{ mm}$	typ. 9 to 14 nH
	case size $12.5 \times 8 \times 5$ and $12.5 \times 8 \times 6 \text{ mm}$	typ. 11 to 16 nH
	all case sizes	max. 20 nH
Dissipation		
Maximum power dissipation	case sizes $12.5 \times 8 \times 3.5$ to $12.5 \times 8 \times 5 \text{ mm}$	$P_{125} = 88 \text{ mW}$
	case size $12.5 \times 8 \times 6 \text{ mm}$	$P_{125} = 104 \text{ mW}$
Current		
Maximum leakage current	after 5 minutes at U_R and $T_{amb} = 25 \text{ }^\circ\text{C}$	$I_{L5} \leq 0.05C_R \times U_R$ or $2 \text{ } \mu\text{A}$ whichever is greater; see Table 2
Typical leakage current	after 15 s at U_R and $T_{amb} = 25 \text{ }^\circ\text{C}$: $U_R = 6.3$ to 16 V $U_R = 25$ to 40 V	$\approx 0.2 \times$ value stated in Table 2 $\approx 0.1 \times$ value stated in Table 2

Aluminium electrolytic capacitors
Solid Al, Radial Pearl

122 SAL-RP

Voltage

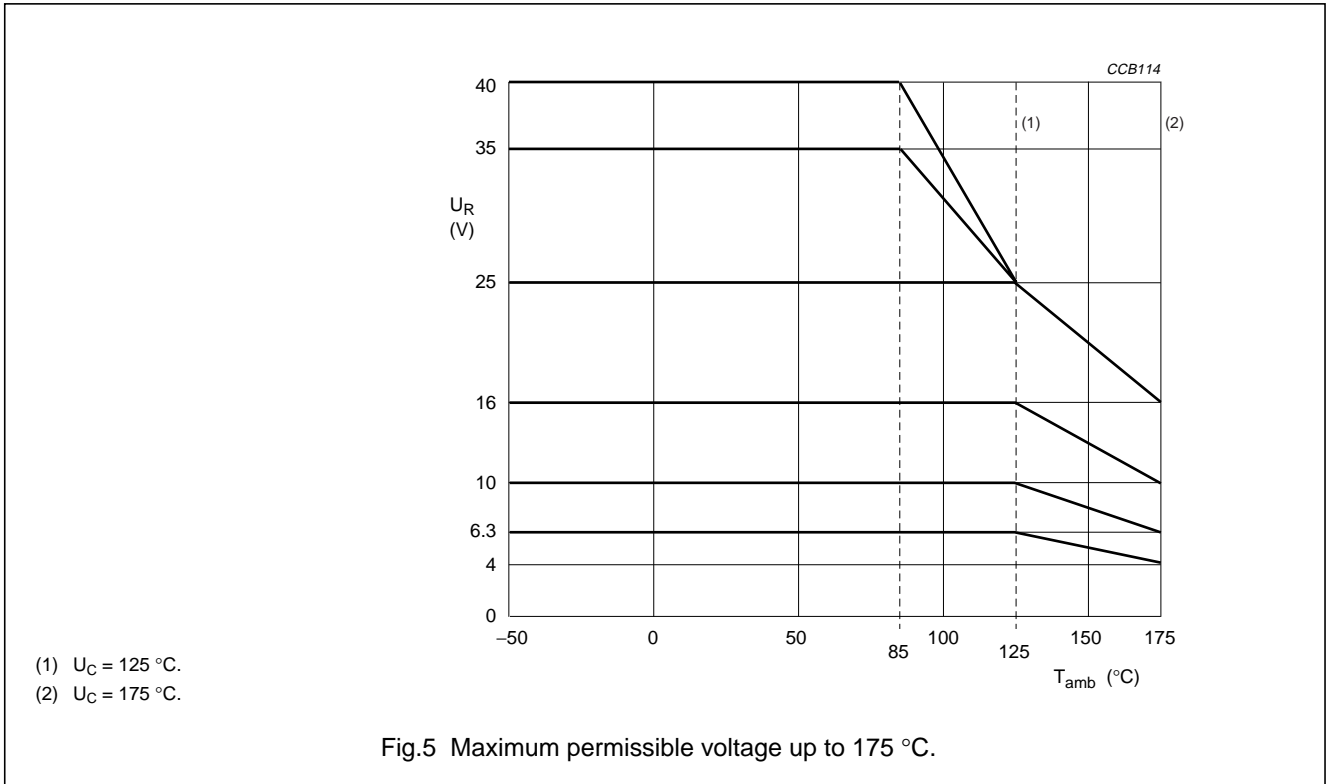

Ripple current (I_R)


Applying the maximum RMS ripple current given in Table 2 will cause a device temperature of 138 °C. The 100 kHz values in Table 2 for other temperatures are to be calculated with the following I_R multipliers:

PARAMETER	T_{amb}					
	25 °C	40 °C	65 °C	85 °C	105 °C	125 °C
I_R multiplier	1.1	1.0	0.88	0.75	0.59	0.37


Aluminium electrolytic capacitors
Solid Al, Radial Pearl

122 SAL-RP

Capacitance (C)

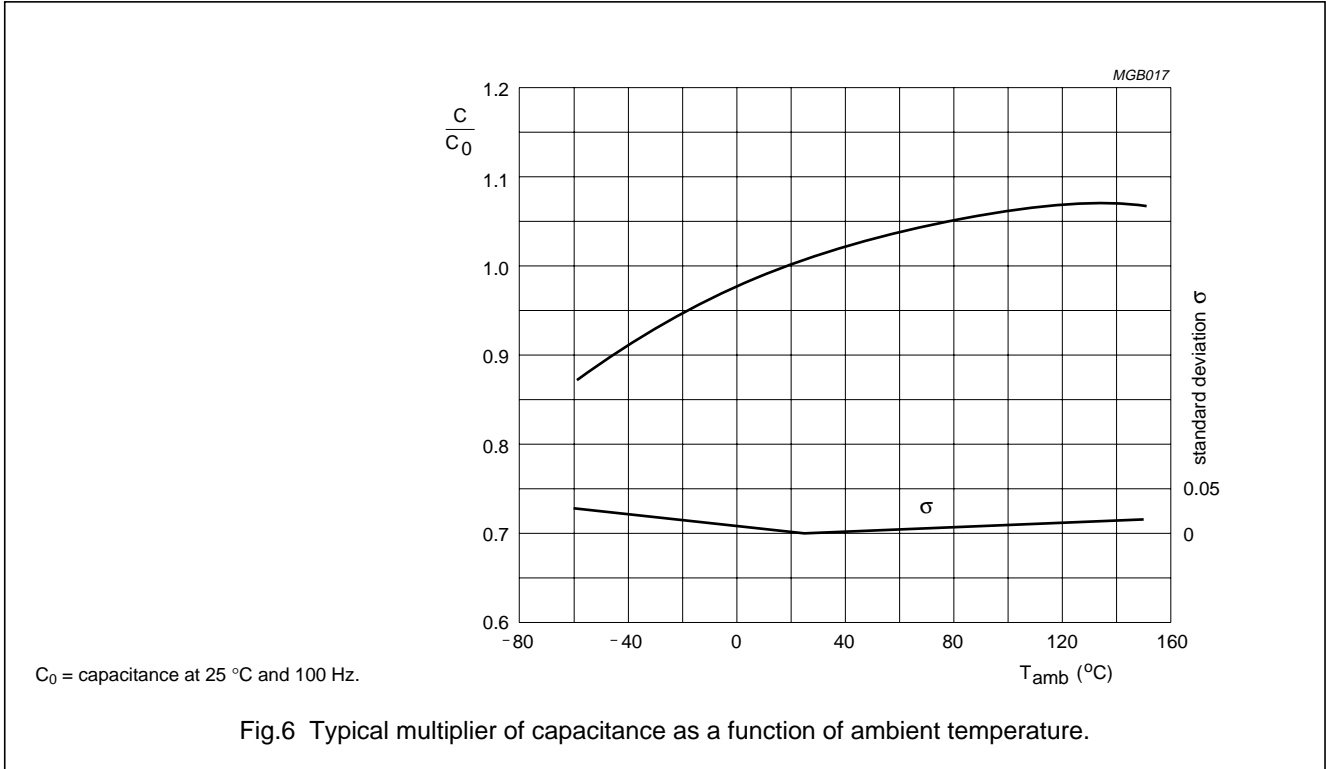


Typical capacitance change after endurance test at $T_{amb} = 125^\circ\text{C}$

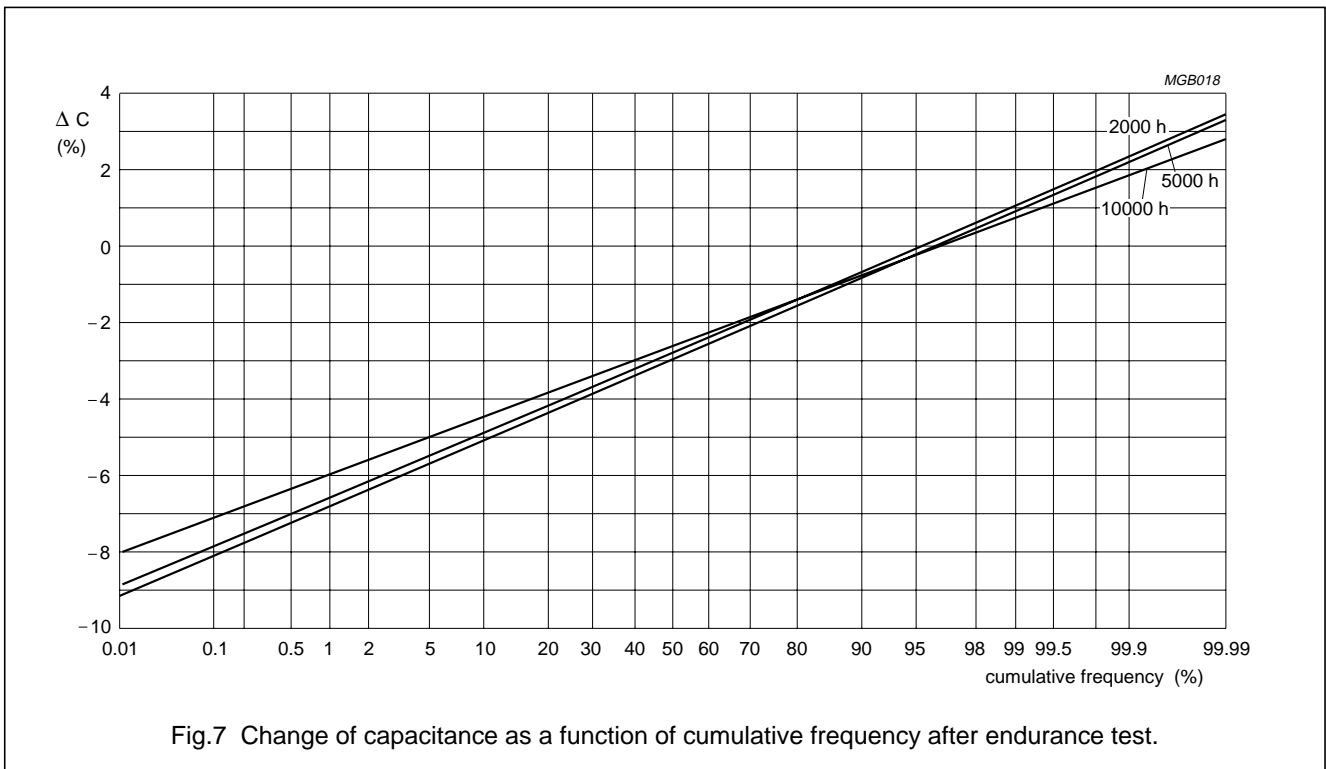


Aluminium electrolytic capacitors Solid Al, Radial Pearl

122 SAL-RP

Leakage current

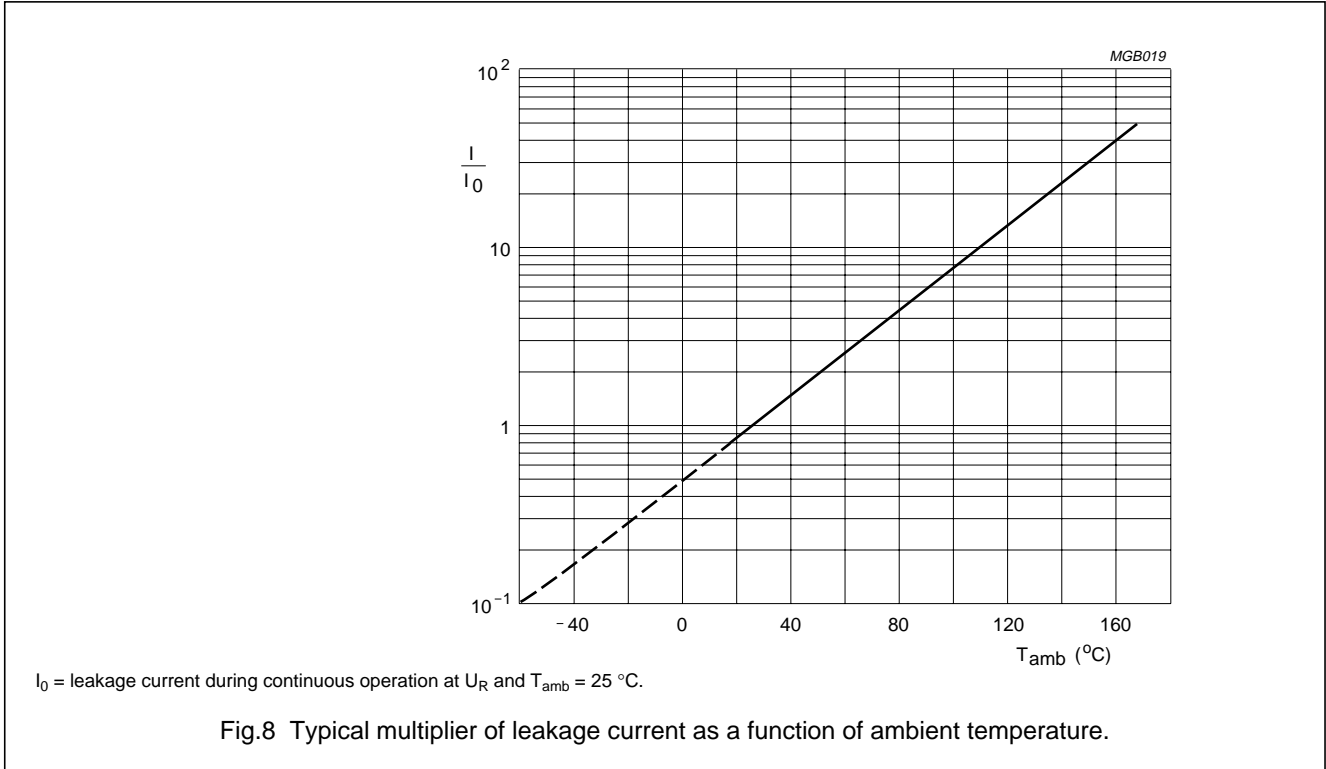


Typical leakage current change after endurance test at $T_{amb} = 125^{\circ}C$

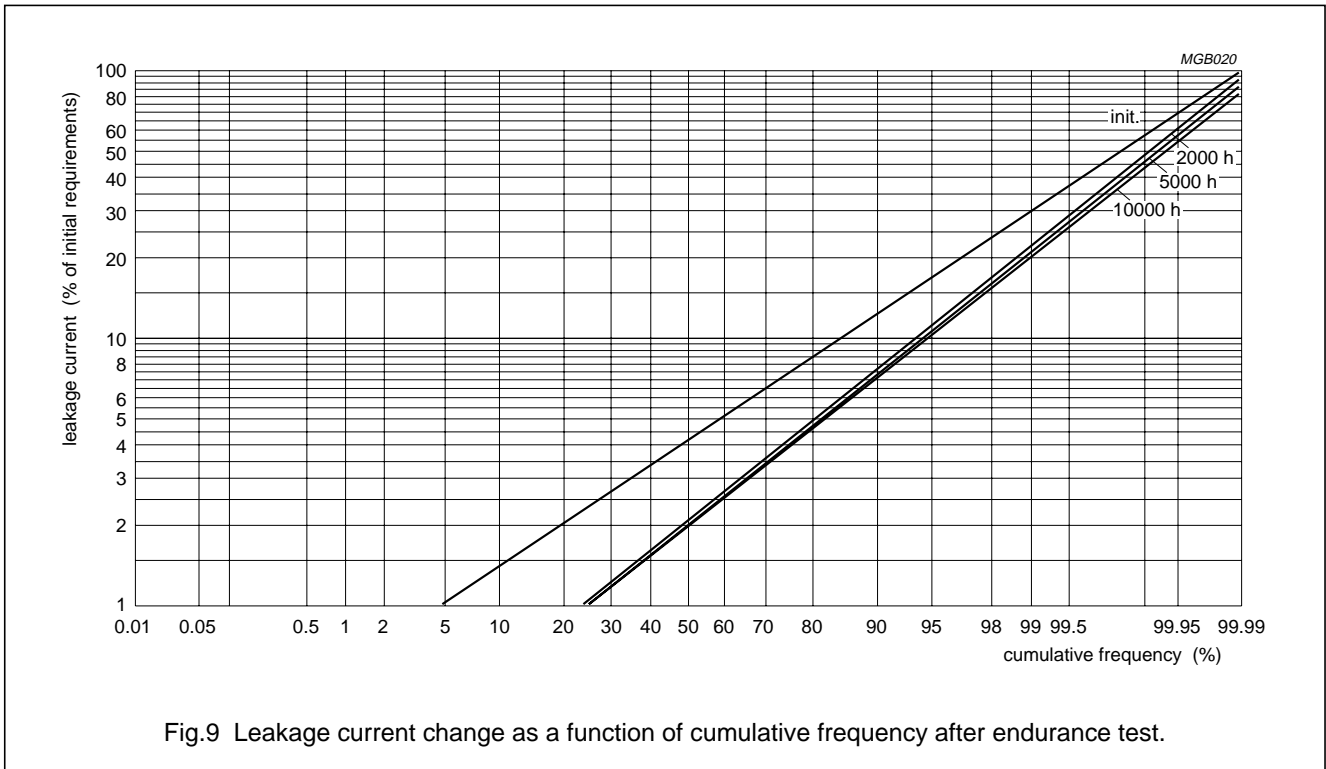


Aluminium electrolytic capacitors
Solid Al, Radial Pearl

122 SAL-RP

Dissipation factor ($\tan \delta$)

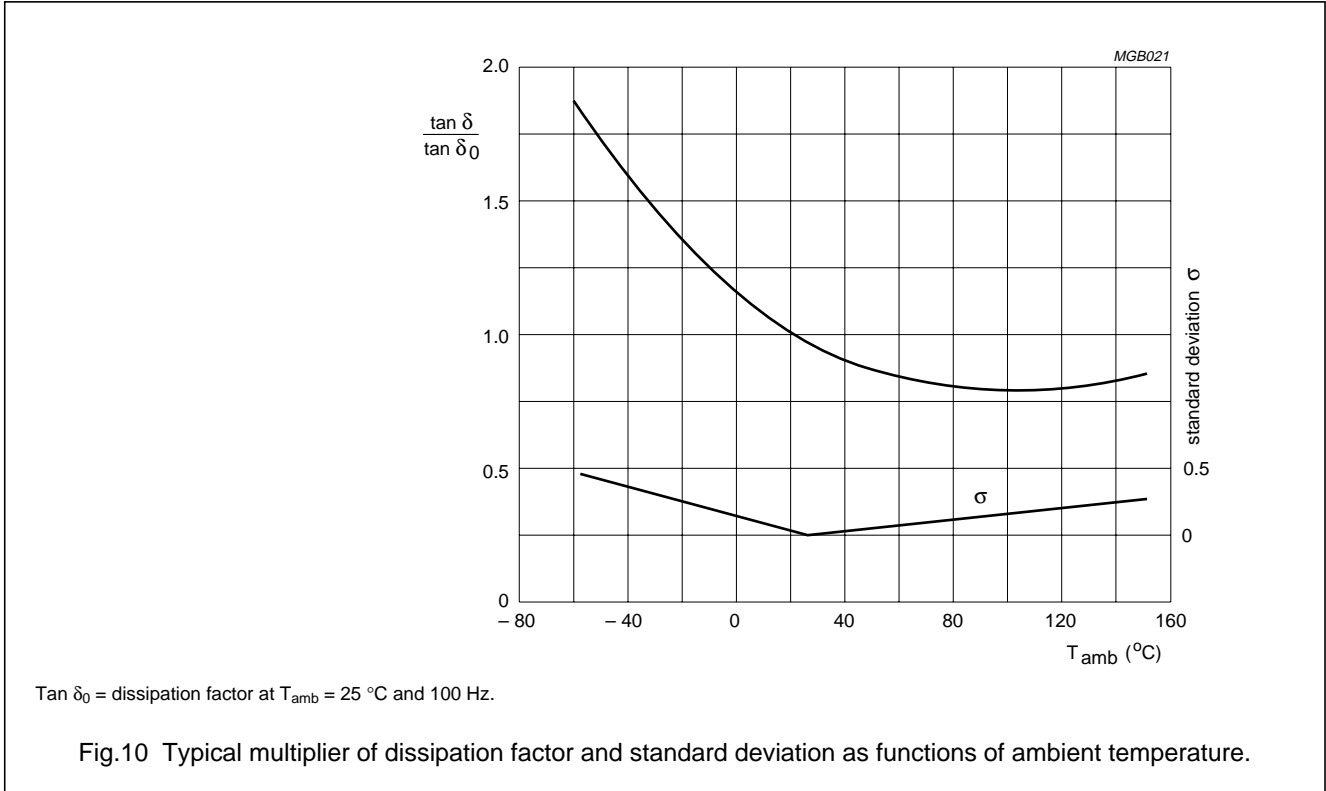

Typical $\tan \delta$ change after endurance test at $T_{amb} = 125^{\circ}\text{C}$


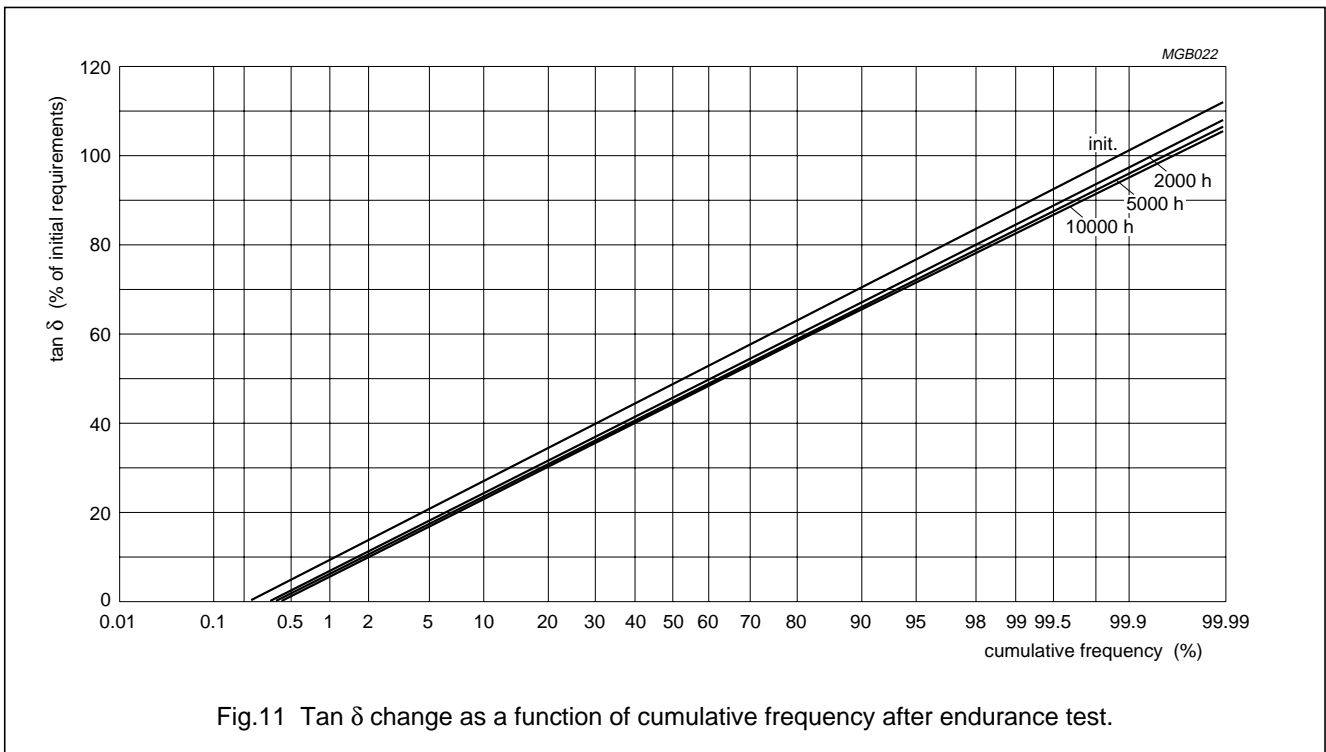


Aluminium electrolytic capacitors

Solid Al, Radial Pearl



122 SAL-RP

Equivalent series resistance (ESR)

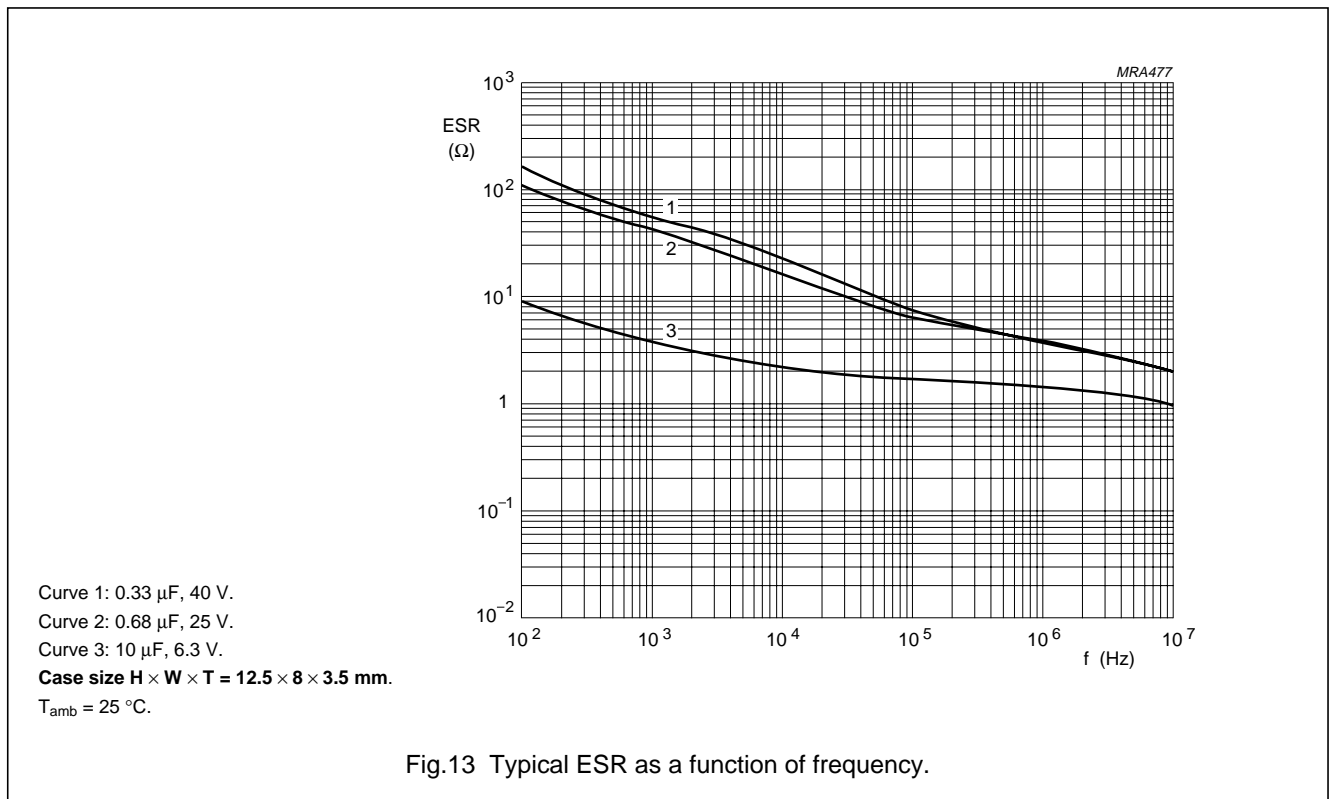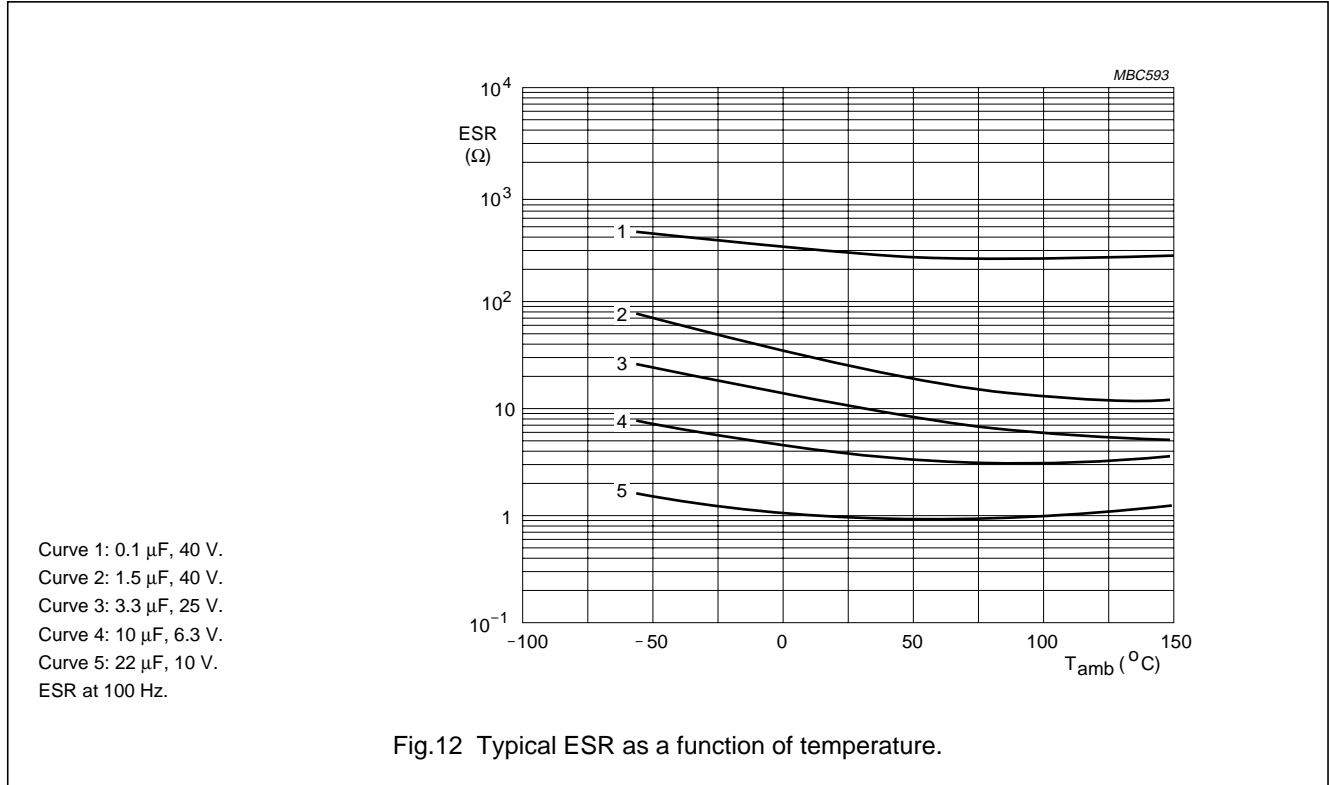


Aluminium electrolytic capacitors
Solid Al, Radial Pearl

122 SAL-RP

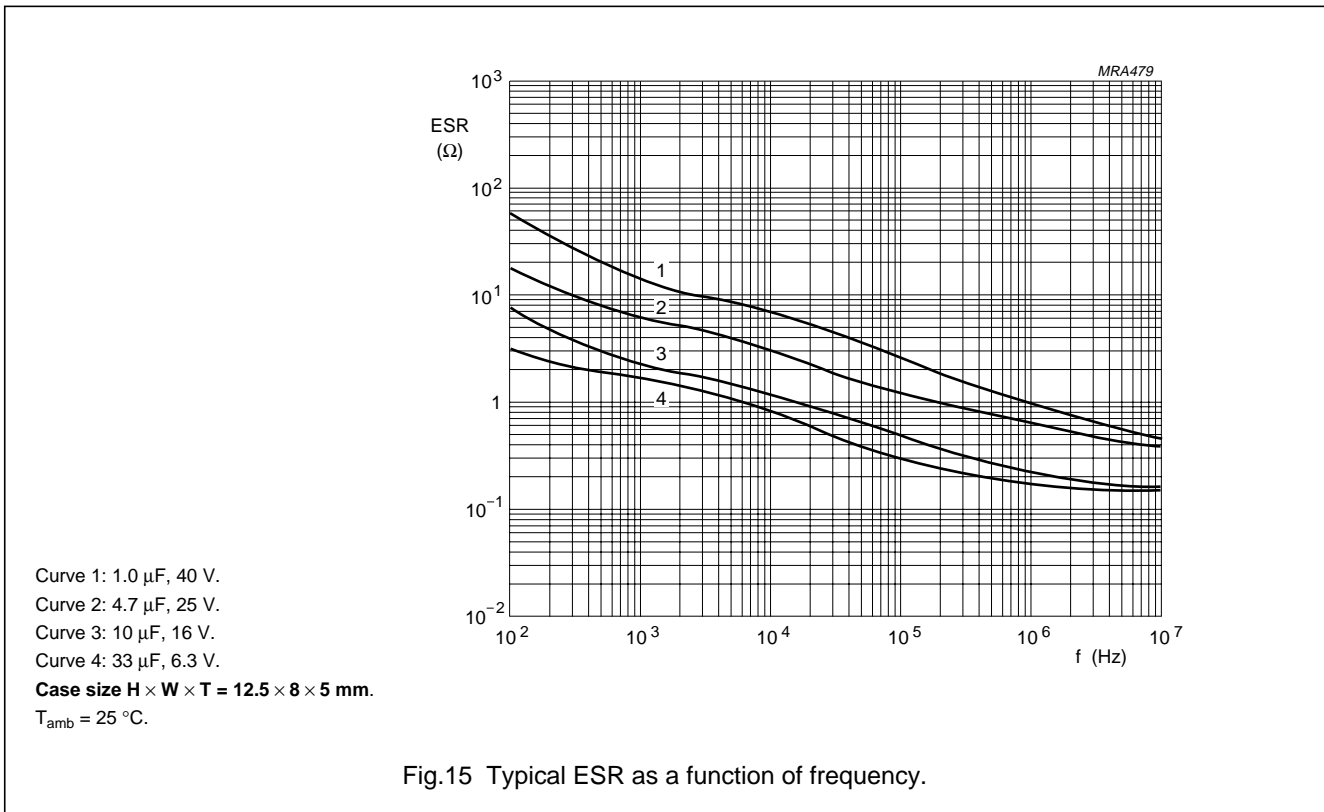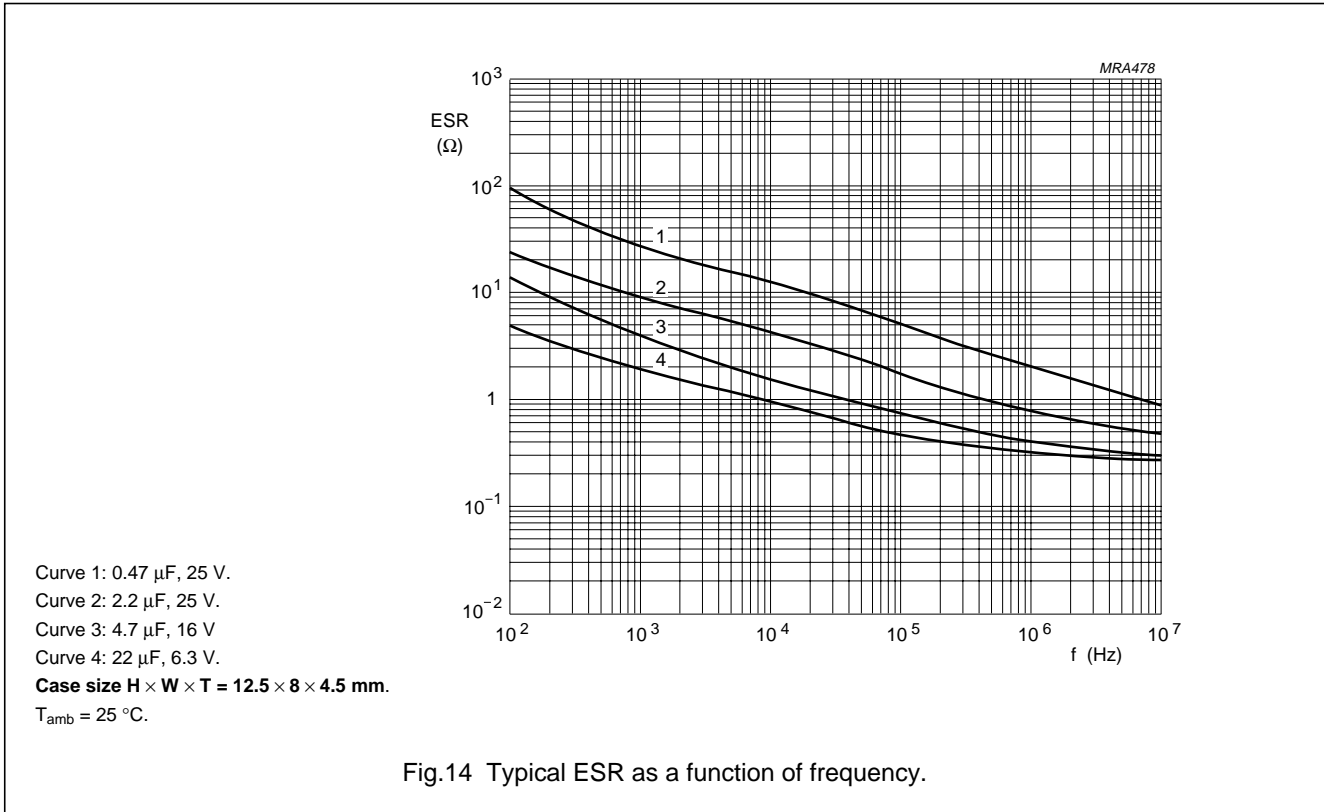


Aluminium electrolytic capacitors
Solid Al, Radial Pearl

122 SAL-RP

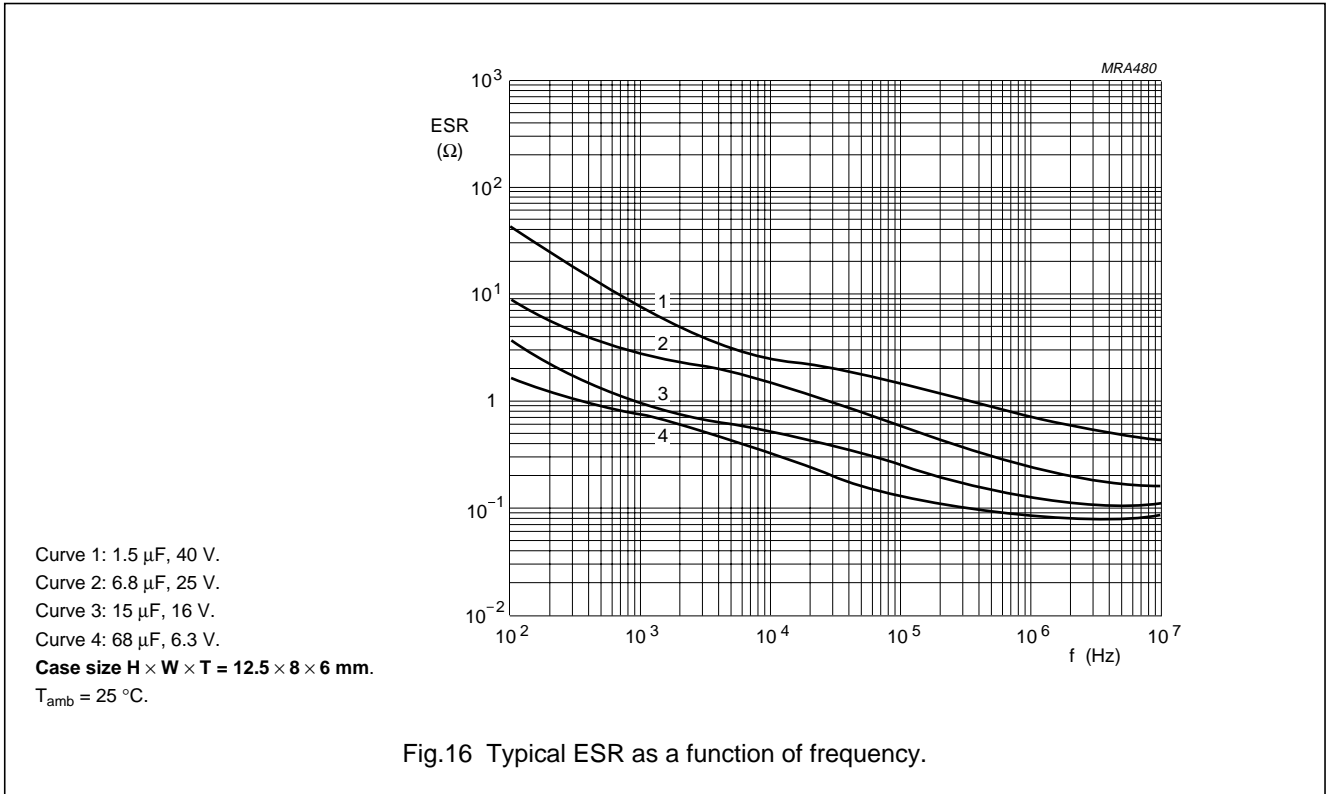



Impedance (Z)

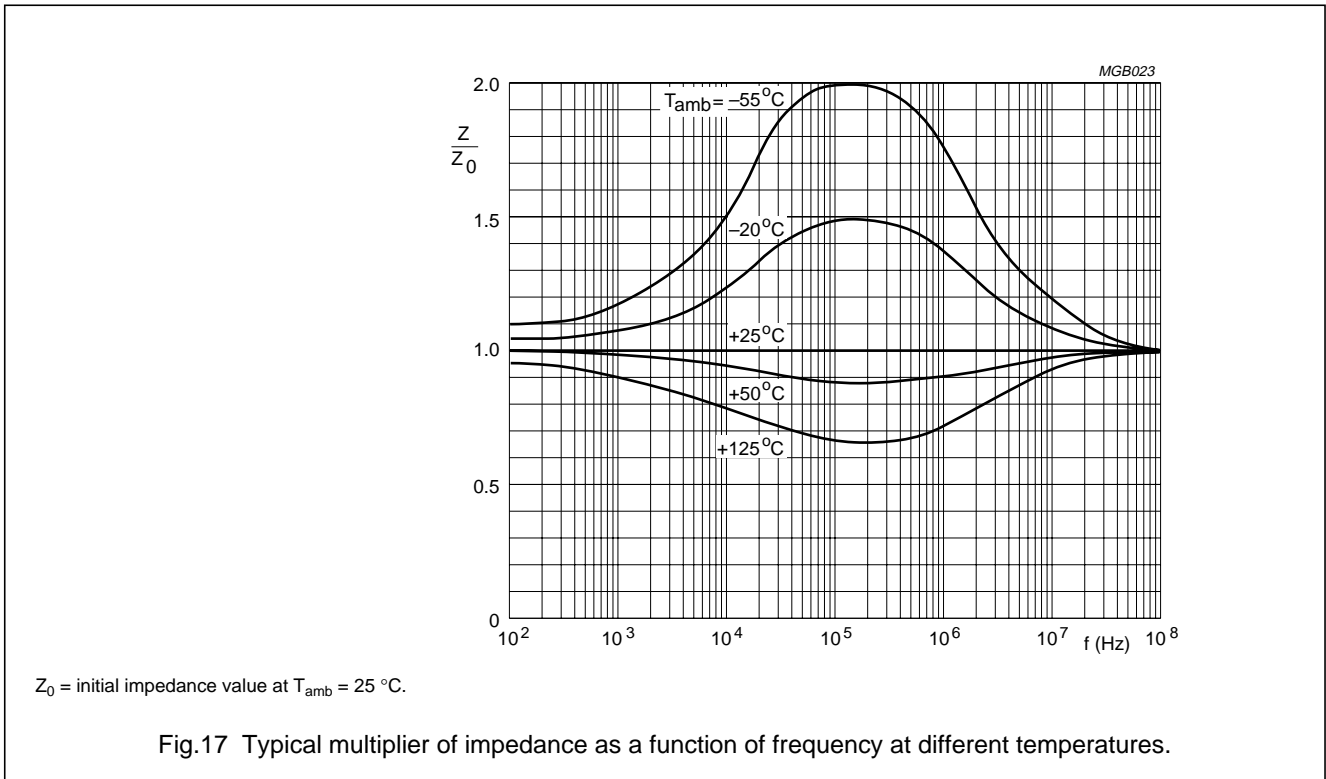

Aluminium electrolytic capacitors



Solid Al, Radial Pearl

122 SAL-RP

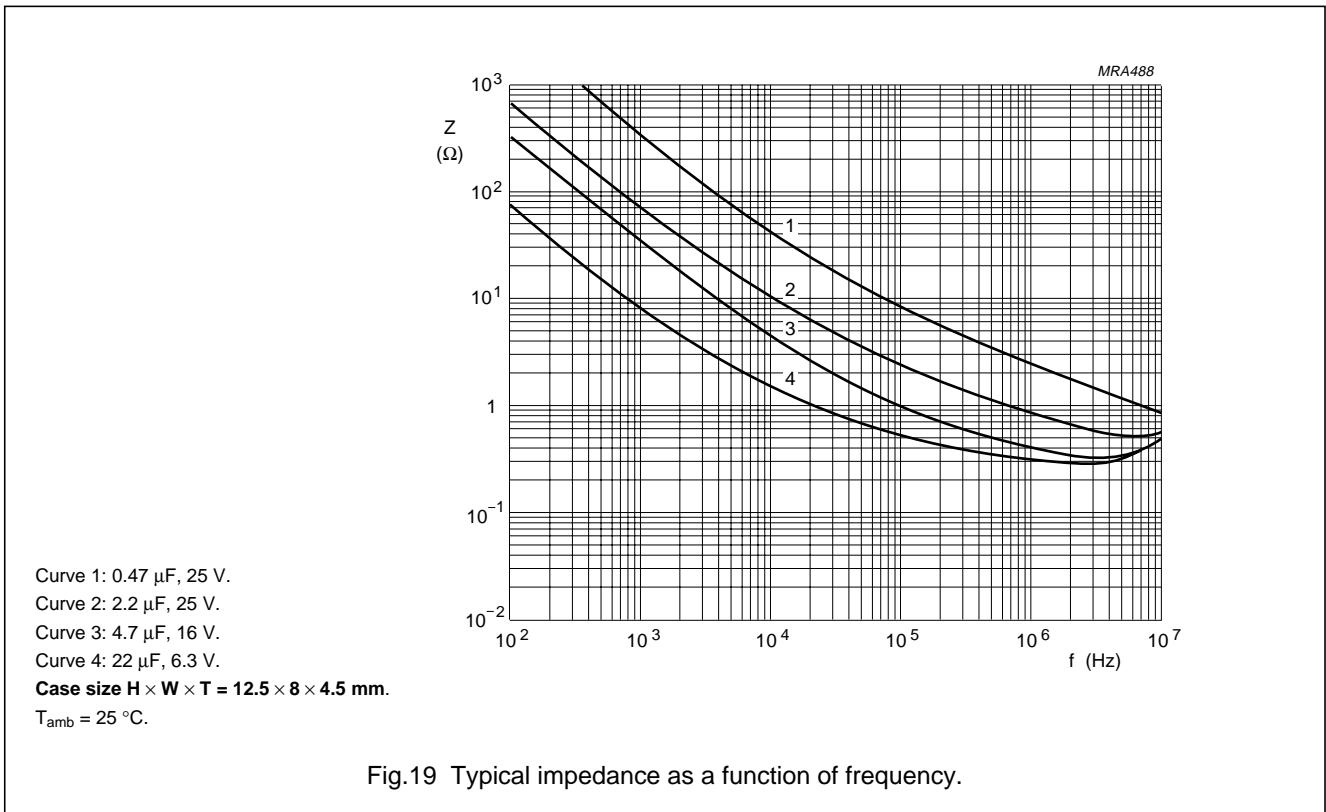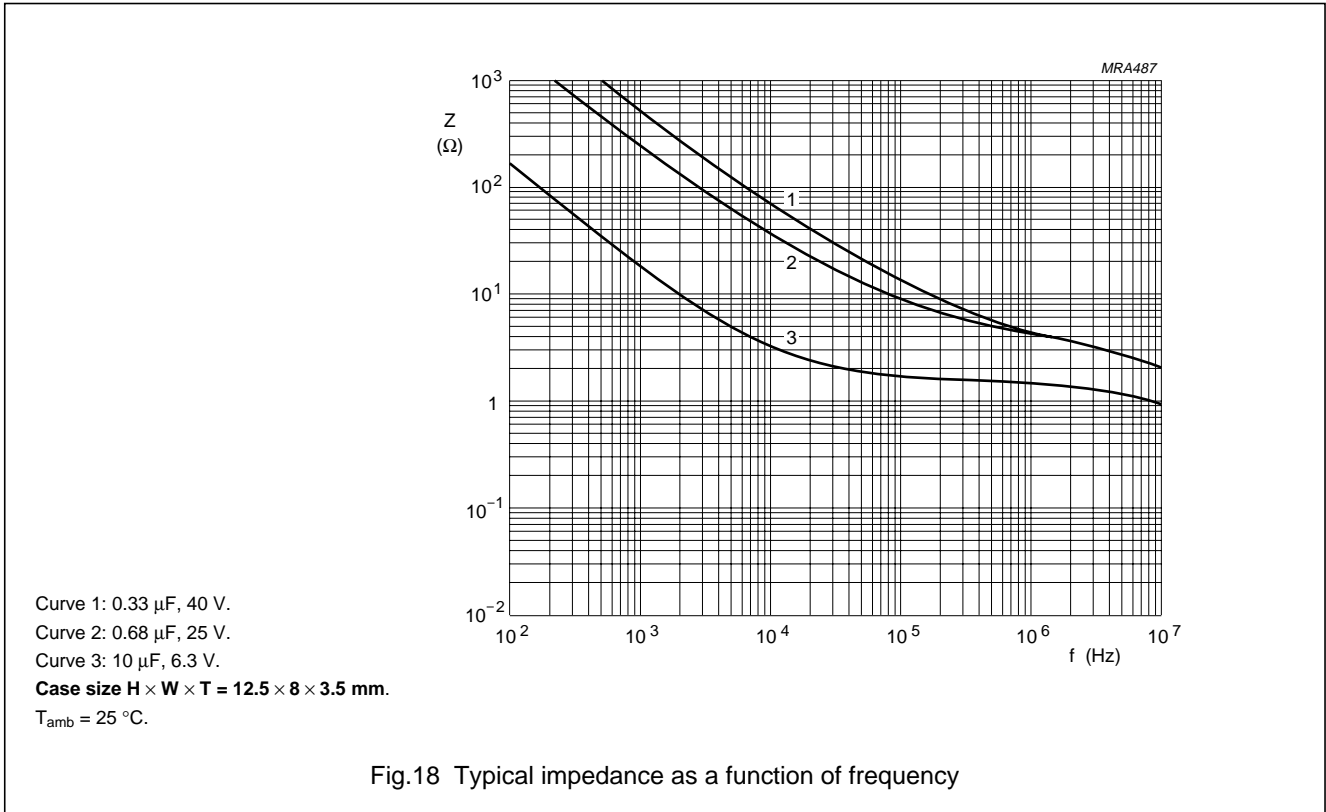

Aluminium electrolytic capacitors
Solid Al, Radial Pearl

122 SAL-RP

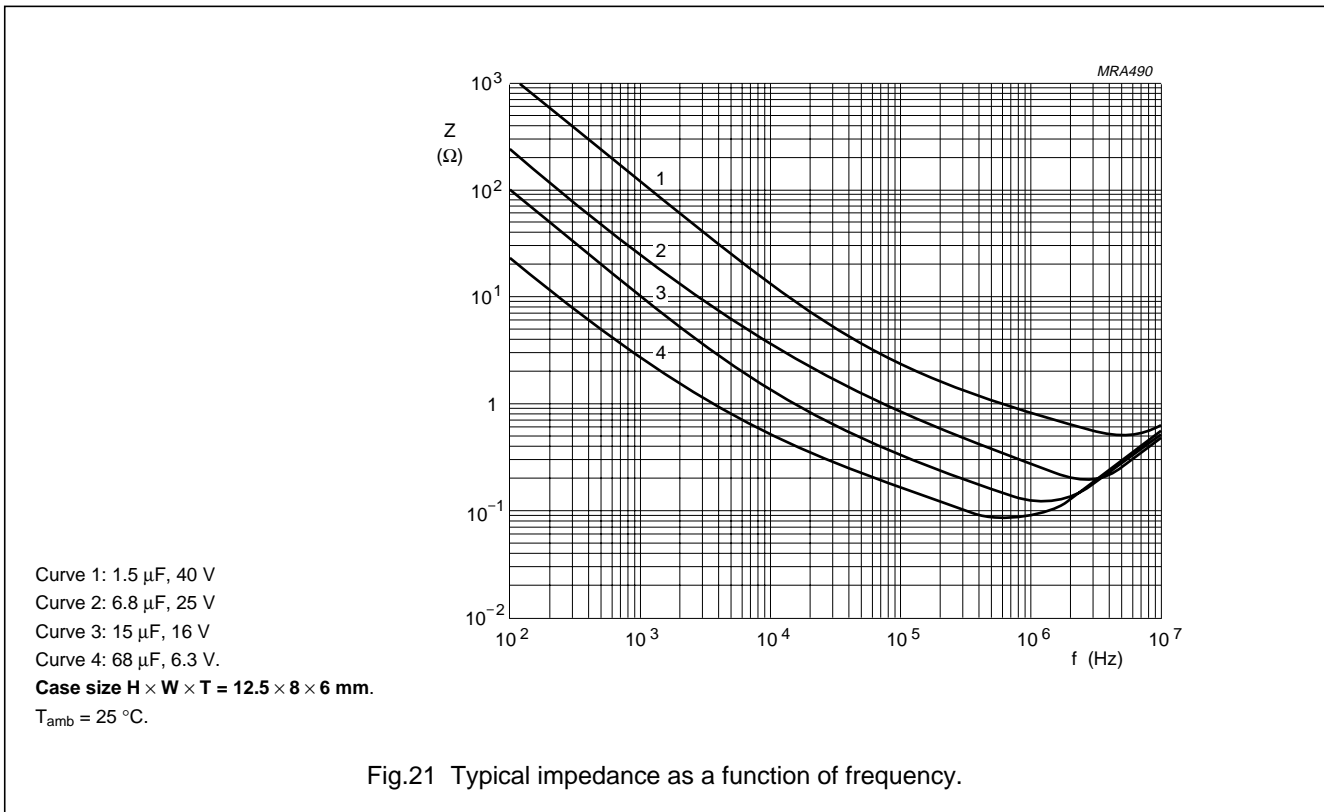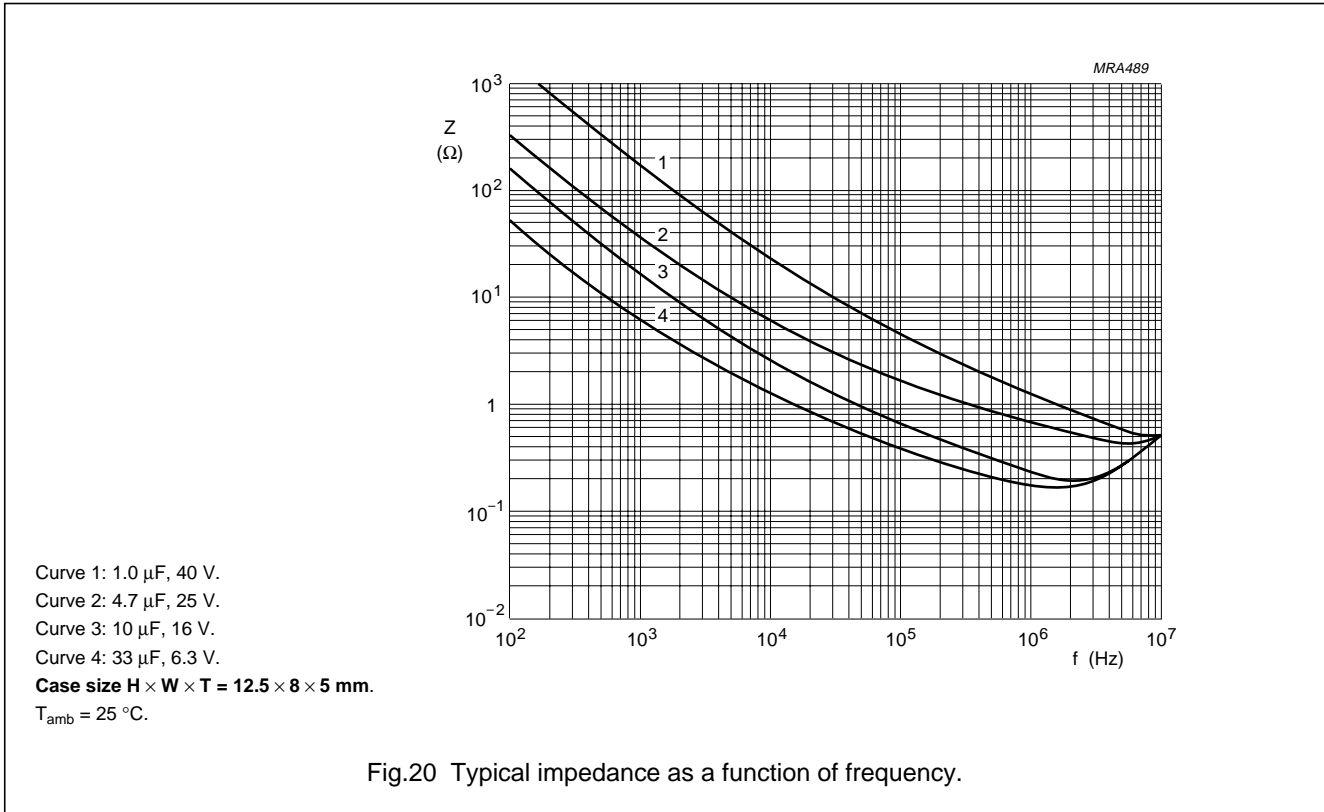

Aluminium electrolytic capacitors

Solid Al, Radial Pearl

122 SAL-RP

SPECIFIC TESTS AND REQUIREMENTS

General tests and requirements are specified in data handbook PA01, section "Tests and Requirements".

Table 3 Test procedures and requirements

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ CECC 30300 subclause 4.13	$T_{amb} = 125\text{ °C}$; $U_R = 6.3$ to 25 V with U_R applied; $U_R = 35$ and 40 V with U_C applied; 10000 hours	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30302 subclause 1.8.1	$T_{amb} = 125\text{ °C}$; I_R applied and $U_R = 6.3$ to 25 V with U_R applied; $U_R = 35$ and 40 V with U_C applied; 20000 hours	$\Delta C/C: \pm 15\%$ $\tan \delta \leq 1.5 \times \text{spec. limit}$ $Z \leq 1.5 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $< 1\%$
Shelf life (storage at high temperature)	IEC 60384-4/ CECC 30300 subclause 4.17	$T_{amb} = 125\text{ °C}$; no voltage applied; 500 hours	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1 \times \text{spec. limit}$
Charge and discharge	IEC 60384-4-2 subclause 9.21	10^6 cycles without series resistance: 0.5 s to U_R ; 0.5 s to ground	$\Delta C/C: \pm 5\%$ no short or open circuit, no visible damage
Solvent resistance	IEC 60068-2-45, test XA IEC 60653	immersion: 5 ± 0.5 minutes with or without ultrasonic at $55 \pm 5\text{ °C}$ solvents: demineralized water and/or calgonite solution (20 g/l)	visual appearance not affected

Aluminium electrolytic capacitors

Solid Al, Radial Pearl

122 SAL-RP

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Extended vibration	IEC 60068-2-6 test Fc	10 to 2000 Hz; 1.5 mm or 20 g; 1 octave/minute; 3 directions; 1 sweep per direction; no voltage applied	no intermittent contacts no breakdown no open circuiting no mechanical damage $\Delta C/C: \pm 5\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1.5 \times \text{spec. limit}$
Shock	IEC 60068-2-27 test Ea	half-sine or saw tooth pulse shape; 50 g; 11 ms; 3 successive shocks in each direction of 3 mutually perpendicular axes; no voltage applied	no intermittent contacts no breakdown no open circuiting no mechanical damage $\Delta C/C: \pm 5\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1.5 \times \text{spec. limit}$
Passive flammability	IEC 60695-2-2	capacitor mounted to a vertical printed-circuit board; one flame on capacitor body; $T_{\text{amb}} = 20 \text{ to } 25 \text{ }^\circ\text{C}$; test duration = 20 s	after removing the test flame from the capacitor, the capacitor must not continue to burn for more than 15 s; no burning particles must drop from the sample

CAUTION

CLEANING SOLVENTS, ADHESIVES, COATING MATERIALS

Some cleaning agents, adhesives or coating materials have an adverse affect on electrolytic capacitors. For cleaning, varnishing, coating, lacquering, embedding or gluing at the capacitor's sealing, ensure that the materials used are halogene-free in all their constituent parts (base material, thinners, binders, reacting agents, propellants, additives).

For further information regarding the correct use of electrolytic capacitors, please refer to data handbook PA01, section "Application guidelines".

Aluminium electrolytic capacitors
Solid Al, Radial Pearl

122 SAL-RP

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Customers of BC Components who are using or selling these products for use in such applications do so at their own risk and agree to fully indemnify BC Components for any damages resulting from such improper use or sale.