



INTERCOM

FEATURES

Single and double crimp connector.
 Conforms to HE13, HE14, IEC 603-8.
 Double Wipe Removable contact.
 AWG 22 - 24 - 26 - 28.

TECHNICAL DATA

Material
 Housing: black glass filled polyester UL94 V0.

Electrical

Current rating: 3 A maxi.
 Voltage: 500 V eff.
 Insulation resistance: 1×10^5 M Ω mini.
 Contact resistance: 20 m Ω maxi.

Mechanical

Temperature rating: -55°C to +125°C
 Maximum Insulation
 Diameter: \varnothing 1.45 mm
 Insertion force:
 Tin version: 3 N Maxi per contact
 Gold version: 1.5 N maxi per contact



Withdrawal force:

Tin version: 0.2 N mini per contact
 Gold version: 0.15 N mini per contact

PACKAGING

Recyclable cardboard boxes.

Tooling P/n: Crimping.

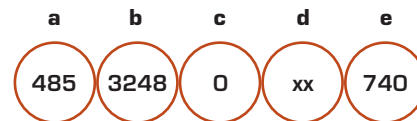

d Number of contacts from 02 to 20.

Housing to be used with contacts:
 485 3250 000 4xx

