

Series  
**NSX**

SIZE 1 SEALED COAXIAL SOCKET CONTACT  
WITH TNC ADAPTER  
BOEING P/N: BACC47EN-4

Issue:  
22 APRIL 07

Page  
1/1


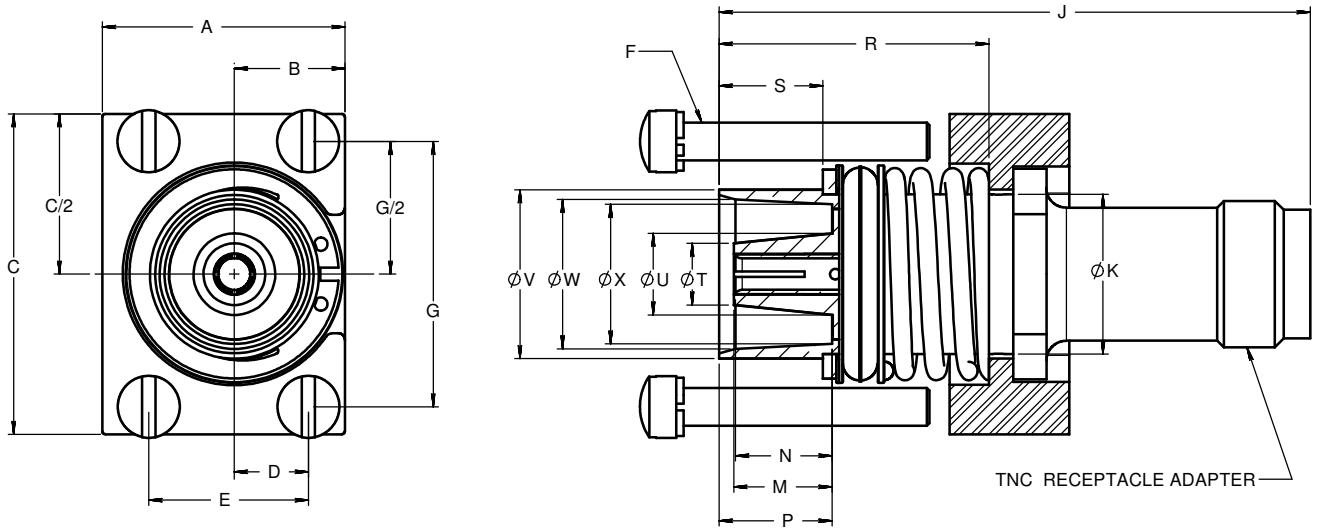


TABLE 1


A	B	C	D	E	F	G	J	ØK		
18,36(,723)	8,36(,329)	24,21(,953)	5,64(,222)	12,12(,477)	4-40 UNC	20,12(,792)	45,72(1,80)	12,12(,477)		
18,23(,718)	8,28(,326)	24,10(,949)	5,51(,217)	11,89(,468)		19,89(,783)	MAX	12,00(,472)		
M	N	P	R	S	ØT	ØU	ØV	ØW	ØX	
7,49(,295)	7,44(,293)	8,53(,336)	22,10(,0870)	7,87(,310)	4,80(,189)	6,20(,244)	12,75(,502)	11,33(,446)	10,54(,415)	
MAX	MAX	8,43(,332)	DATUM	7,77(,306)	MAX	MAX	12,65(,498)	11,18(,440)	10,44(,411)	

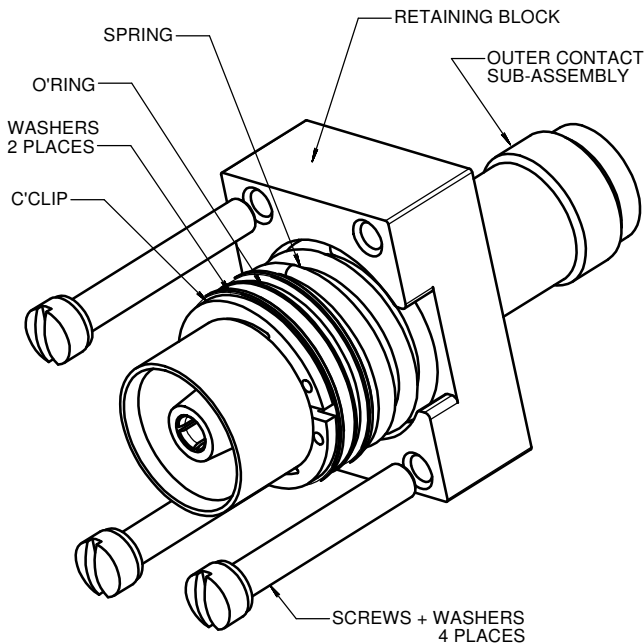

**MATERIAL AND FINISH:**

- OUTER BODY:  
BRASS PER ASTM B 16 OR ASTM B 453 OR EN12164  
GOLD PLATE PER AMS 2422 OVER NICKEL PER QQ N 290
- CENTER CONTACT:  
BERYLLIUM COPPER PER ASTM B 196  
GOLD PLATE PER AMS 2422 OVER NICKEL PER QQ N 290
- INSULATOR:  
PTFE PER ASTM D 1710 OR EQUIVALENT
- O-RING SEAL:  
FLUOROSILICONE PER SAE AMS R 25988
- RETAINING BLOCK:  
ALUMINUM ALLOY PER AMS QQ A 591  
BLACK ANODIC OXYDATION
- SCREWS, WASHERS, C'CLIP AND SPRING:  
STAINLESS STEEL  
PASSIVATED

DIMENSIONS : mm (inch are given for information only)



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

<b>CREATION</b>					
<b>PEN:</b>					
<b>NOM:</b> FALETTI					
<b>DATE:</b> 27 JULY 92					
<b>APPR.:</b>	23 APR.07	REDRAWN	MACARI	/	
	Issue	Revisions	Name	Approved	