


U_{rat} : 600 V

Char.: FF
(superfink / very quick-acting)

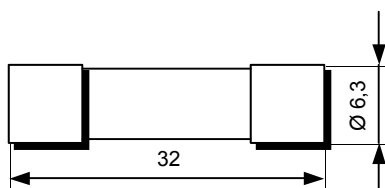


Bemessungsstrom Rated current A	Spannungsfall Voltage drop mV	Verlustleistung Power loss bei/at $1,2 \times I_{\text{rat}}$ [W]	Schaltvermögen Breaking capacity kA	Schmelzintegral I^2t -value A ² s
0,5	950	0,8	50 kA bei/at 600 V AC $\cos \varphi < 0,2$	0,14
1	1100	1,3		0,14
1,25	1000	1,6		0,22
1,6	900	1,9		0,31
2	800	2,4		0,64
2,5	800	2,7		1,2
3,15	700	3,0		2,0
4	500	3,2		5,0
5	400	3,6		10
6,3	400	4,0		3,0
8	350	4,5		6,5
10	350	5,0		12

G 09440 18032002/45



SIBA Sicherungen-Bau GmbH

Bereich  Geräteschutz

Borker Straße 20-22 · D-44534 Lünen

Telefon +49 (0) 2306 / 7001-90 · Telefax +49 (0) 2306 / 7001-99

e-mail: elu@siba.de