



DIMENSIONS mm (inches)

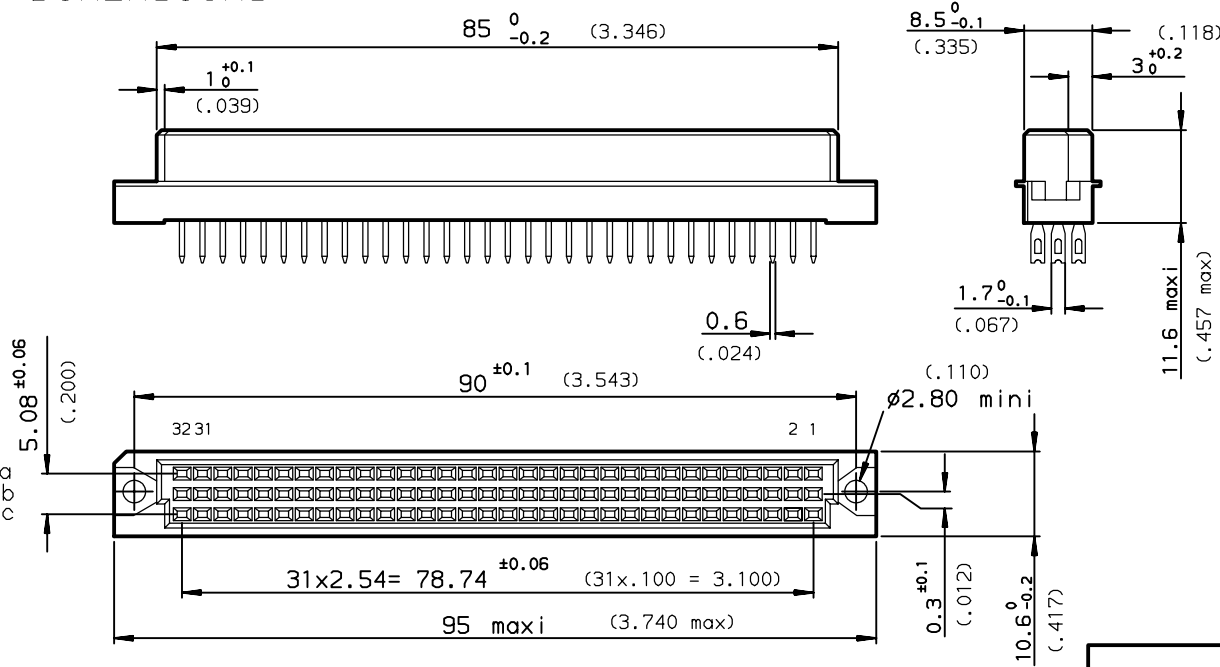

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C-8609-0000B

PART NUMBER	8609	<input type="checkbox"/>	<input type="checkbox"/>	81	<input type="checkbox"/>	7	<input type="checkbox"/>	5	<input type="checkbox"/>
PIN OUT									
rows a-b-c	---	---	---	3	---	---	---	96	
rows a-c	---	---	---	4	---	---	---	64	
NUMBER OF CONTACTS									
TERMINATION									
L1 = 5.35 ±0.35 (.210)	---	---	---	---	---	---	---	09	
L2 = 13.35 ±0.35 (.525)	---	---	---	---	---	---	---	10	
L1 and L2	---	---	---	---	---	---	---	08	
PERFORMANCE CLASS									
DIN 41612 class 3	---	---	---	---	---	---	---	4	
DIN 41612 class 2	---	---	---	---	---	---	---	5	
DIN 41612 class 1	---	---	---	---	---	---	---	6	
TERMINATION TYPE									
TIN LEAD	---	---	---	---	---	---	---	---	000E1
LEAD FREE	---	---	---	---	---	---	---	---	E1LF

TERMINATION

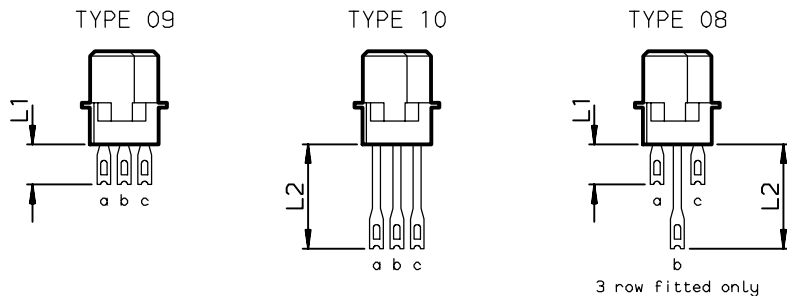

rev	ecn no	dr	date
A	-	RDU	1997/10/30
B	LS05-005	JTA	2005/03/17
C	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 <input checked="" type="checkbox"/>	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1997/10/30	ANGULAR	0.X ±0.1	size A3
Eng	TARON	1997/10/30	LINEAR	0.XX ±0.1	Scale 1.5
Chr	LEGARE	1997/10/30	0.XX' ±2'	0.XXX ±0.1	ECN LS06-0095
Appr	LEGARE	1997/10/30	Product family	DIN 8609	Spec ref -
		STRAIGHT FEMALE - STYLE C		dwg no	C-8609-0653
		SOLDER EYELET		Rev.	C
catalog no				CUSTOMER	sheet 1 of 1

European Views