DIMENSIONS mm (inches)

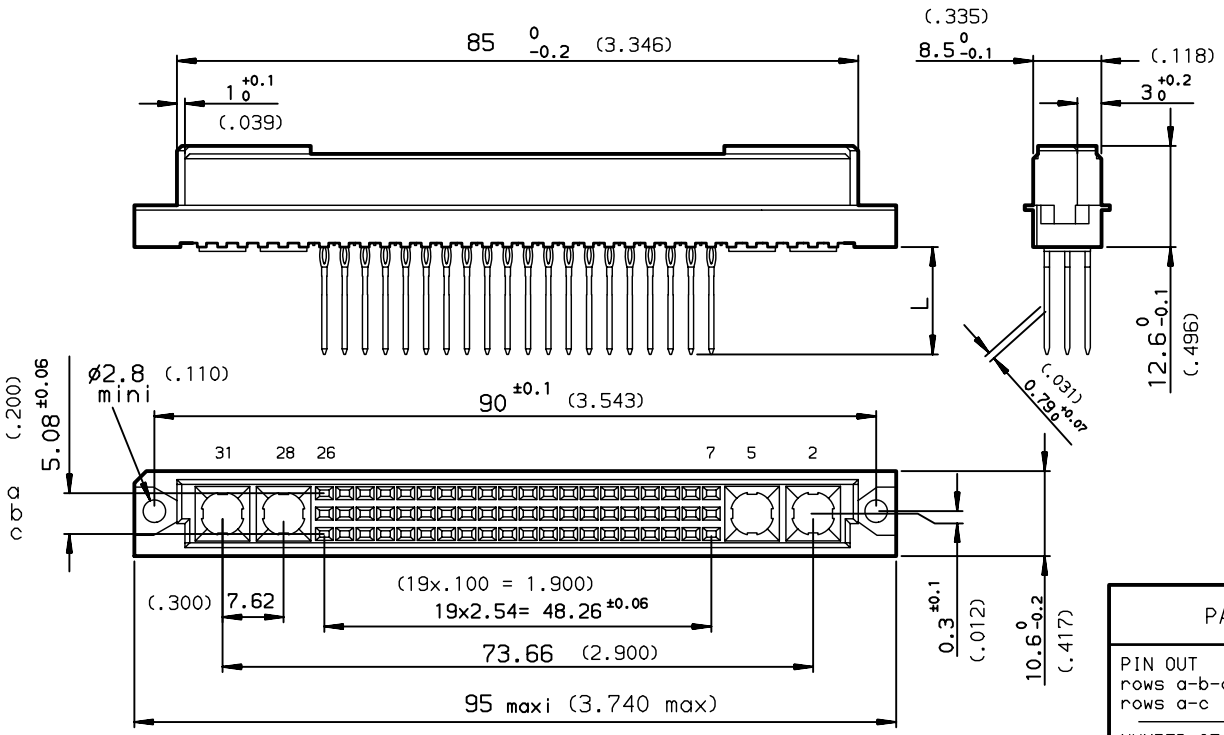

METHOD OF INSERTION
ON THE PCB = FLAT ROCK



PCB DRILLING
component side

PERFORMANCES AS PER DIN 41612

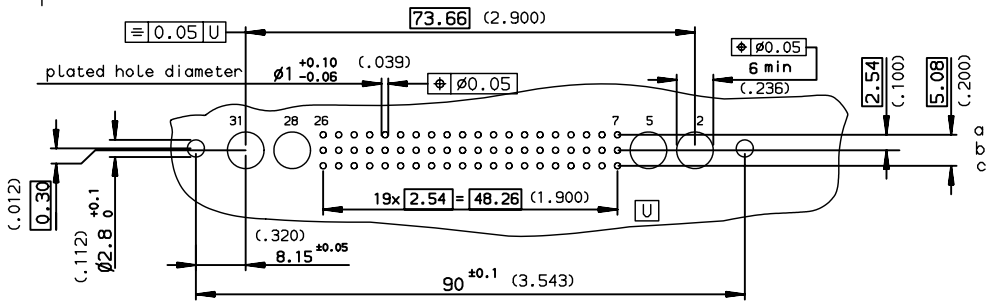

PART NUMBER	8609		D1		7	5	

PIN OUT
rows a-b-c — 3 — 60
rows a-c — 4 — 40

NUMBER OF CONTACTS

TERMINATION
L = 13.10 ±0.20 (.515) — 1 wrap — 91
L = 17.10 ±0.20 (.673) — 2 wraps — 92
L = 3.00 ±0.20 (.118) — short post — 94

PERFORMANCE CLASS
DIN 41612 class 3 — 4
DIN 41612 class 2 — 5
DIN 41612 class 1 — 6

TERMINATION TYPE
TIN LEAD — 000E3
LEAD FREE — E3LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000C

European Views

rev	ecn no	dr	date
B	-	ROU	1997/11/05
C	LS05-004	JTA	2005/02/28
D	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-
	-	-	

www.fciconnect.com	surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
	TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr ROUILLARD 1997/01/27	ANGULAR	LINEAR 0.X ±0.1	size A3
Eng TARON 1997/01/27		0.XX ±0.1	Scale 1.5
Chr LEGARE 1997/01/27	0.XX° ±2°	0.XXX ±0.1	ECN LS06-0095
Appr LEGARE 1997/01/27	Product family DIN 8609		Spec ref -

title: STRAIGHT FEMALE - STYLE M
PRESS FIT
dwg no C-8609-0556
Rev. D
catalog no -
CUSTOMER
sheet 1 of 1

Copyright FCI.

REV F - 2006-04-17

PDM: Rev:D STATUS: Released Printed: Aug 26, 2006