

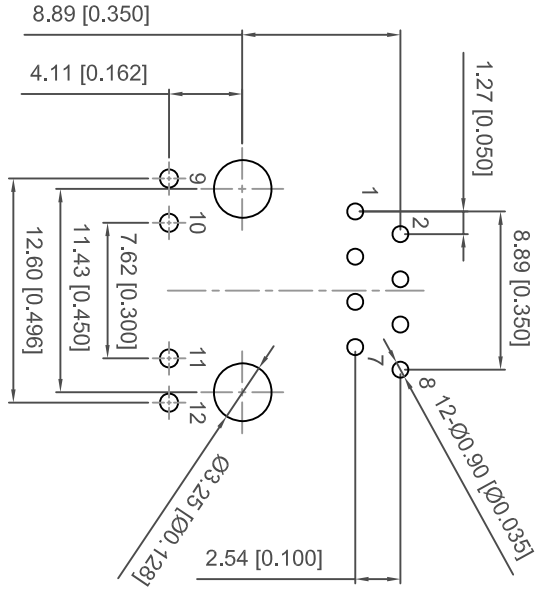


LED CIRCUIT:






TOLERANCE UNLESS OTHERWISE SPECIFIED IN MM:
 0.0 ± 0.25 [± 0.010] ANGLE ± 1°
 0.00 ± 0.13 [± 0.005]

THIS IS A C.A.D. GENERATED DRAWING
 DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	ORIGINAL	①
ADD GOLD PLATING PART NUMBER	R.STA.MONICA	②
ADD NICKEL PLATING SPECIFICATIONS	R.STA.MONICA	③
	SEPT.28/2011	
	SEPT.29/2011	

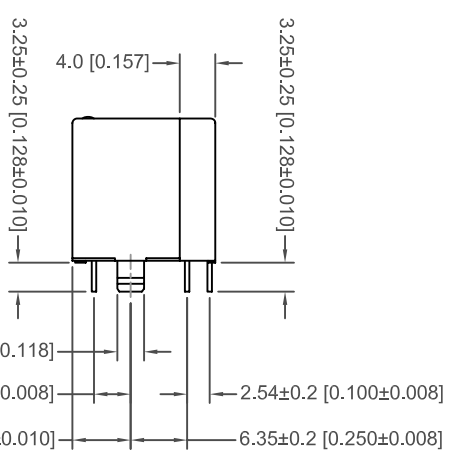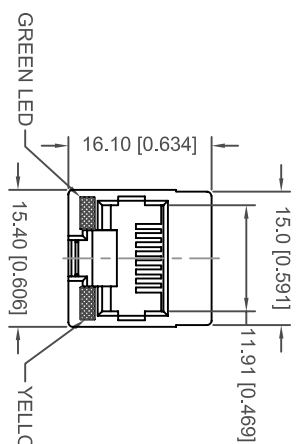

NOTES:

- MATERIALS:**
 HOUSING: PBT POLYESTER WITH MIXED GLASS FIBER, UL 94V-0, BLACK COLOR
 CONTACTS: 0.35MM PHOSPHOR BRONZE PLATED WITH SELECTIVE GOLD PLATING WITH GOLD FLASH IN SOLDER AREA ALL OVER 50 MICRO INCHES OF NICKEL, MINIMUM

PART NUMBER	CONTACT GOLD PLATING
A20-108-223-100	GOLD FLASH PLATING
A20-108-323-100	15 MICRO INCHES OF GOLD
A20-108-623-100	30 MICRO INCHES OF GOLD
A20-108-923-100	50 MICRO INCHES OF GOLD

2. CAVITY IS CONFORMING TO FCC RULES AND REGULATIONS PART 6, SUBPART F.
3. DIMENSION: MM [INCHES]

RECOMMENDED P.C.B. LAYOUT


**RJ45 MODULAR JACK
 NON-SHIELDED, VERTICAL WITH LED**

ACAD REFERENCE NO.:	A20-108-223-100
DRAWN:	R.STA.MONICA
DATE:	SEPT.15/2011
CHECKED:	DATE:
PART NUMBER	

SEE PART NUMBER	SHEET 1 OF 1
DRAWING NUMBER	ISSUE
A20-108-223-100	3



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/96/EC AND 2002/96/EC FOR RoHS COMPLIANCY.



EDAC INC
 TORONTO, ONTARIO
 CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.