


HOLE ARRANGEMENT:

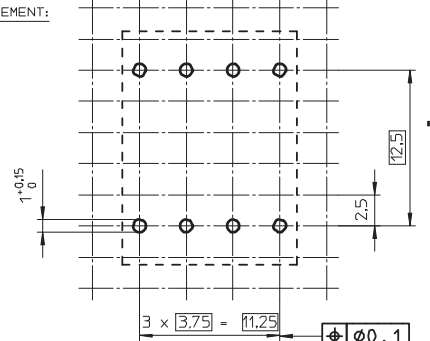

Coil former material: Sumikasuper (LCP), glass-reinforced
 UL file number: E54705 - UL94V-0,
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: 180°C.
 Resistance to soldering heat: 350°C - 2sec.
 Solderability: IEC 60068-2-20 Part 2, Test Ta, method 1.
 Winding area: 9,8 mm²
 Mean length of turn: 24,9mm.

CLASSNO.		CPV-RM5-1S-8PD-Z		4322 021 06211		03-02-25	
TECHN. LEADER	M. Veekens	DESIGNER	001	112 - 001	069	A3	
DATE	03-02-25	PROPERTY OF	FERROXCUBE 2000				