


**RADIATION HARDENED
POWER MOSFET
THRU-HOLE (TO-257AA)**

**IRHY57130CM
JANSR2N7484T3
100V, N-CHANNEL
REF: MIL-PRF-19500/702**

R5™ TECHNOLOGY

Product Summary

Part Number	Radiation Level	R _{Ds(on)}	I _D	QPL Part Number
IRHY57130CM	100K Rads (Si)	0.07Ω	18A*	JANSR2N7484T3
IRHY53130CM	300K Rads (Si)	0.07Ω	18A*	JANSF2N7484T3
IRHY54130CM	500K Rads (Si)	0.07Ω	18A*	JANSG2N7484T3
IRHY58130CM	1000K Rads (Si)	0.085Ω	18A*	JANSH2N7484T3

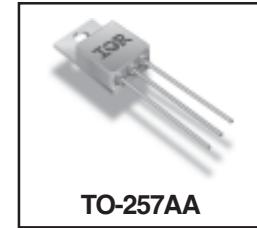

International Rectifier's R5™ technology provides high performance power MOSFETs for space applications. These devices have been characterized for Single Event Effects (SEE) with useful performance up to an LET of 80 (MeV/(mg/cm²)). The combination of low R_{Ds(on)} and low gate charge reduces the power losses in switching applications such as DC to DC converters and motor control. These devices retain all of the well established advantages of MOSFETs such as voltage control, fast switching, ease of paralleling and temperature stability of electrical parameters.

Features:

- Single Event Effect (SEE) Hardened
- Ultra Low R_{Ds(on)}
- Low Total Gate Charge
- Simple Drive Requirements
- Ease of Paralleling
- Hermetically Sealed
- Ceramic Eyelets
- Light Weight

Absolute Maximum Ratings

Pre-Irradiation

	Parameter	Units
I _D @ V _{GS} = 12V, T _C = 25°C	Continuous Drain Current	18*
I _D @ V _{GS} = 12V, T _C = 100°C	Continuous Drain Current	14
	I _{DM}	72
P _D @ T _C = 25°C	Max. Power Dissipation	75
	Linear Derating Factor	0.6
V _{GS}	Gate-to-Source Voltage	±20
E _{AS}	Single Pulse Avalanche Energy ②	87
I _{AR}	Avalanche Current ①	18
E _{AR}	Repetitive Avalanche Energy ①	7.5
dV/dt	Peak Diode Recovery dV/dt ③	1.4
T _J	Operating Junction	-55 to 150
T _{STG}	Storage Temperature Range	°C
	Lead Temperature	300 (0.063in./1.6mm from case for 10sec)
	Weight	4.3 (Typical)
		g

* Current is limited by package

For footnotes refer to the last page

www.irf.com

Electrical Characteristics @ $T_j = 25^\circ\text{C}$ (Unless Otherwise Specified)

	Parameter	Min	Typ	Max	Units	Test Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	100	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = 1.0\text{mA}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Temperature Coefficient of Breakdown Voltage	—	0.11	—	$\text{V}/^\circ\text{C}$	Reference to 25°C , $\text{I}_D = 1.0\text{mA}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source On-State Resistance	—	—	0.07	Ω	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 14\text{A}$ ④
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	—	4.0	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}, \text{I}_D = 1.0\text{mA}$
g_{fs}	Forward Transconductance	13	—	—	S	$\text{V}_{\text{DS}} \geq 15\text{V}, \text{I}_{\text{DS}} = 14\text{A}$ ④
I_{DSS}	Zero Gate Voltage Drain Current	—	—	10	μA	$\text{V}_{\text{DS}} = 80\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
		—	—	25		$\text{V}_{\text{DS}} = 80\text{V}, \text{V}_{\text{GS}} = 0\text{V}, T_j = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Leakage Forward	—	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
Q_g	Total Gate Charge	—	—	50	nC	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 18\text{A}$
Q_{gs}	Gate-to-Source Charge	—	—	7.4		$\text{V}_{\text{DS}} = 50\text{V}$
Q_{gd}	Gate-to-Drain ('Miller') Charge	—	—	20		
$t_{\text{d(on)}}$	Turn-On Delay Time	—	—	25	ns	$\text{V}_{\text{DD}} = 50\text{V}, \text{I}_D = 18\text{A}, \text{V}_{\text{GS}} = 12\text{V}, \text{R}_G = 7.5\Omega$
t_r	Rise Time	—	—	100		
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	—	35		
t_f	Fall Time	—	—	30		
$L_S + L_D$	Total Inductance	—	6.8	—	nH	Measured from drain lead (6mm/0.25in. from package) to source lead (6mm/0.25in. from package)
C_{iss}	Input Capacitance	—	1005	—	pF	$\text{V}_{\text{GS}} = 0\text{V}, \text{V}_{\text{DS}} = 25\text{V}$ $f = 1.0\text{MHz}$
C_{oss}	Output Capacitance	—	365	—		
C_{rss}	Reverse Transfer Capacitance	—	50	—		

Source-Drain Diode Ratings and Characteristics

	Parameter	Min	Typ	Max	Units	Test Conditions
I_S	Continuous Source Current (Body Diode)	—	—	18*	A	$T_j = 25^\circ\text{C}, I_S = 18\text{A}, \text{V}_{\text{GS}} = 0\text{V}$ ④
I_{SM}	Pulse Source Current (Body Diode) ①	—	—	72		
V_{SD}	Diode Forward Voltage	—	—	1.2	V	$T_j = 25^\circ\text{C}, I_F = 18\text{A}, dI/dt \leq 100\text{A}/\mu\text{s}$
t_{rr}	Reverse Recovery Time	—	—	250	ns	$V_{DD} \leq 25\text{V}$ ④
Q_{RR}	Reverse Recovery Charge	—	—	850		
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by $L_S + L_D$.				

* Current is limited by package

Thermal Resistance

	Parameter	Min	Typ	Max	Units	Test Conditions
R_{thJC}	Junction-to-Case	—	—	1.67	$^\circ\text{C/W}$	
R_{thJA}	Junction-to-Ambient	—	—	80		

Note: Corresponding Spice and Saber models are available on International Rectifier Web site.

For footnotes refer to the last page

Radiation Characteristics

IRHY57130CM, JANSR2N7484T3

International Rectifier Radiation Hardened MOSFETs are tested to verify their radiation hardness capability. The hardness assurance program at International Rectifier is comprised of two radiation environments. Every manufacturing lot is tested for total ionizing dose (per notes 5 and 6) using the TO-3 package. Both pre- and post-irradiation performance are tested and specified using the same drive circuitry and test conditions in order to provide a direct comparison.

Table 1. Electrical Characteristics @ $T_j = 25^\circ\text{C}$, Post Total Dose Irradiation ^(5,6)

	Parameter	Up to 500K Rads(Si) ¹				Units	Test Conditions
		Min	Max	Min	Max		
BV_{DSS}	Drain-to-Source Breakdown Voltage	100	—	100	—	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_D = 1.0\text{mA}$
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	4.0	1.5	4.0		$\text{V}_{\text{GS}} = \text{V}_{\text{DS}}, \text{I}_D = 1.0\text{mA}$
I_{GSS}	Gate-to-Source Leakage Forward	—	100	—	100	nA	$\text{V}_{\text{GS}} = 20\text{V}$
I_{GSS}	Gate-to-Source Leakage Reverse	—	-100	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
I_{DSS}	Zero Gate Voltage Drain Current	—	10	—	25	μA	$\text{V}_{\text{DS}} = 80\text{V}, \text{V}_{\text{GS}} = 0\text{V}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ⁽⁴⁾ On-State Resistance (TO-3)	—	0.074	—	0.09	Ω	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 14\text{A}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source ⁽⁴⁾ On-State Resistance (TO-257AA)	—	0.064	—	0.085	Ω	$\text{V}_{\text{GS}} = 12\text{V}, \text{I}_D = 14\text{A}$
V_{SD}	Diode Forward Voltage ⁽⁴⁾	—	1.2	—	1.2	V	$\text{V}_{\text{GS}} = 0\text{V}, \text{I}_S = 18\text{A}$

1. Part numbers IRHY57130CM (JANSR2N7484T3), IRHY53130CM (JANSF2N7484T3) and IRHY54130CM (JANSG2N7484T3)

2. Part number IRHY58130CM (JANSH2N7484T3)

International Rectifier radiation hardened MOSFETs have been characterized in heavy ion environment for Single Event Effects (SEE). Single Event Effects characterization is illustrated in Fig. a and Table 2.

Table 2. Typical Single Event Effect Safe Operating Area

LET (MeV/(mg/cm ²))	Energy (MeV)	Range (μm)	VDS (V)				
			@ $\text{V}_{\text{GS}} = 0\text{V}$	@ $\text{V}_{\text{GS}} = -5\text{V}$	@ $\text{V}_{\text{GS}} = -10\text{V}$	@ $\text{V}_{\text{GS}} = -15\text{V}$	@ $\text{V}_{\text{GS}} = -20\text{V}$
$38 \pm 5\%$	$300 \pm 7.5\%$	$38 \pm 7.5\%$	100	100	100	100	100
$61 \pm 5\%$	$330 \pm 7.5\%$	$31 \pm 10\%$	100	100	100	35	25
$84 \pm 5\%$	$350 \pm 10\%$	$28 \pm 7.5\%$	100	100	80	25	-

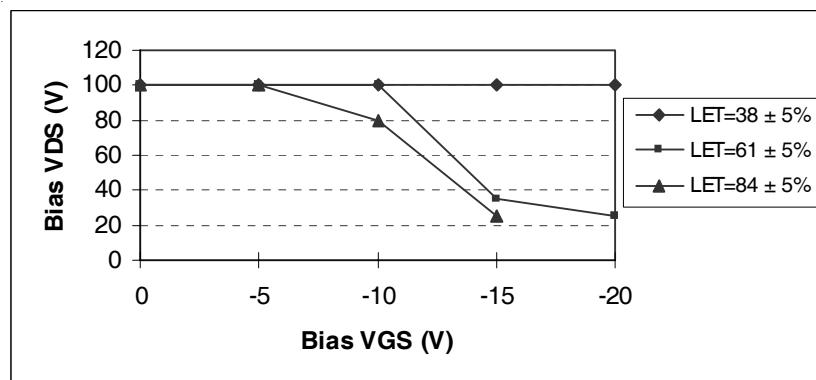


Fig a. Typical Single Event Effect, Safe Operating Area

For footnotes refer to the last page

IRHY57130CM, JANSR2N7484T3

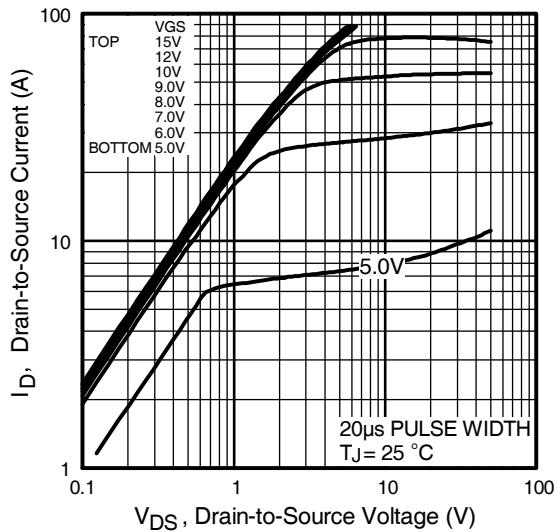


Fig 1. Typical Output Characteristics

Pre-Irradiation

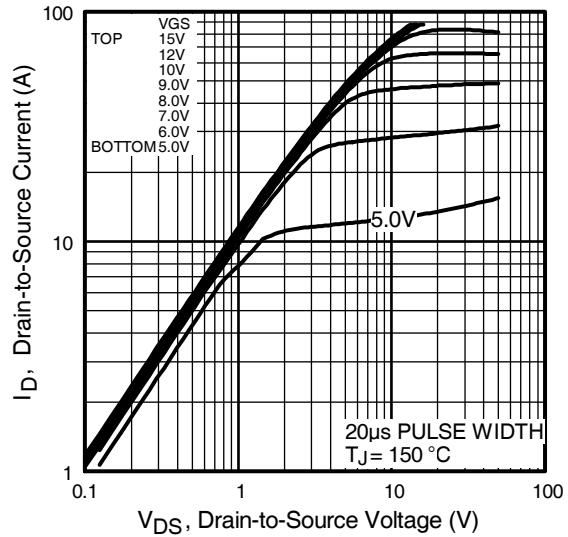


Fig 2. Typical Output Characteristics

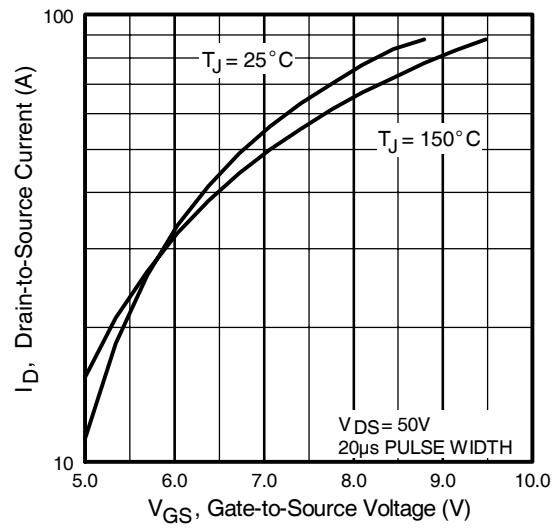


Fig 3. Typical Transfer Characteristics

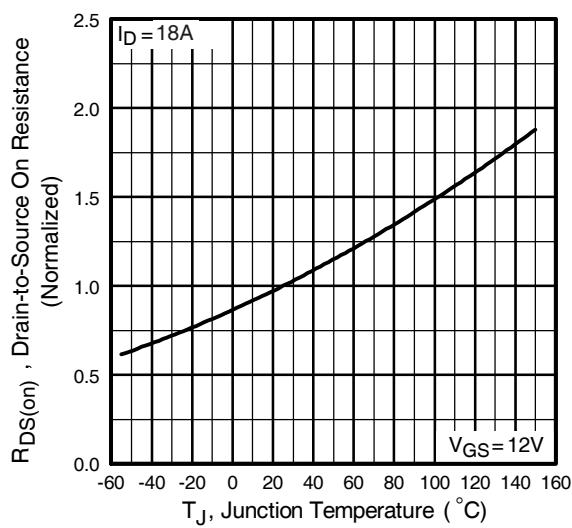


Fig 4. Normalized On-Resistance Vs. Temperature

Pre-Irradiation

IRHY57130CM, JANSR2N7484T3

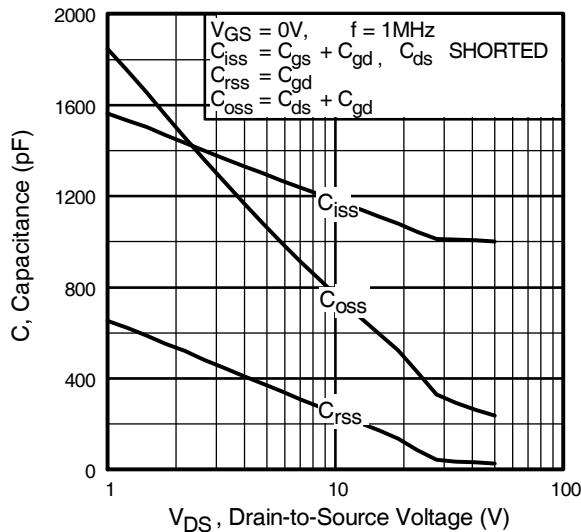


Fig 5. Typical Capacitance Vs.
Drain-to-Source Voltage

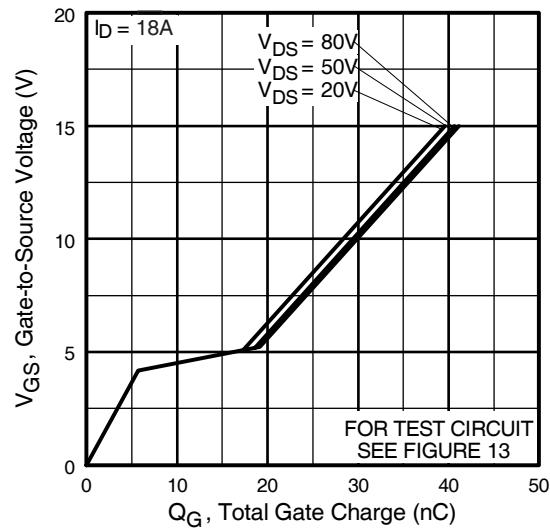


Fig 6. Typical Gate Charge Vs.
Gate-to-Source Voltage

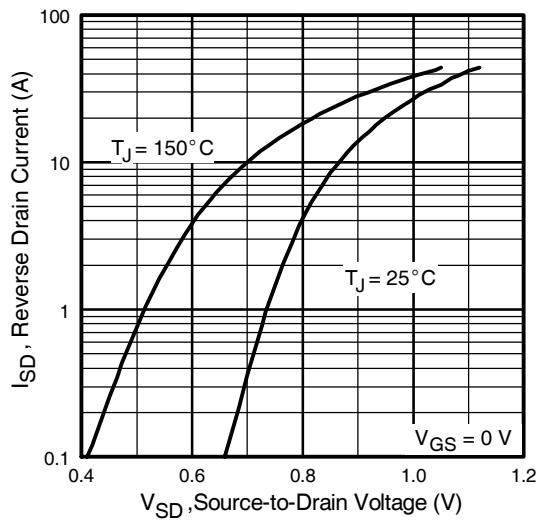


Fig 7. Typical Source-Drain Diode
Forward Voltage

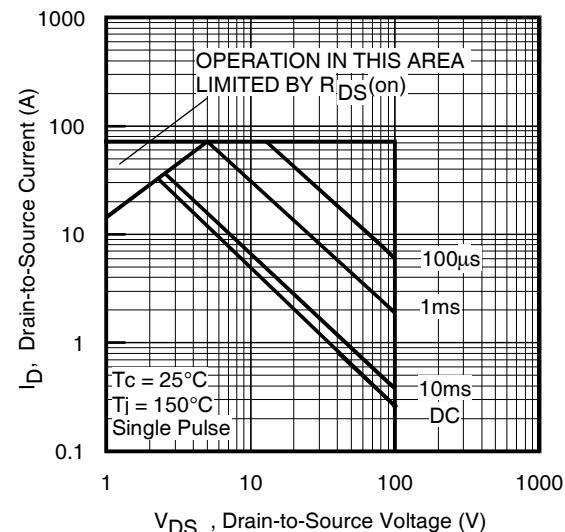


Fig 8. Maximum Safe Operating Area

IRHY57130CM, JANSR2N7484T3

Pre-Irradiation

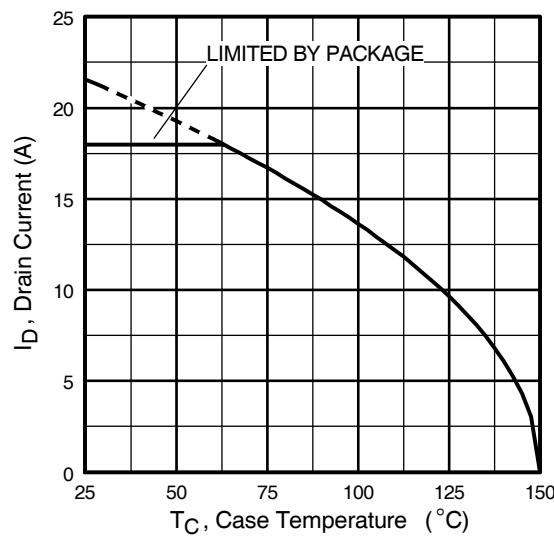


Fig 9. Maximum Drain Current Vs.
Case Temperature

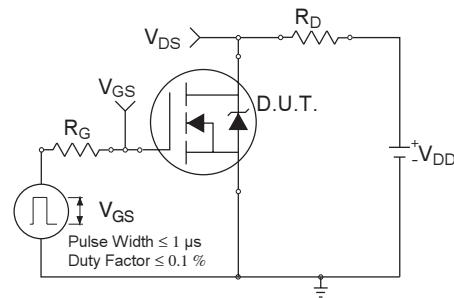


Fig 10a. Switching Time Test Circuit

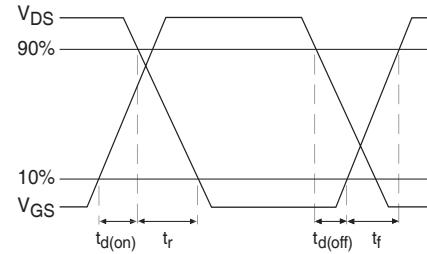


Fig 10b. Switching Time Waveforms

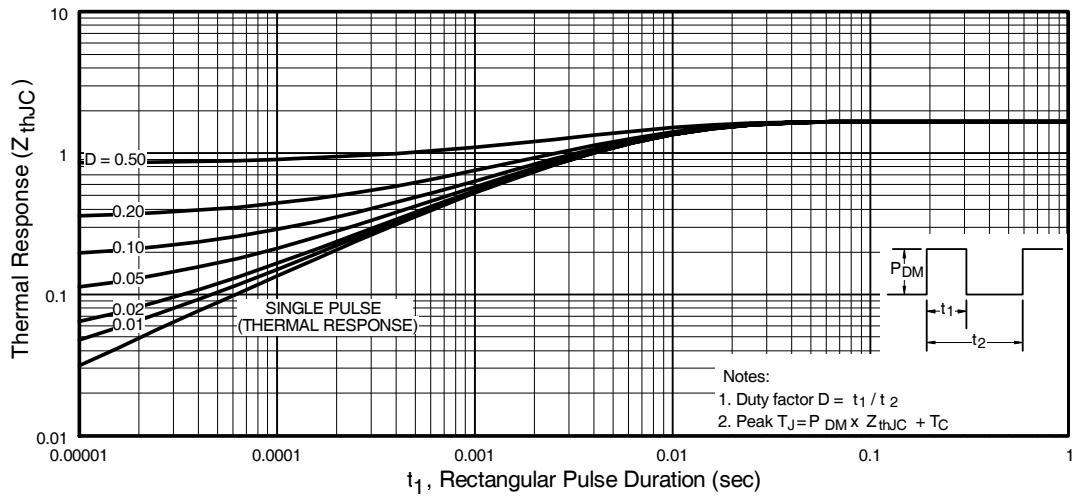


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

Pre-Irradiation

IRHY57130CM, JANSR2N7484T3

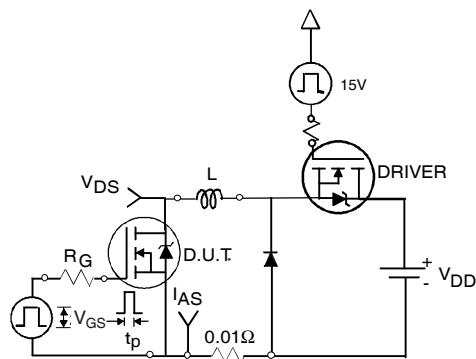


Fig 12a. Unclamped Inductive Test Circuit

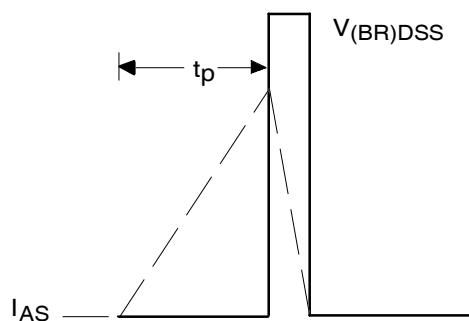


Fig 12b. Unclamped Inductive Waveforms

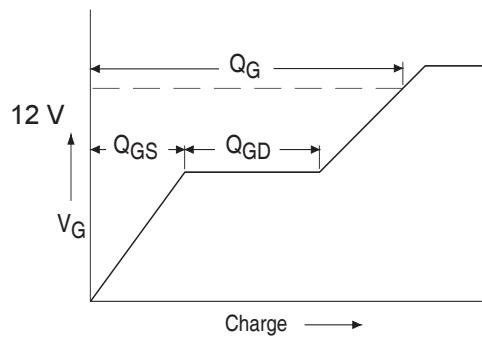


Fig 13a. Basic Gate Charge Waveform

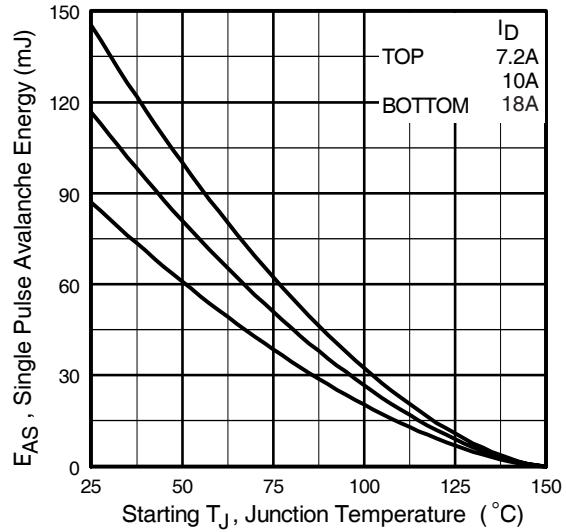


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

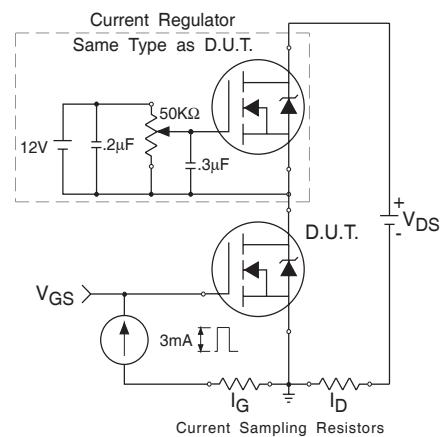
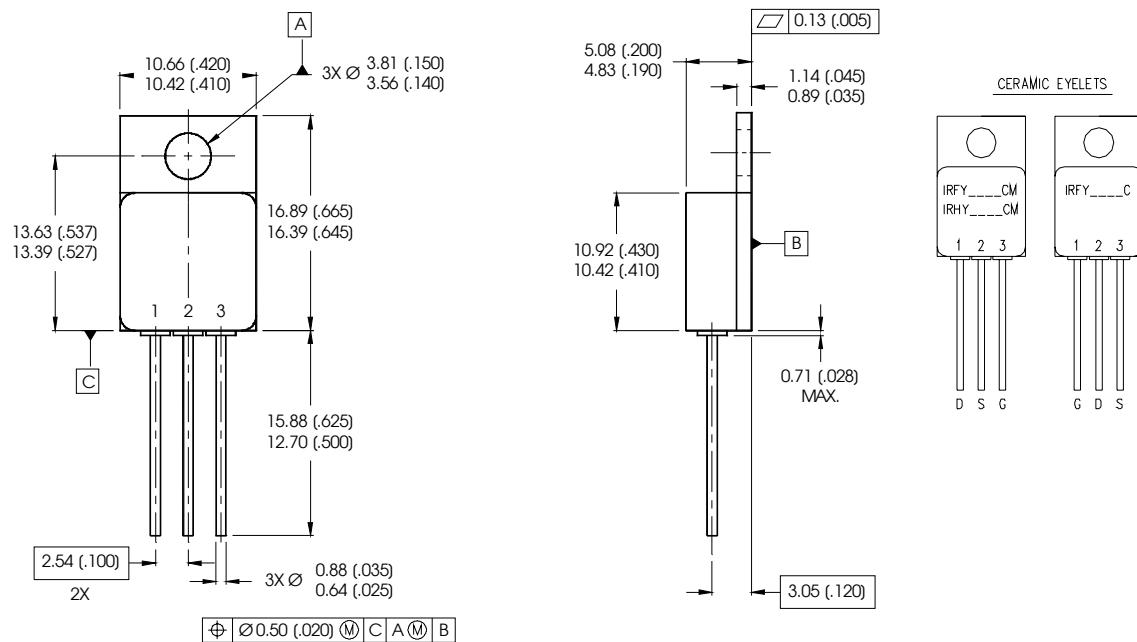


Fig 13b. Gate Charge Test Circuit

Footnotes:

- ① Repetitive Rating; Pulse width limited by maximum junction temperature.
- ② V_{DD} = 50V, starting T_J = 25°C, L = 0.53mH
Peak I_L = 18A, V_{GS} = 12V
- ③ I_{SD} ≤ 18A, dI/dt ≤ 155A/μs,
V_{DD} ≤ 100V, T_J ≤ 150°C
- ④ Pulse width ≤ 300 μs; Duty Cycle ≤ 2%
- ⑤ **Total Dose Irradiation with V_{GS} Bias.**
12 volt V_{GS} applied and V_{DS} = 0 during irradiation per MIL-STD-750, method 1019, condition A.
- ⑥ **Total Dose Irradiation with V_{DS} Bias.**
80 volt V_{DS} applied and V_{GS} = 0 during irradiation per MIL-STD-750, method 1019, condition A.

Case Outline and Dimensions — TO-257AA**NOTES:**

1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).
4. OUTLINE CONFORMS TO JEDEC OUTLINE TO-257AA.

PIN ASSIGNMENTS

- 1 = DRAIN
2 = SOURCE
3 = GATE

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
IR LEOMINSTER : 205 Crawford St., Leominster, Massachusetts 01453, USA Tel: (978) 534-5776
 TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.
Data and specifications subject to change without notice. 10/2011