


**L1382 PANEL FUSEHOLDER, BARRIER
AND PANEL SEALED**

Design facilitates use with either heavy duty size 0 fuse links or glass fuse links. This rugged fuseholder is specified for many government equipment. The end terminal is identified LIVE. A version of this fuseholder with a 2.4mm diameter test probe aperture in the head is available under reference L1382/H.

CURRENT RATING:	7A (temperature rise to <math><40^{\circ}\text{C}</math>) 15A at 55°C maximum
TEMPERATURE RANGE:	-55°C to +70°C (ambient)
BREAKDOWN VOLTAGE (DC):	>10kV
INSERTION RESISTANCE	<15 milliohms
INSULATION RESISTANCE	>100 megohms
PANEL THICKNESS (MAX):	4mm
FIXING TORQUE:	1.7 Nm
HUMIDITY:	H5 (DEF-5011)
MATERIAL:	Moulding, phenolic
APPROVALS:	Conforms to BT 136F, DEF 59-100

ORDERING REFERENCE: L1382

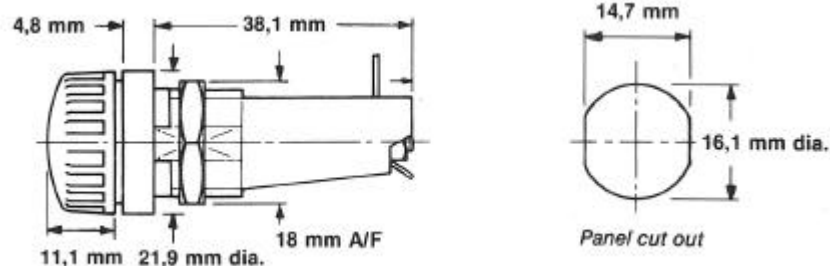

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England

Tel: +44 (0) 1638 665161 Fax: +44 (0) 1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>

□

A subsidiary of Dialight plc