

# Wideband amplifier module


OM2045

## DESCRIPTION

A one-stage wideband amplifier in hybrid integrated circuit form on a thin-film substrate. The device is intended as an aerial amplifier in car radios, caravans or RATV and MATV systems.

## PINNING

PIN	DESCRIPTION
1	input
2	common
3	common
4	supply (+)
5	output

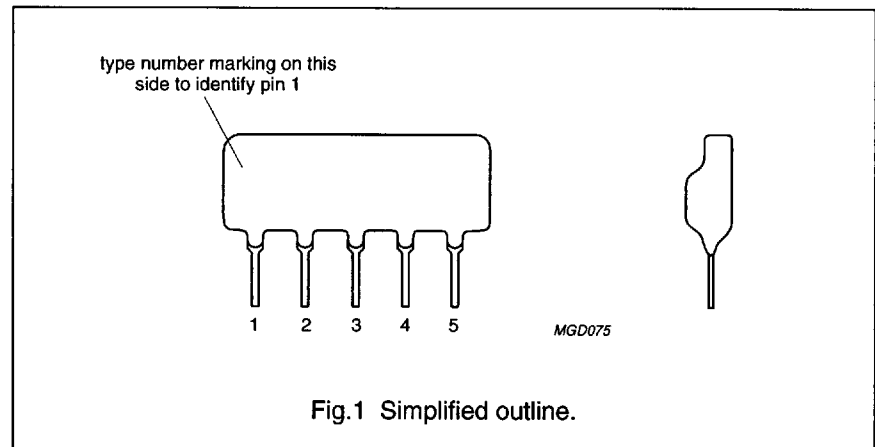



## QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
f	frequency range		40	–	860	MHz
Z <sub>S</sub> , Z <sub>L</sub>	source and load impedance		–	75	–	Ω
G <sub>T</sub>	transducer gain =  S <sub>21</sub>   <sup>2</sup>		–	12	–	dB
ΔG <sub>T</sub>	flatness of frequency response		–	1	–	dB
V <sub>o(rms)</sub>	output voltage (RMS value)	d <sub>im</sub> = –60 dB; 3rd order intermodulation (3-tone)	–	99	–	dBμV
F	noise figure		–	3.6	–	dB
V <sub>B</sub>	DC supply voltage		10.8	12	13.2	V
T <sub>amb</sub>	ambient operating temperature		–20	–	+70	°C

Wideband amplifier module

OM2045

CIRCUIT DIAGRAM AND PRINTED-CIRCUIT BOARD

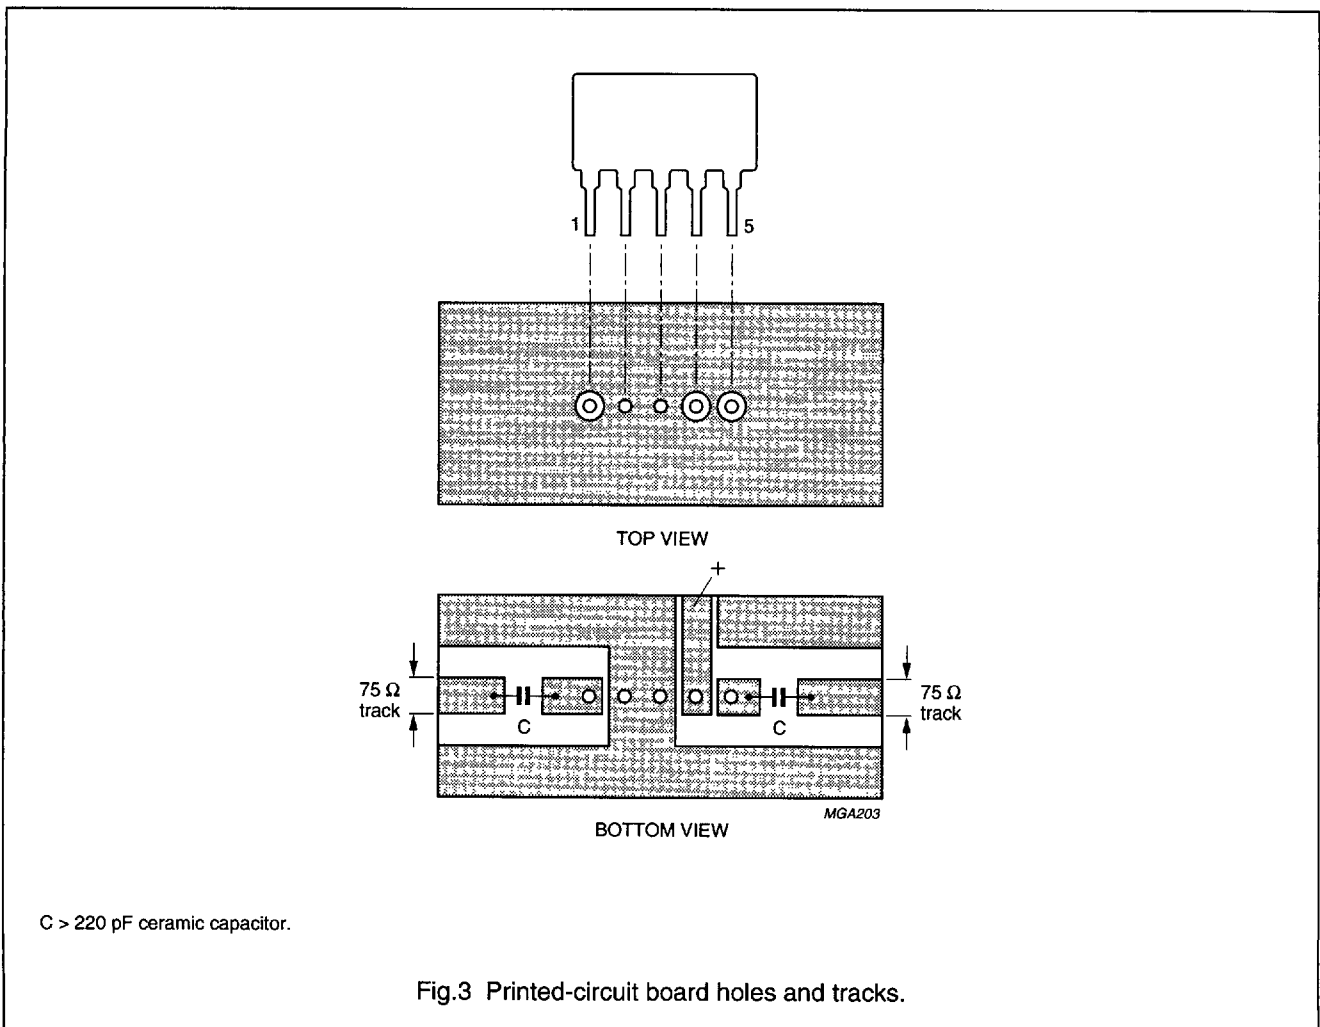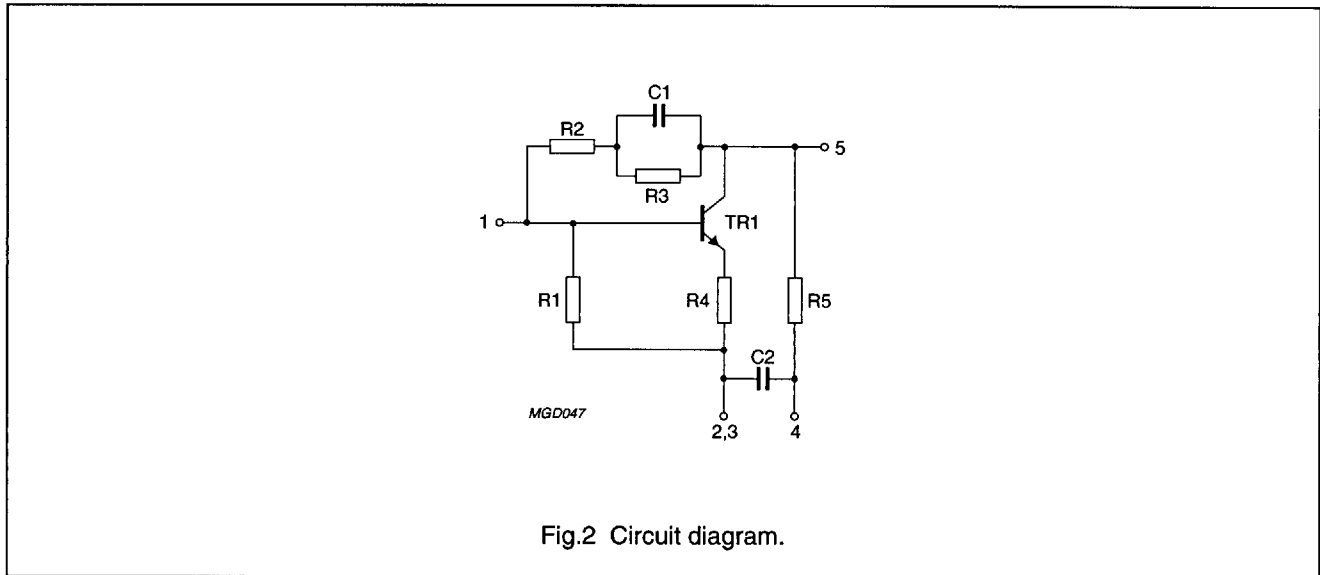

## Wideband amplifier module

OM2045

**LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
$T_{amb}$	ambient operating temperature	-20	+70	°C
$T_{stg}$	storage temperature	-40	+125	°C
$V_B$	DC supply voltage	-	15	V
$P_{IM}$	peak incident powers on pins 1 and 5	-	100	mW

**CHARACTERISTICS**




SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
<b>Measuring conditions</b>						
$T_{amb}$	ambient operating temperature		-	25	-	°C
$V_B$	DC supply voltage		-	12	-	V
$Z_S$	source impedance		-	75	-	$\Omega$
$Z_L$	load impedance		-	75	-	$\Omega$
$Z_0$	characteristic impedance of HF connections		-	75	-	$\Omega$
f	frequency range		40	-	860	MHz
<b>Performance</b>						
$I_B$	supply current		-	11.5	-	mA
$G_T$	transducer gain = $ S_{21} ^2$		-	12	-	dB
$\Delta G_T$	flatness of frequency response		-	1	-	dB
$VSWR_{in}$	individual maximum VSWR	input; note 1	-	2.0	-	
$VSWR_{out}$	individual maximum VSWR	output; note 1	-	1.4	-	
$ S_{12} ^2$	back attenuation	f = 100 MHz	-	22	-	dB
		f = 860 MHz	-	19	-	dB
$V_{o(rms)}$	output voltage (RMS value)	$d_{im} = -60$ dB; 3rd order intermodulation (3-tone)	-	99	-	dB $\mu$ V
F	noise figure		-	3.6	-	dB
<b>Operating conditions</b>						
$T_{amb}$	ambient operating temperature		-20	-	+70	°C
$V_B$	DC supply voltage		10.8	12	13.2	V
f	frequency range		40	-	860	MHz
$Z_S$	source impedance		-	75	-	$\Omega$
$Z_L$	load impedance		-	75	-	$\Omega$

**Note**

- Highest value (for sample) occurring in the frequency range.

Wideband amplifier module

OM2045

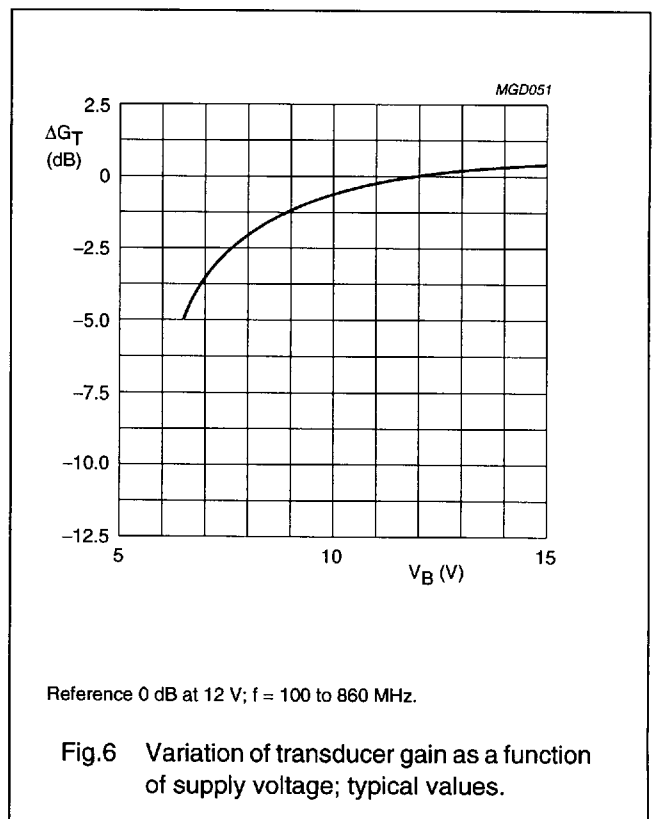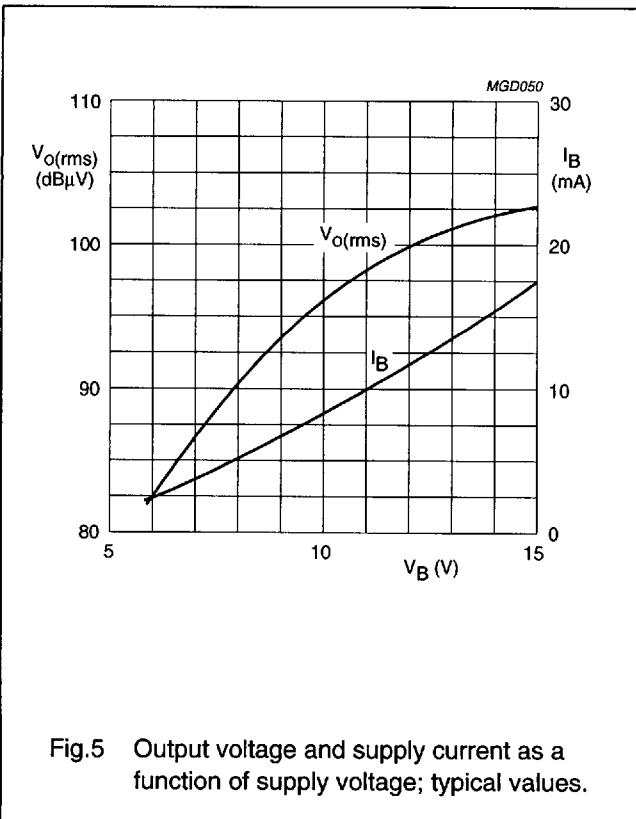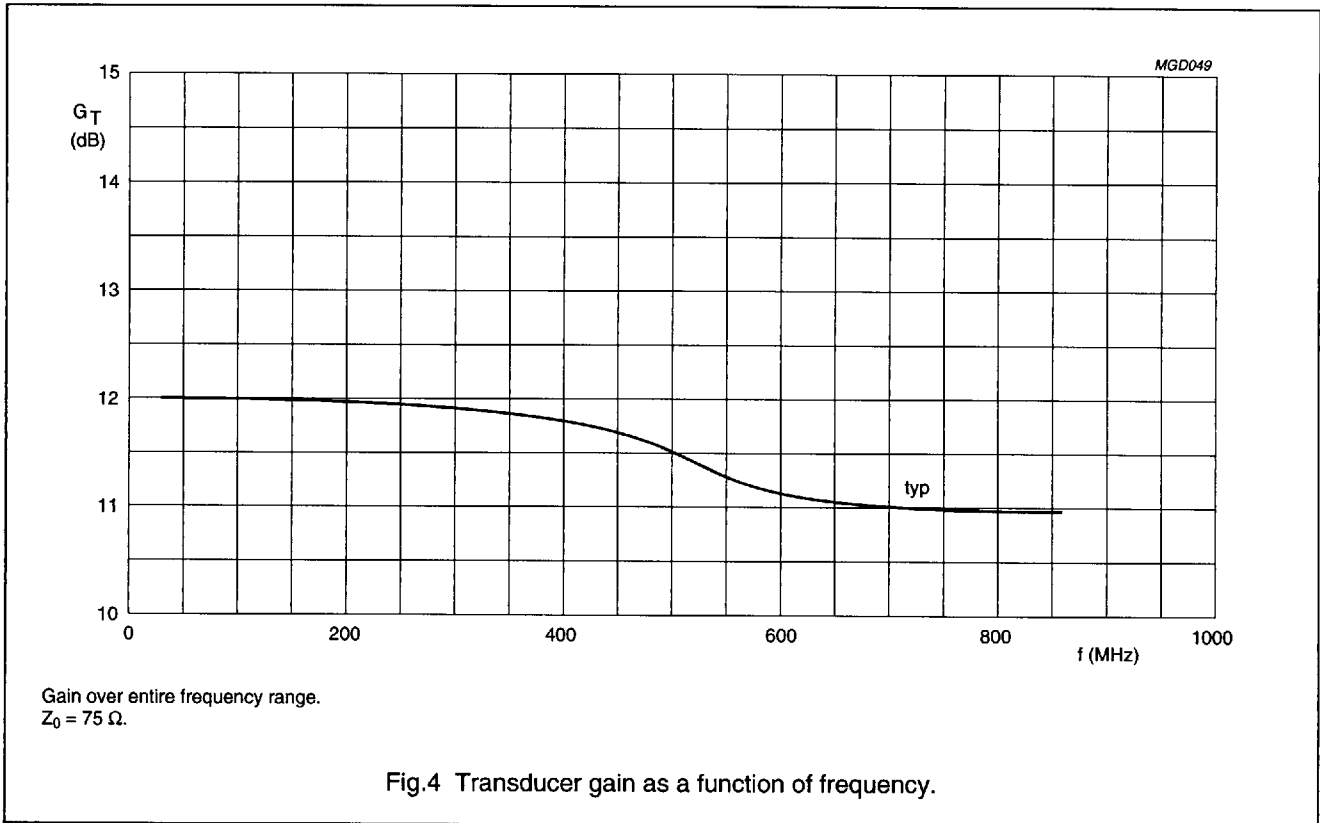

Wideband amplifier module

OM2045

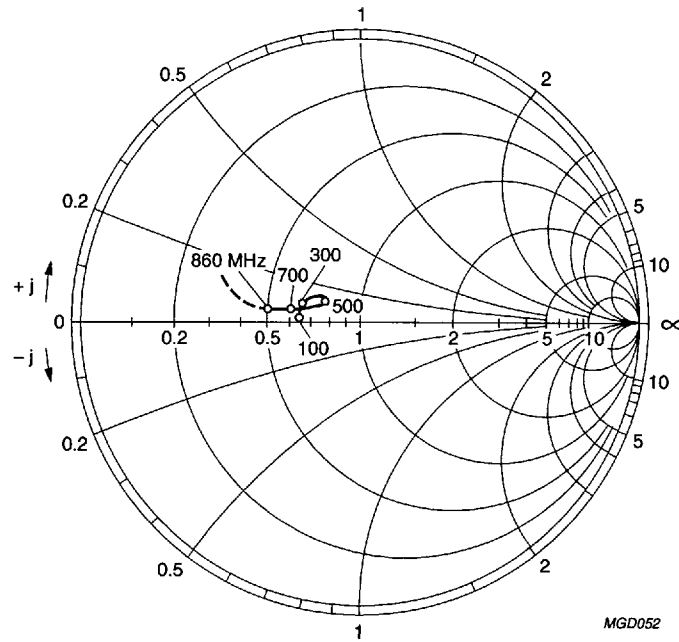


Fig.7 Input impedance derived from input reflection coefficient ( $S_{11}$ ), co-ordinates in ohms  $\times$  75; typical values.

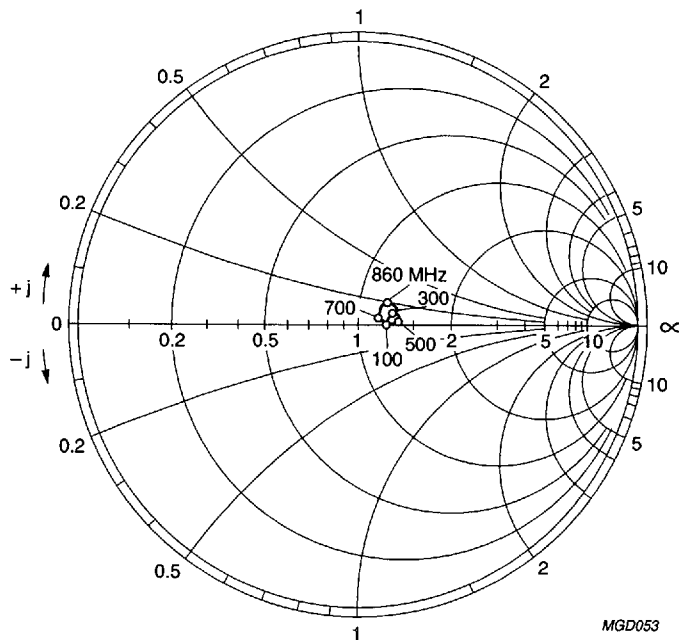


Fig.8 Output impedance derived from output reflection coefficient ( $S_{22}$ ), co-ordinates in ohms  $\times$  75; typical values.

# Wideband amplifier module

OM2045

## MOUNTING

The module should preferably be mounted on a double-sided printed-circuit board, see Fig.3. Input and output should be connected to 75 Ω tracks. The connection to the common pins should be as close to the seating plane as possible.

## SOLDERING

### Hand soldering

The maximum contact time for a soldering iron temperature of 260 °C up to the seating plane is 5 s.

### Dip or wave soldering


The maximum permissible temperature for the solder is 260 °C. It must not be in contact with the joint for more than 5 s.

The total contact time of successive solder waves must not exceed 5 s.

The device may be mounted against the printed-circuit board, but the temperature of the device must not exceed 125 °C.

If the printed-circuit board has been pre-heated, forced cooling may be necessary immediately after soldering to keep the temperature below the allowable limit.

## PACKAGE OUTLINE

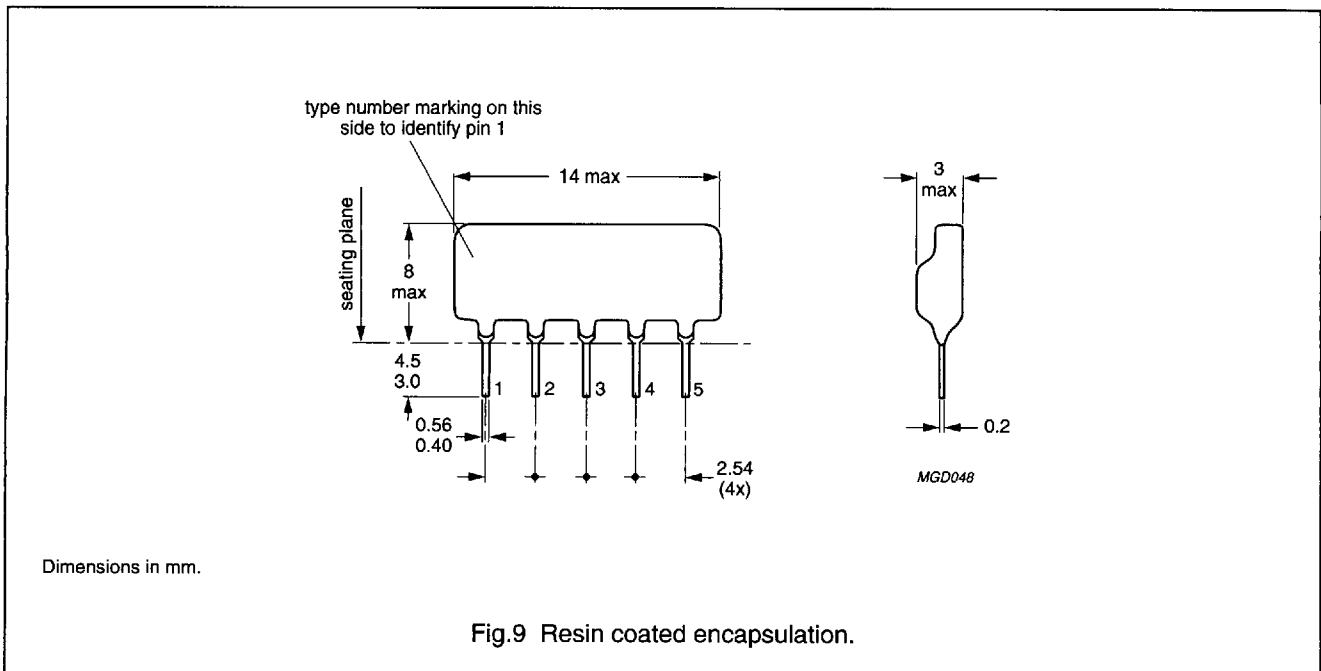

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.