


Molded, 50 Mil Pitch, Dual-In-Line Resistor Networks

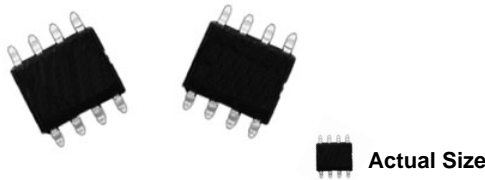

FEATURES

- Tight T.C. tracking
- Monolithic reliability
- Low noise
- Rapid Rise Time
- Low cost

The RMK series of small outline surface mount style molded package can accommodate resistor network to your particular application requirements in compact circuit integration. The resistor element is a proprietary nickel chromium film formulation on oxidized silicon.


Utilizing those networks will enable you to take advantage of parametric performances which will introduce in your circuitry high thermal and load life stability together with the added benefits of low noise and rapid rise time.

TYPICAL PERFORMANCE


	ABS	TRACKING
TCR	10	5
	ABS	RATIO
TOL	0.1	0.05

SCHEMATIC


RMKM S408




RMKM S508




RMKM S714



RMKM S914




RMKM S816


Case S08
Case S014
Case S016

For other configurations, please consult factory.

STANDARD ELECTRICAL SPECIFICATIONS		
TEST		SPECIFICATIONS
SIZES		S08, S014, S016
Resistance Range		500 ohms to 200K
TCR:	Tracking	$\pm 5 \text{ ppm}/^\circ\text{C Max.}$
	Absolute	$\pm 15 \text{ ppm}/^\circ\text{C} (-55^\circ\text{C to } \pm 125^\circ\text{C}); \pm 10 \text{ ppm}/^\circ\text{C} (0^\circ\text{C to } +70^\circ\text{C})$
Tolerance:	Ratio	0.05% to 0.5% (0.02 upon request)
	Absolute	$\pm 0.1\% \text{ to } \pm 1\%$
Power Rating:	Resistor	50mW
	Package	S08 = 250mW S014 = 500mW S016 = 500mW
Stability	ΔR Absolute	0.05%
	ΔR Ratio	0.02%
Voltage Coefficient		< 0.1ppm/Volt
Working Voltage		50V _{dc} Max.
Operating Temperature Range		-55°C to +125°C
Storage Temperature Range		-55°C to +155°C
Noise		-35dB (Typical)
Thermal EMF		0.1µV/°C
High Temp. Storage*:	Absolute	0.075%
	Ratio	0.025%
		2000 hrs. @ +125°C
		2000 hrs. @ +125°C

DIMENSIONS AND IMPRINTING in inches and millimeters

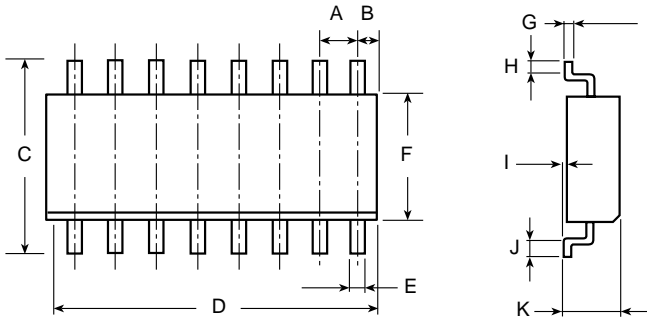


Imprinting:

VISHAY logo, series, ohmic value, tolerance, manufacturing date

DIMENSION	INCHES	MILLIMETERS
A	0.05	Pitch 1.27
B	0.025	0.63 Max.
C (S08)	0.232/0.244	5.9/6.2
C (S014)	0.232/0.244	5.9/6.2
C (S016)	0.248/0.260	6.3/6.6
D (S08)	0.187/0.195	4.75/4.95
D (S014)	0.337/0.344	8.55/8.75
D (S016)	0.386/0.394	9.8/10
E	0.014/0.018	0.35/0.45
F (S08)	0.154/0.157	3.9/4
F (S014)	0.154/0.157	3.9/4
F (S016)	0.154/0.157	3.9/4
G	0.007/0.010	0.185/0.265
H, J	0.015	0.40
I	0.004/0.007	0.1/0.2
K	0.070 Max.	1.75 Max.

MECHANICAL SPECIFICATIONS	
Mechanical Protection	Epoxy Molded Assembly
Terminal Leads	Tinned
Resistive Element	Passivated Nichrome
Unit Weight: Case S08	0.070g
Cases S014, S016	0.146g

DERATING CURVE

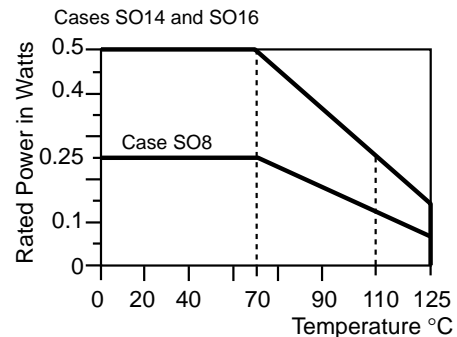

How to Order

Series	Package	Number of Resistors	Number of Pins	Ohmic Value	Tolerance/ Ratio
RMKM	S	5	08	10K ohms	B
		4	08		Abs. Tol. Ratio
		5	14		A = ±0.1% 0.05%
		7	16		B = ±0.1% 0.1%
		8			D = ±0.5% 0.1%
		9			F = ±1.0% 0.5%
					Tighter upon request