



RZW Series

Features

- 105°C, 4,000 ~ 10,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHs Compliance




Sleeve & Marking Color: Black & Golden

Specifications

Items	Performance																																
Category Temperature Range	-55°C ~ +105°C																																
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																
Leakage Current (at 20°C)	$I = 0.01CV$ or $3 (\mu A)$ whichever is greater (after 2 minutes) Where, C= rated capacitance in μF V = rated DC working voltage in V																																
Tan δ (at 120 Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> </tr> </table> <p>When the capacitance exceeds 1000μF, 0.02 shall be added every 1000μF increase.</p>	Rated Voltage	6.3	10	16	25	35	50	63	Tan δ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																
Rated Voltage	6.3	10	16	25	35	50	63																										
Tan δ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09																										
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Impedance Ratio $Z(-55^\circ C)/Z(+20^\circ C)$</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated Voltage	6.3	10	16	25	35	50	63	Impedance Ratio $Z(-55^\circ C)/Z(+20^\circ C)$	3	3	3	3	3	3	3																
Rated Voltage	6.3	10	16	25	35	50	63																										
Impedance Ratio $Z(-55^\circ C)/Z(+20^\circ C)$	3	3	3	3	3	3	3																										
Endurance	<table border="1"> <tr> <td rowspan="2">Time</td> <td>6.3 ~ 10V</td> <td>4,000 Hrs for $\phi D = 5 \sim 6.3$ mm; 6,000 Hrs for $\phi D = 8 \sim 10$ mm; 8,000 Hrs for $\phi D \geq 12.5$ mm</td> </tr> <tr> <td>16 ~ 63V</td> <td>5,000 Hrs for $\phi D = 5 \sim 6.3$ mm; 7,000 Hrs for $\phi D = 8 \sim 10$ mm; 10,000 Hrs for $\phi D \geq 12.5$ mm</td> </tr> <tr> <td>Capacitance Change</td> <td colspan="2">Within $\pm 25\%$ of initial value</td> </tr> <tr> <td>Tanδ</td> <td colspan="2">Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td colspan="2">Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 ~ 10,000 hours at 105°C.</p>	Time	6.3 ~ 10V	4,000 Hrs for $\phi D = 5 \sim 6.3$ mm; 6,000 Hrs for $\phi D = 8 \sim 10$ mm; 8,000 Hrs for $\phi D \geq 12.5$ mm	16 ~ 63V	5,000 Hrs for $\phi D = 5 \sim 6.3$ mm; 7,000 Hrs for $\phi D = 8 \sim 10$ mm; 10,000 Hrs for $\phi D \geq 12.5$ mm	Capacitance Change	Within $\pm 25\%$ of initial value		Tan δ	Less than 200% of specified value		Leakage Current	Within specified value																			
Time	6.3 ~ 10V		4,000 Hrs for $\phi D = 5 \sim 6.3$ mm; 6,000 Hrs for $\phi D = 8 \sim 10$ mm; 8,000 Hrs for $\phi D \geq 12.5$ mm																														
	16 ~ 63V	5,000 Hrs for $\phi D = 5 \sim 6.3$ mm; 7,000 Hrs for $\phi D = 8 \sim 10$ mm; 10,000 Hrs for $\phi D \geq 12.5$ mm																															
Capacitance Change	Within $\pm 25\%$ of initial value																																
Tan δ	Less than 200% of specified value																																
Leakage Current	Within specified value																																
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within $\pm 25\%$ of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>	Test Time	1,000 Hrs	Capacitance Change	Within $\pm 25\%$ of initial value	Tan δ	Less than 200% of specified value	Leakage Current	Within specified value																								
Test Time	1,000 Hrs																																
Capacitance Change	Within $\pm 25\%$ of initial value																																
Tan δ	Less than 200% of specified value																																
Leakage Current	Within specified value																																
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td></td> <td>Cap. (μF)</td> <td>120</td> <td>1k</td> <td>10k</td> <td>100k up</td> </tr> <tr> <td rowspan="5">Freq. (Hz)</td> <td>under ~ 33</td> <td>0.42</td> <td>0.70</td> <td>0.90</td> <td>1.0</td> </tr> <tr> <td>39 ~ 270</td> <td>0.50</td> <td>0.73</td> <td>0.92</td> <td>1.0</td> </tr> <tr> <td>330 ~ 680</td> <td>0.55</td> <td>0.77</td> <td>0.94</td> <td>1.0</td> </tr> <tr> <td>820 ~ 1,800</td> <td>0.6</td> <td>0.80</td> <td>0.96</td> <td>1.0</td> </tr> <tr> <td>2,200 ~ 18,000</td> <td>0.7</td> <td>0.85</td> <td>0.98</td> <td>1.0</td> </tr> </table>		Cap. (μF)	120	1k	10k	100k up	Freq. (Hz)	under ~ 33	0.42	0.70	0.90	1.0	39 ~ 270	0.50	0.73	0.92	1.0	330 ~ 680	0.55	0.77	0.94	1.0	820 ~ 1,800	0.6	0.80	0.96	1.0	2,200 ~ 18,000	0.7	0.85	0.98	1.0
	Cap. (μF)	120	1k	10k	100k up																												
Freq. (Hz)	under ~ 33	0.42	0.70	0.90	1.0																												
	39 ~ 270	0.50	0.73	0.92	1.0																												
	330 ~ 680	0.55	0.77	0.94	1.0																												
	820 ~ 1,800	0.6	0.80	0.96	1.0																												
	2,200 ~ 18,000	0.7	0.85	0.98	1.0																												


Diagram of Dimensions

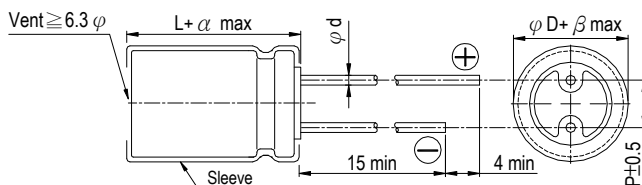

Lead Spacing and Diameter Unit: mm

ϕD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5		0.6		0.8		
α	L < 20: 1.5, L \geq 20: 2.0						
β	0.5						

The case size of 12.5×16, 16×16, 16×20, 18×16, 18×20 and 18×25 are suitable for below diagram:

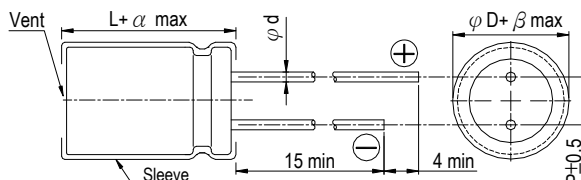

Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz, 105°C

Dimension & Permissible Ripple Current

V. DC Contents μF	6.3V (0J)				10V (1A)				16V (1C)				25V (1E)			
	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz	$\phi D \times L$	Impedance (Ω , Max/100kHz)		Ripple Current (mA/rms, 105°C) 100k Hz
		20°C	-10°C			20°C	-10°C			20°C	-10°C			20°C	-10°C	
47													5×11	0.58	1.16	210
56									5×11	0.58	1.16	210				
100					5×11	0.58	1.16	210					6.3×11	0.22	0.44	340
120									6.3×11	0.22	0.44	340				
150	5×11	0.58	1.16	210												
220					6.3×11	0.22	0.44	340	8×11.5	0.11	0.22	640	8×11.5	0.11	0.22	640
330	6.3×11	0.22	0.44	340					8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865
470					8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210
680	8×11.5	0.11	0.22	640	8×15 10×12.5	0.083 0.080	0.166 0.160	840 865	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450
820	10×12.5	0.080	0.16	865									10×25	0.042	0.084	1,650
1,000	8×15	0.087	0.174	840	8×20 10×16	0.064 0.060	0.128 0.120	1,050 1,210	10×20 12.5×16	0.046 0.049	0.092 0.098	1,400 1,450	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940
1,200	8×20 10×16	0.069 0.060	0.128 0.120	1,050 1,210	10×20	0.046	0.092	1,400	10×25	0.042	0.084	1,650	18×16	0.043	0.086	2,210
1500	10×20	0.046	0.092	1,400	10×25 12.5×16	0.042 0.049	0.084 0.090	1,650 1,450	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×25	0.027	0.054	2,230
1,800	12.5×16	0.045	0.090	1,450									12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530
2,200	10×25	0.042	0.084	1,650	10×30 12.5×20 16×16	0.031 0.035 0.042	0.062 0.070 0.084	1,910 1,900 1,940	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×35 18×20	0.020 0.026	0.040 0.052	2,880 2,860
2,700	10×30 16×16	0.031 0.042	0.062 0.084	1,910 1,940	18×16	0.043	0.086	2,210	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	12.5×40 16×25	0.017 0.021	0.034 0.042	3,350 2,930
3,300	12.5×20	0.035	0.070	1,900	12.5×25	0.027	0.054	2,230	12.5×35	0.020	0.040	2,880	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140
3,900	12.5×25 18×16	0.027 0.043	0.054 0.086	2,230 2,210	12.5×30 16×20	0.024 0.027	0.048 0.054	2,650 2,530	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170
4,700	12.5×30	0.024	0.048	2,650	12.5×35	0.020	0.040	2,880	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220
5,600	12.5×35 16×20	0.020 0.027	0.040 0.054	2,880 2,530	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×35.5 18×31.5	0.015 0.015	0.030 0.03	3,610 4,170	18×40	0.012	0.024	4,280
6,800	12.5×40 16×25 18×20	0.017 0.021 0.026	0.034 0.042 0.052	3,350 2,930 2,860	16×31.5 18×25	0.017 0.019	0.034 0.038	3,450 3,140	16×40	0.013	0.026	4,080				
8,200	16×31.5	0.017	0.034	3,450	16×35.5 18×31.5	0.015 0.015	0.030 0.030	3,610 4,170	18×35.5	0.014	0.02	4,220				
10,000	16×35.5 18×25	0.015 0.019	0.030 0.038	3,610 3,140	16×40 18×35.5	0.013 0.014	0.026 0.028	4,080 4,220	18×40	0.012	0.024	4,280				
12,000	16×40 18×31.5	0.013 0.015	0.026 0.030	4,080 4,170	18×40	0.012	0.024	4,280								
15,000	18×35.5	0.014	0.028	4,220												
18,000	18×40	0.012	0.024	4,280												

