

HITACHI

KAOHSIUNG HITACHI ELECTRONICS CO.,LTD

FOR MESSRS : _____

DATE : Jan.18,2011

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

TX09D70VM1CCA

CONTENTS

| No. | ITEM | SHEET No. | PAGE |
|-----|----------------------------|-----------------------------|------------|
| 1 | COVER | 7B64PS 2701-TX09D70VM1CCA-7 | 1-1/1 |
| 2 | RECORD OF REVISION | 7B64PS 2702-TX09D70VM1CCA-7 | 2-1/2~2/2 |
| 3 | GENERAL DATA | 7B64PS 2703-TX09D70VM1CCA-7 | 3-1/1 |
| 4 | ABSOLUTE MAXIMUM RATINGS | 7B64PS 2704-TX09D70VM1CCA-7 | 4-1/2~2/2 |
| 5 | ELECTRICAL CHARACTERISTICS | 7B64PS 2705-TX09D70VM1CCA-7 | 5-1/2~2/2 |
| 6 | OPTICAL CHARACTERISTICS | 7B64PS 2706-TX09D70VM1CCA-7 | 6-1/2~2/2 |
| 7 | BLOCK DIAGRAM | 7B64PS 2707-TX09D70VM1CCA-7 | 7-1/1 |
| 8 | INTERFACE TIMING CHART | 7B64PS 2708-TX09D70VM1CCA-7 | 8-1/6~6/6 |
| 9 | OUTLINE DIMENSIONS | 7B64PS 2709-TX09D70VM1CCA-7 | 9-1/1 |
| 10 | APPEARANCE STANDARD | 7B64PS 2710-TX09D70VM1CCA-7 | 10-1/4~4/4 |
| 11 | PRECAUTION IN DESIGN | 7B64PS 2711-TX09D70VM1CCA-7 | 11-1/3~3/3 |
| 12 | DESIGNATION OF LOT MARK | 7B64PS 2712-TX09D70VM1CCA-7 | 12-1/1 |
| 13 | PRECAUTION FOR USE | 7B64PS 2713-TX09D70VM1CCA-7 | 13-1/1 |

ACCEPTED BY : _____

PROPOSED BY : Kentken

RECORD OF REVISION

| DATE | SHEET No. | SUMMARY | | | | | | | | | | | | | | | | | | |
|---|---|--|-----------------|-----------|-----------|------|-----------------|-------------------|-------------------|-----------------------|-----------------------|-----------------|------|---------------------|---------------------|----|---|----|----|----|
| Oct.28,'05 | 7B64PS 2704-TX09D70VM1CCA-2 PAGE 4-1/2 | 4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS OF LCD Revised | | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;"></th> <th style="width: 50%;">ITEM</th> <th style="width: 20%;">SYMBOL</th> <th style="width: 20%;">MAX.</th> </tr> </thead> <tbody> <tr> <td rowspan="2" style="text-align: center; vertical-align: middle;">LED</td> <td>Forward Current</td> <td>IF</td> <td>25</td> </tr> <tr> <td>Pulse Forward Current</td> <td>I_{FP}</td> <td>80</td> </tr> </tbody> </table> | | ITEM | SYMBOL | MAX. | LED | Forward Current | IF | 25 | Pulse Forward Current | I _{FP} | 80 | | | | | | | |
| | | | ITEM | SYMBOL | MAX. | | | | | | | | | | | | | | | |
| | | LED | Forward Current | IF | 25 | | | | | | | | | | | | | | | |
| Pulse Forward Current | I _{FP} | | 80 | | | | | | | | | | | | | | | | | |
| ↓ | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;"></th> <th style="width: 50%;">ITEM</th> <th style="width: 20%;">SYMBOL</th> <th style="width: 20%;">MAX.</th> </tr> </thead> <tbody> <tr> <td rowspan="2" style="text-align: center; vertical-align: middle;">LED</td> <td>Forward Current</td> <td>IF</td> <td>35</td> </tr> <tr> <td>Pulse Forward Current</td> <td>I_{FP}</td> <td>100</td> </tr> </tbody> </table> | | ITEM | SYMBOL | MAX. | LED | Forward Current | IF | 35 | Pulse Forward Current | I _{FP} | 100 | | | | | | | | |
| | ITEM | SYMBOL | MAX. | | | | | | | | | | | | | | | | | |
| LED | Forward Current | IF | 35 | | | | | | | | | | | | | | | | | |
| | Pulse Forward Current | I _{FP} | 100 | | | | | | | | | | | | | | | | | |
| Note 4 : | | | | | | | | | | | | | | | | | | | | |
| Note 5 : | | <p>IFP Conditions : pulse width ≤ 10ms and Duty ≤ 1/10</p> | | | | | | | | | | | | | | | | | | |
| 7B64PS 2705-TX09D70VM1CCA-2 PAGE 5-1/2 | 5.2 ELECTRICAL CHARACTERISTICS OF BACK LIGHT Revised | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">ITEM</th> <th style="width: 15%;">SYMBOL</th> <th style="width: 15%;">CONDITION</th> <th style="width: 10%;">MAX.</th> <th style="width: 10%;">TYP.</th> <th style="width: 10%;">MAX.</th> </tr> </thead> <tbody> <tr> <td>LED Input Voltage</td> <td>VF</td> <td>IF=20mA</td> <td>-</td> <td>3.75</td> <td>4.2</td> </tr> <tr> <td>LED Forward Current</td> <td>IF</td> <td>-</td> <td>-</td> <td>20</td> <td>20</td> </tr> </tbody> </table> | ITEM | SYMBOL | CONDITION | MAX. | TYP. | MAX. | LED Input Voltage | VF | IF=20mA | - | 3.75 | 4.2 | LED Forward Current | IF | - | - | 20 | 20 |
| | | ITEM | SYMBOL | CONDITION | MAX. | TYP. | MAX. | | | | | | | | | | | | | |
| LED Input Voltage | VF | IF=20mA | - | 3.75 | 4.2 | | | | | | | | | | | | | | | |
| LED Forward Current | IF | - | - | 20 | 20 | | | | | | | | | | | | | | | |
| ↓ | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">ITEM</th> <th style="width: 15%;">SYMBOL</th> <th style="width: 15%;">CONDITION</th> <th style="width: 10%;">MAX.</th> <th style="width: 10%;">TYP.</th> <th style="width: 10%;">MAX.</th> </tr> </thead> <tbody> <tr> <td>LED Input Voltage</td> <td>VF</td> <td>IF=20mA</td> <td>-</td> <td>3.2</td> <td>3.5</td> </tr> <tr> <td>LED Forward Current</td> <td>IF</td> <td>-</td> <td>-</td> <td>20</td> <td>25</td> </tr> </tbody> </table> | ITEM | SYMBOL | CONDITION | MAX. | TYP. | MAX. | LED Input Voltage | VF | IF=20mA | - | 3.2 | 3.5 | LED Forward Current | IF | - | - | 20 | 25 | |
| ITEM | SYMBOL | CONDITION | MAX. | TYP. | MAX. | | | | | | | | | | | | | | | |
| LED Input Voltage | VF | IF=20mA | - | 3.2 | 3.5 | | | | | | | | | | | | | | | |
| LED Forward Current | IF | - | - | 20 | 25 | | | | | | | | | | | | | | | |
| 7B64PS 2705-TX09D70VM1CCA-2 PAGE 6-1/6 | 6.1 OPTICAL CHARACTERISTICS OF LCD Revised the color tone | | | | | | | | | | | | | | | | | | | |
| 7B64PS 2705-TX09D70VM1CCA-2 PAGE 8-6/6 | 8.5 INTERNAL PIN CONNECTION Revised the function of PIN35 Added Note1 | | | | | | | | | | | | | | | | | | | |

RECORD OF REVISION

| DATE | SHEET No. | SUMMARY | | | | | | | | | | | | | | | | | | | | |
|-----------------------|---|--|---------|------|------|-----|--------------------|---------|--|-----|-----------------------|-----|---|-----|---------------------|-----|--|-----|-----------------------|----|--|----|
| Jan.27,'06 | 7B64PS 2705- TX09D70VM1CCA-3 PAGE 8-3/6 | 8.3 POWER ON/OFF SEQUENCE Added the waveform of PCI signal | | | | | | | | | | | | | | | | | | | | |
| | 7B64PS 2705- TX09D70VM1CCA-3 PAGE 8-6/6 | 8.5 INTERNAL PIN CONNECTION Revised the function of PIN35 Revised Note1 | | | | | | | | | | | | | | | | | | | | |
| Feb.17,'06 | 7B64PS 2705- TX09D70VM1CCA-4 PAGE 8-1/6 | 8.1 INTERFACE TIMING Revised | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 15%;">MIN</th> <th style="width: 15%;"></th> <th style="width: 10%;">MIN</th> </tr> </thead> <tbody> <tr> <td>Horizontal Total</td> <td style="text-align: center;">258</td> <td></td> <td style="text-align: center;">265</td> </tr> <tr> <td>Horizontal Sync Start</td> <td style="text-align: center;">246</td> <td style="text-align: center;">→</td> <td style="text-align: center;">244</td> </tr> <tr> <td>Horizontal Sync End</td> <td style="text-align: center;">250</td> <td></td> <td style="text-align: center;">248</td> </tr> <tr> <td>Horizontal Blank Time</td> <td style="text-align: center;">18</td> <td></td> <td style="text-align: center;">25</td> </tr> </tbody> </table> | | MIN | | MIN | Horizontal Total | 258 | | 265 | Horizontal Sync Start | 246 | → | 244 | Horizontal Sync End | 250 | | 248 | Horizontal Blank Time | 18 | | 25 |
| | | | MIN | | MIN | | | | | | | | | | | | | | | | | |
| | | Horizontal Total | 258 | | 265 | | | | | | | | | | | | | | | | | |
| | | Horizontal Sync Start | 246 | → | 244 | | | | | | | | | | | | | | | | | |
| Horizontal Sync End | 250 | | 248 | | | | | | | | | | | | | | | | | | | |
| Horizontal Blank Time | 18 | | 25 | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |
| May.13,'08 | 7B64PS 2712- TX09D70VM1CCA-5 PAGE 12-1/1 | 12.1 LOT MARK Changed : 5 digits for production number ↓ 6 digits for production number | | | | | | | | | | | | | | | | | | | | |
| | | 12.2 Location of lot mark Lot mark change: to Barcode label | | | | | | | | | | | | | | | | | | | | |
| Sep.23,'08 | 7B64PS 2708- TX09D70VM1CCA – 6 PAGE 8-6/6 | 8.5 INTERNAL PIN CONNECTION Revised CN1 tyco:1770046-3 (Suitable FPC : t0.3±0.03mm , 0.5±0.03mm pitch) ↓ CN1 :FA5S040HP1R3000 (Suitable FPC : t0.3±0.03mm , 0.5±0.03mm pitch) | | | | | | | | | | | | | | | | | | | | |
| | 7B64PS 2712 – TX09D70VM1CCA – 6 PAGE 12 - 1/1 | 12. DESIGNATION OF LOT MARK Revised REV.A to REV.B | | | | | | | | | | | | | | | | | | | | |
| Jan.18,'11 | 7B64PS 2712 – TX09D70VM1CCA-7 Page 12 – 1/1 | 12.3 REVISION (REV.) CONTROL Added | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">REV No.</th> <th style="width: 50%;">ITEM</th> <th style="width: 30%;">NOTE</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">C</td> <td style="text-align: center;">Connectors Changed</td> <td style="text-align: center;">PCN0804</td> </tr> </tbody> </table> | REV No. | ITEM | NOTE | C | Connectors Changed | PCN0804 | | | | | | | | | | | | | | |
| REV No. | ITEM | NOTE | | | | | | | | | | | | | | | | | | | | |
| C | Connectors Changed | PCN0804 | | | | | | | | | | | | | | | | | | | | |

3.GENERAL DATA

The specifications are applied to the following TFT-LCD (Transmissive with micro reflectance) module with Back-light unit.

- | | |
|-----------------------------|--|
| (1) Part Name | TX09D70VM1CCA |
| (2) Module Dimensions | 64.0(W)mm x 86.0(H)mm x 8.05(D)mm typ. |
| (3) Effective Display Area | 53.64(W)mm x 71.52(H)mm (Diagonal:9cm) |
| (4) Dot Pitch | 0.0745mm x 3(R,G,B)(W) x 0.2235(H)mm |
| (5) Resolution | 240 x 3(R,G,B)(W) x 320 (H) dots |
| (6) Color Pixel Arrangement | R,G,B Vertical Stripe |
| (7) LCD Type | Transmissive Color TFT LCD (Normally White) |
| (8) Display Type | Active Matrix |
| (9) Number of Colors | 262 ^K Colors (R,G,B 6 Bit Digital each) |
| (10) Backlight | Light Emitting Diode (LED) x 6 |
| (11) Weight | (48)g |
| (12) Interface | 40 pin C-MOS |
| (13) Power Supply Voltage | 3.3V only (Including Timing Controller ,LCD and LED Power Unit) |
| (14) Viewing Direction | 6 O'clock (The direction it's hard to be discolored) |
| (15) Touch Panel | Resistance type. The surface is anti-glare. |

4. ABSOLUTE MAXIMUM RATINGS

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

VSS=0V

| ITEM | | SYMBOL | MIN. | MAX. | UNIT | COMMENT |
|------------------------|-----------------------|--------|------|---------|------|------------|
| Power Supply for Logic | | VDD | -0.3 | 4.0 | V | |
| Input Voltage | | VI | -0.3 | VDD+0.3 | | (Note 1) |
| Input Current | | II | 0 | 1 | A | |
| Static Electricity | | VESD0 | - | ±100 | V | (Note 2,3) |
| | | VESD1 | - | (8) | kV | (Note 2,4) |
| LED | Forward Current | IF | - | 35 | mA | (Note 5) |
| | Pulse Forward Current | IFP | - | 100 | mA | (Note 6) |
| | Reverse Voltage | VR | - | 5 | V | |


Note 1 : DTMG, DCLK, RD0~RD5, GD0~GD5, BD0~BD5.

Note 2 : 200pF-0Ω 25°C -70%RH


Note 3 : Interface Pin Connector.

Note 4 : The surface of metal bezel and LCD panel.

Note 5 :

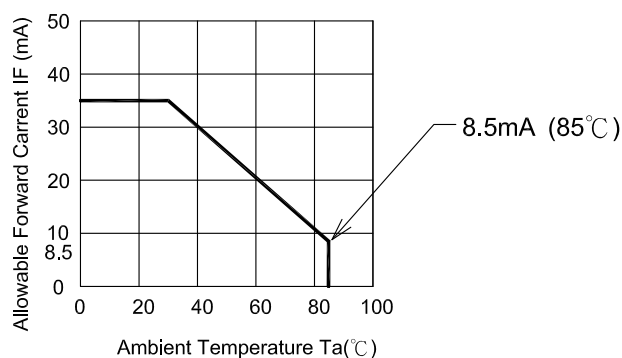

Note 6 : IFP Conditions : pulse width ≤ 10 ms and Duty $\leq 1/10$

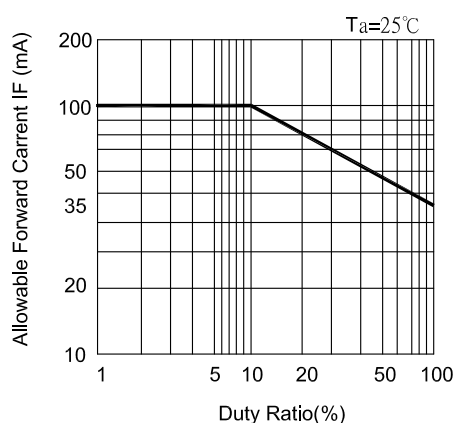

4.2 ELECTRICAL ABSOLUTE MAXIMUM RATINGS OF TOUCH PANEL

| ITEM | SPECIFICATION | UNIT | CONDITION | REMARKS |
|-------------------|---------------|------|-----------|----------|
| Supply Voltage | 7.0 | V | DC | |
| Endurance Voltage | 25 | V | DC | (Note 1) |

Note 1 : Waiting 1 minute.

4.3 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

| ITEM | OPERATING | | STORAGE | | REMARKS |
|---------------------|----------------|---------------------------------|----------------|---------------------------------|----------------------|
| | Min. | Max. | Min. | Max. | |
| Ambient Temperature | -20°C | 70°C | -30°C | 80°C | (Note 2,3,6,7,9,10) |
| Humidity | (Note 1) | | (Note 1) | | Without condensation |
| Vibration | - | 2.45m/s ² (0.25G) | - | 11.76m/s ² (1.2G) | (Note 4,5) |
| Shock | - | 29.4m/s ² (3G) | - | 490m/s ² (50G) | (Note 5,8) |
| Corrosive Gas | Not Acceptable | | Not Acceptable | | |

Note 1 : $T_a \leq 40^\circ\text{C}$: 85%RH max.

$T_a > 40^\circ\text{C}$: Absolute humidity must be lower than the humidity of 85%RH at 40°C .

Note 2 : For storage condition T_a at $-30^\circ\text{C} < 48\text{h}$, at $80^\circ\text{C} < 100\text{h}$.

For operating condition T_a at $-20^\circ\text{C} < 100\text{h}$

Note 3 : Background color changes slightly depending on ambient temperature.

This phenomenon is reversible.

Note 4 : 5Hz~100Hz(Except resonance frequency)

Note 5 : This LCM will resume normal operation after finishing the test.

Note 6 : The response time will be slower as low temperature.

Note 7 : Only operation is guaranteed at operating temperature. Contrast, response time, another display quality are evaluated at 25°C .

Note 8 : Pulse Width : 10ms

Note 9 : This is panel surface temperature , not ambient temperature.

Note 10 : If LED is driven by high current, the life time of LED will be reduced, also high temperature and high humidity.

5. ELECTRICAL CHARACTERISTICS

5.1 ELECTRICAL CHARACTERISTICS OF LCD

Ta=25°C, VSS=0V

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT |
|-------------------------------------|--------|--------------|-------|------|-------|------|
| Power Supply Voltage | VDD | - | 3.0 | 3.3 | 3.6 | V |
| Input voltage for logic (note 1) | VI | "H" level | 1.7 | - | VDD | V |
| | | "L" level | VSS | - | 0.7 | |
| Power Supply Current (note 2) | IDD | VDD-VSS=3.3V | - | 200 | - | mA |
| Vsync Frequency | fV | - | 52 | 60 | 68 | Hz |
| Hsync Frequency | fH | - | 10.92 | 19.5 | 22.12 | kHz |
| DCLK Frequency | fCLK | - | 4.62 | 5.33 | 6.04 | MHz |

Note 1 : DTMG, DCLK, RD0~RD5, GD0~GD5, BD0~BD5.

Note 2 : fV=60Hz, Ta=25°C, Pattern used as display pattern : All Black.


Note 3 : Need to made sure of flickering and rippling of display when setting the frame frequency in your set.

5.2 ELECTRICAL CHARACTERISTICS OF BACK LIGHT

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | REMARKS |
|---------------------|--------|--------------|------|------|------|------|------------|
| LED Input Voltage | VFB | IF=20mA | - | 3.2 | 3.5 | V | LED / Part |
| LED Forward Current | IF | - | - | 20 | 25 | mA | LED / Part |
| LED Reverse Current | IR | VR=5V | - | - | 50 | μA | LED / Part |
| LED Current Control | Vctrl | VDD-VSS=3.3V | 0 | 1.8 | 4.0 | V | (Note 1) |

Note 1 : LED current depend on following conditions .

LED current is calculated by Vctrl and VFB when VFB is controlled by Vctrl.

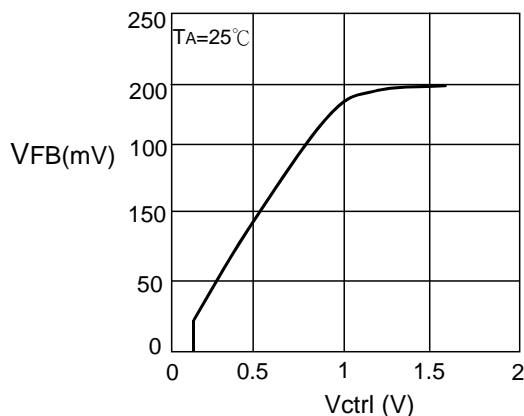

$$I_{LED} = \frac{V_{FB}}{10} : \text{When } V_{ctrl} > 1.8 \text{ V}$$

$$I_{LED} = \frac{V_{ctrl}}{50} : \text{When } V_{ctrl} < 1 \text{ V.}$$


5.3 ELECTRICAL CHARACTERISTICS OF TOUCH PANEL

| ITEM | | SPECIFICATION | UNIT |
|-------------------------------|---------|---------------|------|
| Resistance between Terminal | xR - xL | 200 - 650 | ohm |
| | yU - yL | 250 - 500 | ohm |
| Insulance Resistance (Note 1) | x - y | 10M min. | ohm |
| Linearity (Note 2,3) | x | 1.5 max. | % |
| | y | 1.5 max. | % |
| Chattering | | 10 max. | ms |

Note 1 : Operating Voltage 25V DC.

Note 2 : Test Condition.

(a) Y axis linearity testing method (with tip radius 0.8, polaycetal pen). $V_{xL-xR}=5V$, $V_{OUT}=V_{yU}$.

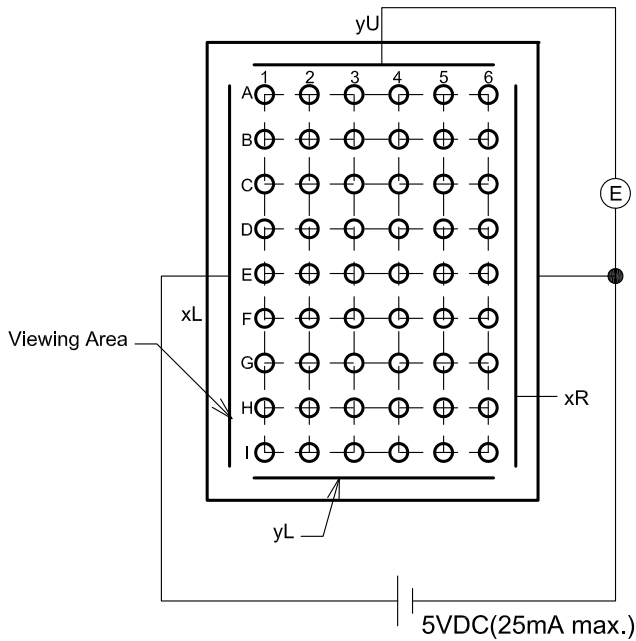


(b) X axis linearity method $V_{yU-yL}=5V$, $V_{OUT}=V_{xL}$.


Note 3 : Calculation

(a) Y axis linearity

$$\text{Linearity} = \frac{\Delta E \text{ max.}}{EA1 - EA6} \times 100(\%)$$

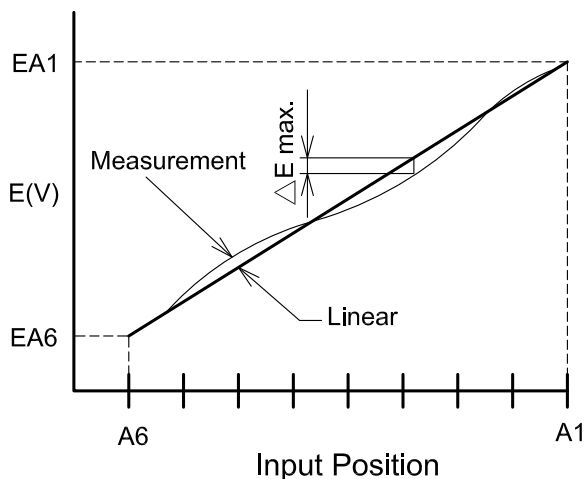

Note (4) Pen Force Area

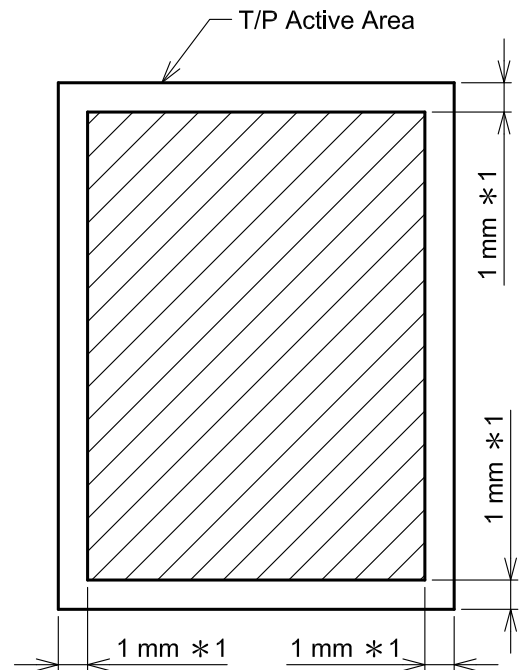

5.4 MECHANICAL CHARACTERISTICS OF TOUCH PANEL

| ITEM | SPECIFICATION | UNIT | REMARKS |
|--------------------|---------------|------|-------------------------------|
| Pen Input Pressure | 0.1 - 1.3 | N | R0.8mm Polyacetal pen Note(4) |
| Surface Hardness | 3H min. | - | JIS K 5400 |

6. OPTICAL CHARACTERISTICS

6.1 OPTICAL CHARACTERISTICS OF LCD (BACK LIGHT ON)

Ta=25°C

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | NOTE | |
|-------------------------------|-------------|-------------------------------|-------------------------------|------|------|-------------------|-------------|-----|
| Brightness | B | $\phi=0^\circ \theta=0^\circ$ | - | 320 | - | cd/m ² | (1) | |
| Uniformity | - | $\phi=0^\circ \theta=0^\circ$ | 70 | - | - | % | (2),(3),(4) | |
| Viewing Angle | θx | $\phi=0^\circ, K \geq 5.0$ | - | 70 | - | deg | (5),(6) | |
| | $\theta x'$ | $\phi=180^\circ, K \geq 5.0$ | - | 70 | - | | | |
| | θy | $\phi=90^\circ, K \geq 5.0$ | - | 80 | - | | | |
| | $\theta y'$ | $\phi=270^\circ, K \geq 5.0$ | - | 60 | - | | | |
| Contrast Ratio | K | $\phi=0^\circ \theta=0^\circ$ | 180 | 300 | - | - | (4) | |
| Response Time (rise-fall) | tr+tf | $\phi=0^\circ \theta=0^\circ$ | - | (30) | - | ms | (8) | |
| Color Tone (Primary Color) | Red | x | $\phi=0^\circ \theta=0^\circ$ | 0.55 | 0.60 | 0.65 | - | (4) |
| | | y | | 0.29 | 0.34 | 0.39 | - | |
| | Green | x | | 0.28 | 0.33 | 0.38 | - | |
| | | y | | 0.54 | 0.59 | 0.64 | - | |
| | Blue | x | | 0.09 | 0.14 | 0.19 | - | |
| | | y | | 0.07 | 0.12 | 0.17 | - | |
| | White | x | | 0.27 | 0.32 | 0.37 | - | |
| | | y | | 0.29 | 0.34 | 0.39 | - | |

(Measurement condition : HITACHI standard)

Note 1 : Active area center

Note (4)~(7) : See page 6-2/2

Note 2 : Driving Condition

Display Pattern : White Raster


LED Current : 20mA / Part

Measurement of the following


5 places on the display.

Note 3 : Definition of the brightness uniformity


$$\left(\frac{\text{Min. brightness}}{\text{Max. brightness}} \right) \times 100$$

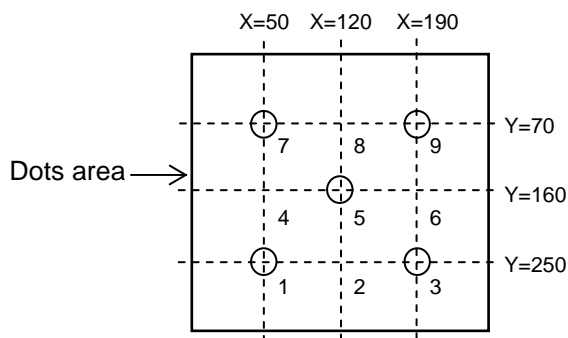


Note 4 : Measurement Condition

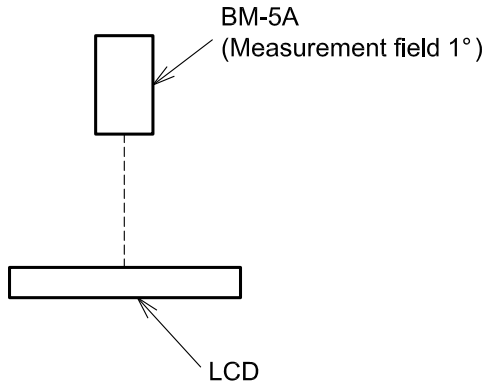

Note 5 : Definition of θ and ϕ
(Normal) Viewing direction

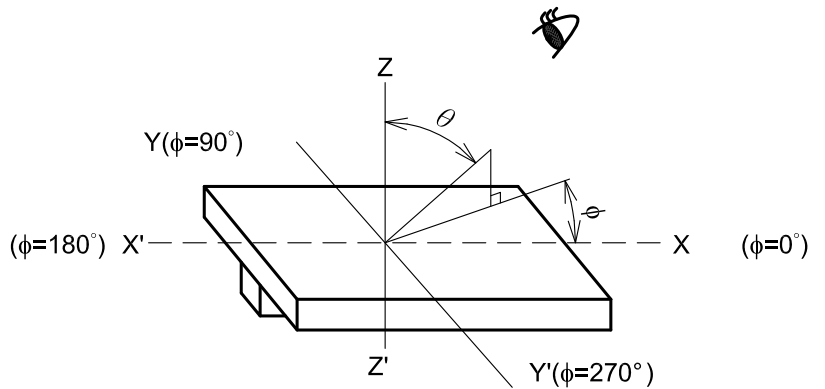



Note 6 : Definition of Viewing angle

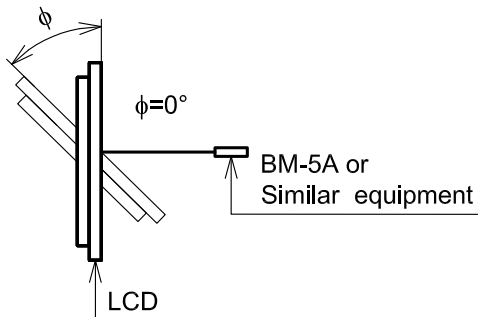


Note 7 : Definition of contrast "K"

$$K = \frac{\text{White Brightness}}{\text{Black Brightness}}$$

Note 8 : Definition optical response time

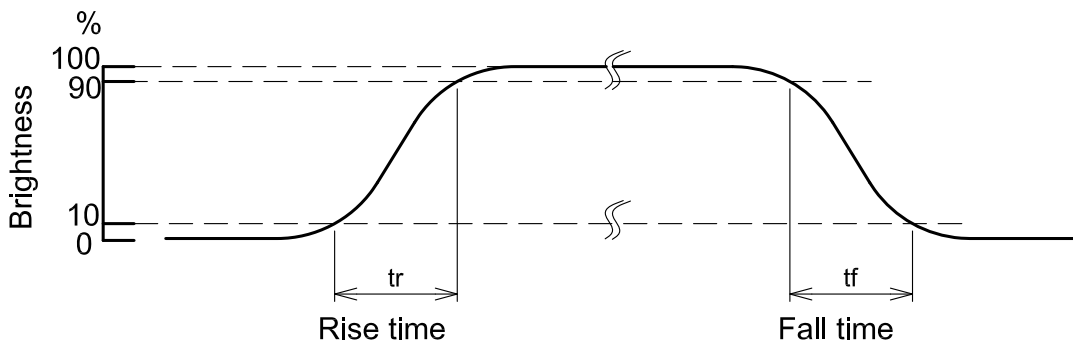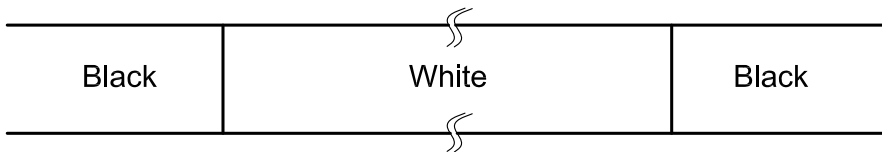

7.BLOCK DIAGRAM

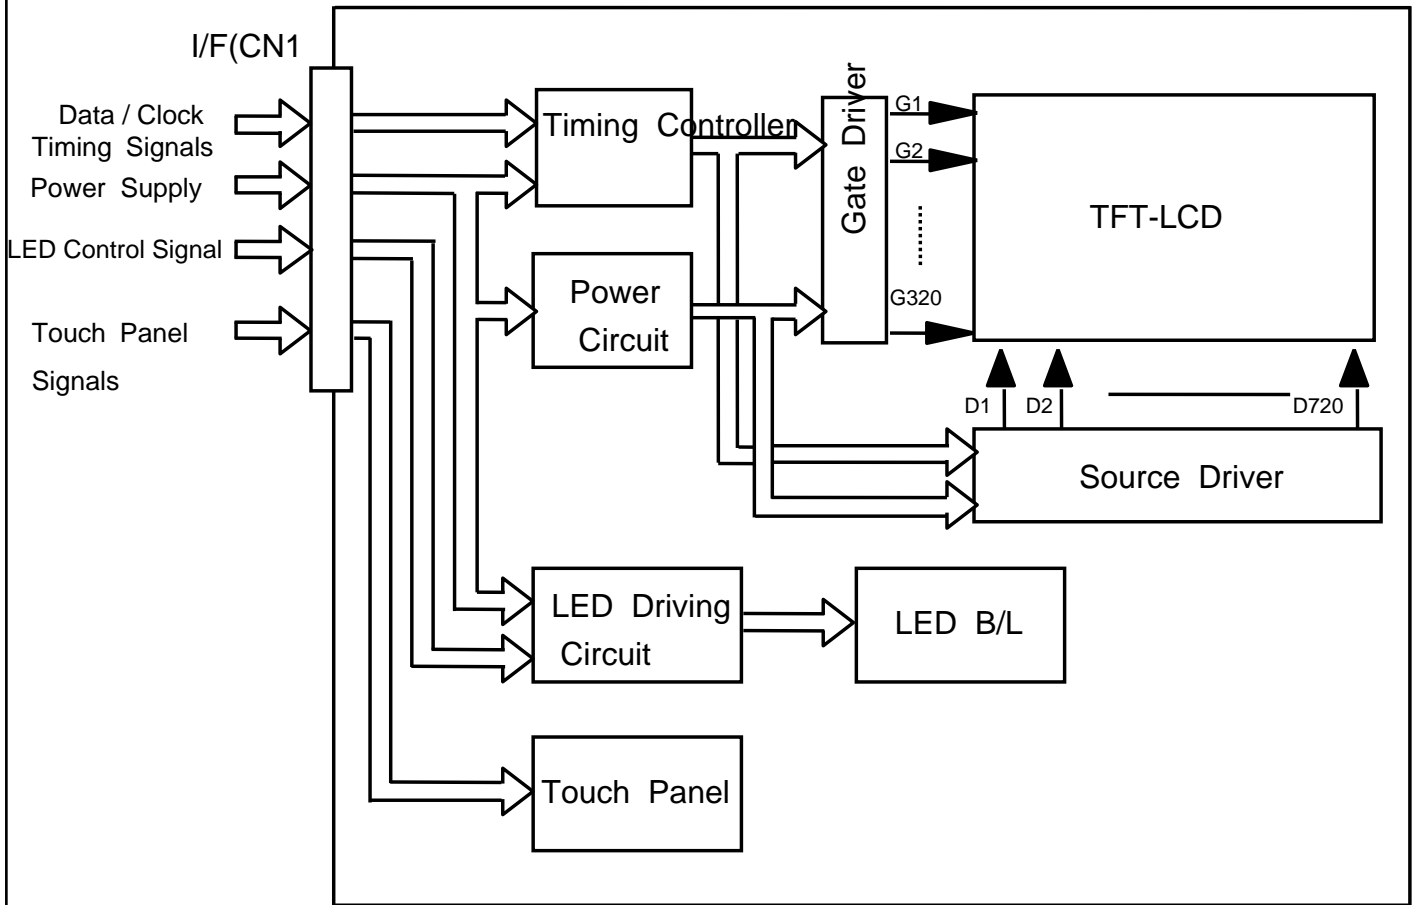

8. INTERFACE TIMING

8.1 INTERFACE TIMING

| | MIN. | TYP. | MAX. | UNIT | SYMBOL |
|------------------------|------|------|------|-------------|--------|
| Vertical Total | - | 327 | - | Line | T0 |
| Vertical Sync Width | 1 | 1 | - | Line | T1 |
| Vertical Sync Start | - | 322 | - | Line | T2 |
| Vertical Sync End | - | 323 | - | Line | T3 |
| Vertical Blank Time | 5 | 7 | - | Line | T4 |
| Vertical Display End | - | 320 | - | Line | T5 |
| Horizontal Total | 265 | 273 | 509 | Pixel Clock | T6 |
| Horizontal Sync Width | 4 | 5 | 10 | Pixel Clock | T7 |
| Horizontal Sync Start | 244 | 251 | 307 | Pixel Clock | T8 |
| Horizontal Sync End | 248 | 256 | 317 | Pixel Clock | T9 |
| Horizontal Blank Time | 25 | 33 | 269 | Pixel Clock | T10 |
| Horizontal Display End | - | 240 | - | Pixel Clock | T11 |

Note : Vertical Total should be set to odd.

8.2 TIMING CHART

(Data is latched negative edge trigger of DCLK)


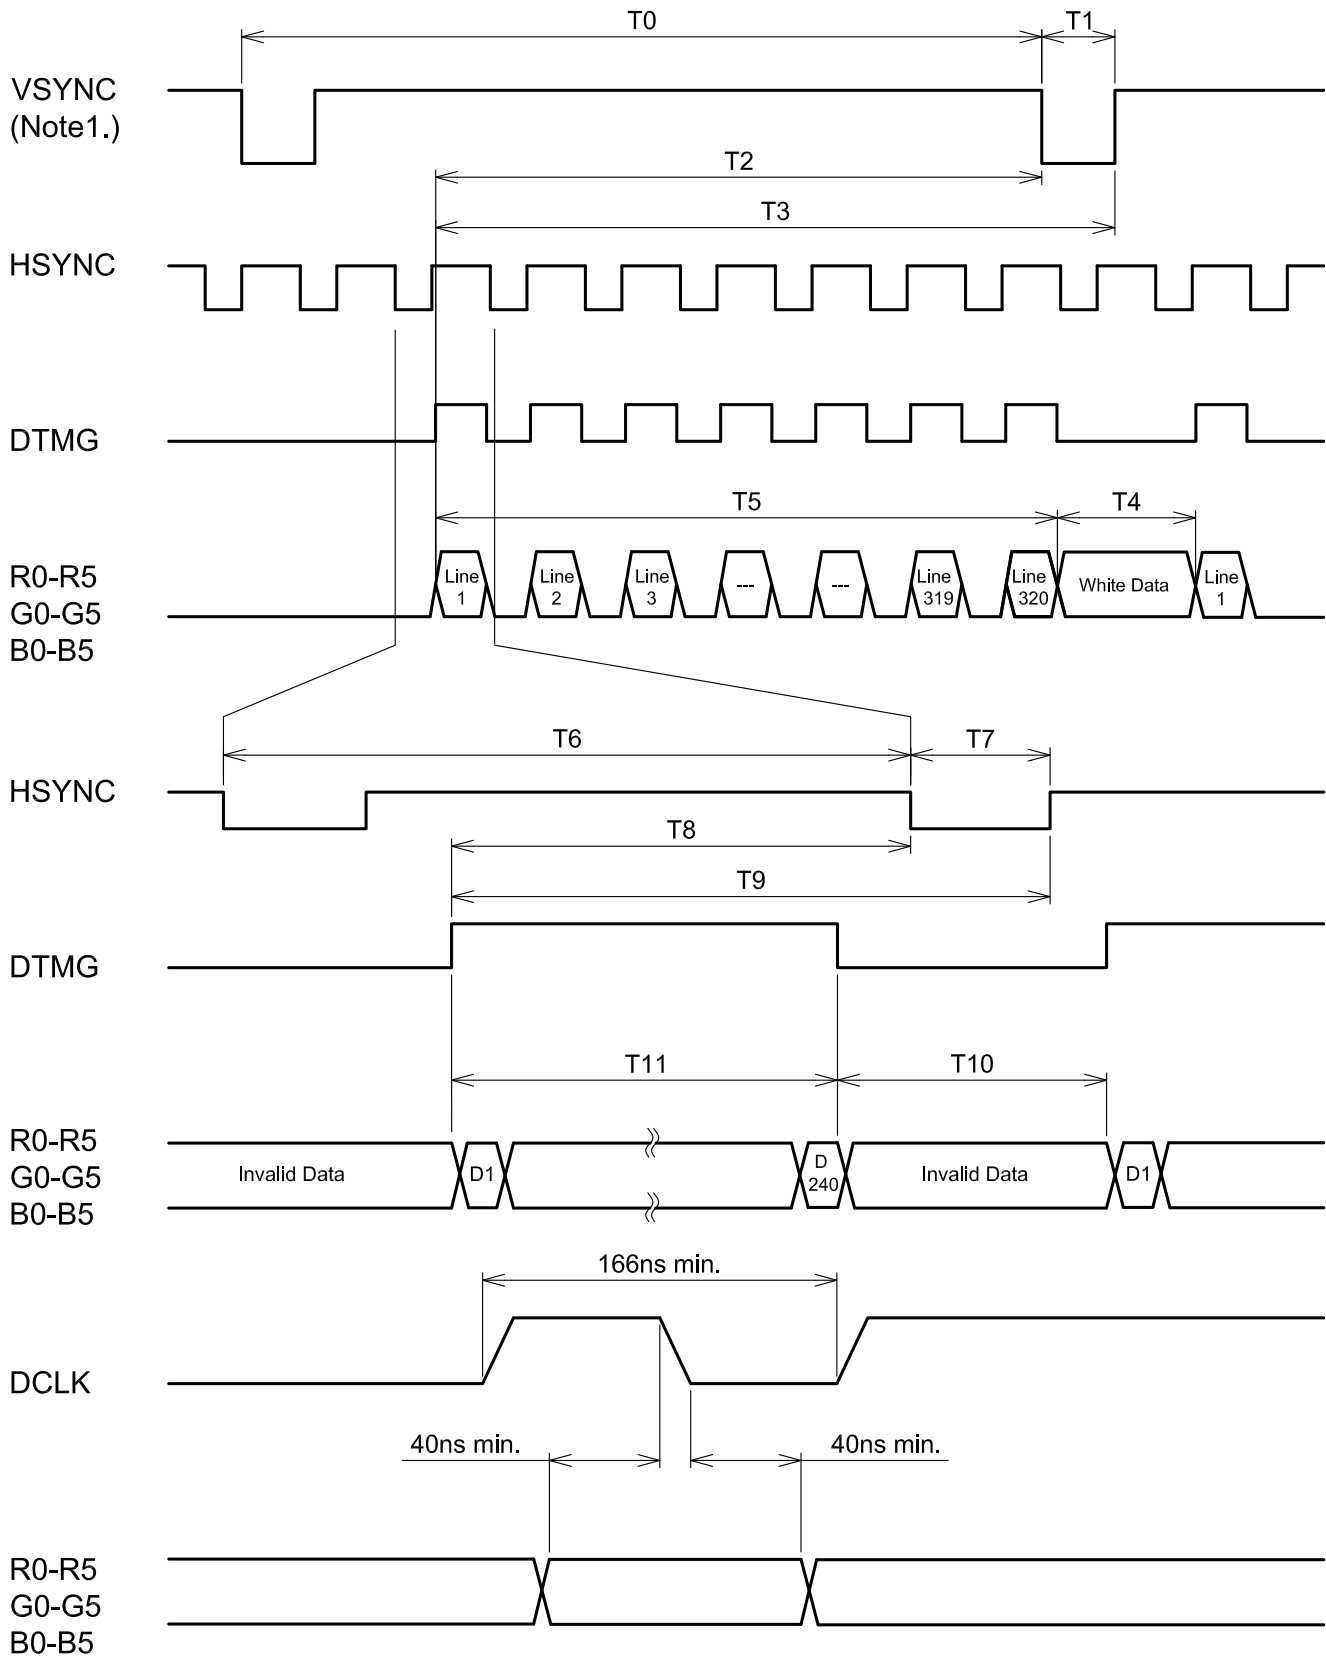



Fig1. Timing sequence for Graphic controller

Note1. VSYNC is generated by Tcon IC.

8.3 POWER ON/OFF SEQUENCE

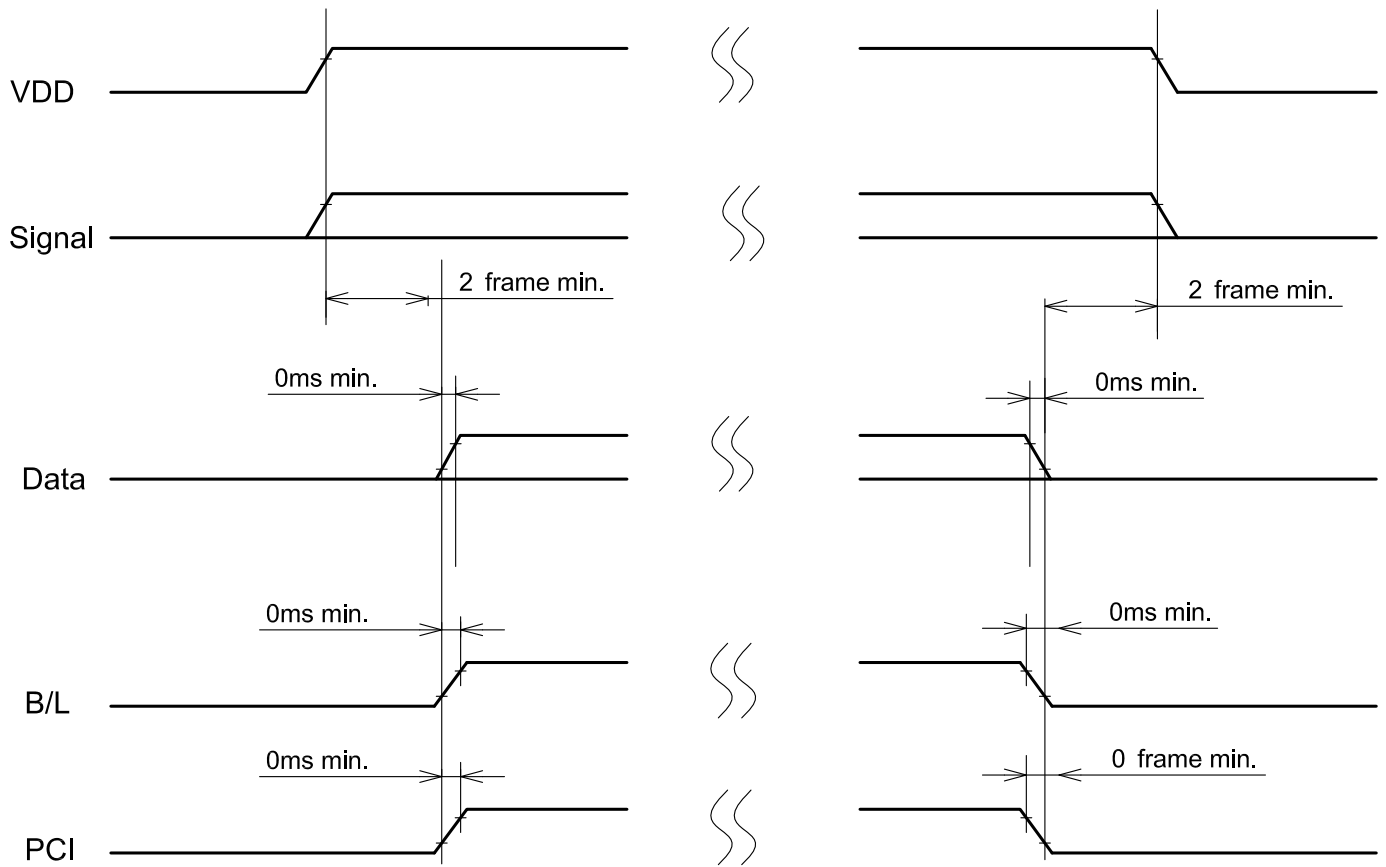

NOTE :



8.4 RELATIONSHIP BETWEEN DISPLAYED COLOR AND INPUT DATA

8.4.1 Display Colors

| Input color | | Red Data | | | | | | Green Data | | | | | | Blue Data | | | | | |
|----------------|-----------|----------|----|----|-----|----|----|------------|----|----|-----|----|----|-----------|----|----|-----|----|----|
| | | R5 | R4 | R3 | R2 | R1 | R0 | G5 | G4 | G3 | G2 | G1 | G0 | B5 | B4 | B3 | B2 | B1 | B0 |
| | | MSB | | | LSB | | | MSB | | | LSB | | | MSB | | | LSB | | |
| Basic Color | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(0) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(0) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue(0) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Red | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(62) | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(61) | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Red(2) | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(1) | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(0) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Green | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Green(2) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(1) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(0) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| Blue | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue(62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | Blue(61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Blue(2) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 |
| | Blue(1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| | Blue(0) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |




8.5 INTERNAL PIN CONNECTION

CN1 : FA5S040HP1R3000 (Suitable FPC : $t:0.3\pm0.03\text{mm}$, $0.5\pm0.03\text{mm}$ pitch)


| PIN No. | SIGNAL | FUNCTION |
|---------|--------|--------------------------|
| 1 | VDD | Power Supply for Logic |
| 2 | VDD | Power Supply for Logic |
| 3 | VDD | Power Supply for Logic |
| 4 | DCLK | Dot Clock |
| 5 | VSS | GND |
| 6 | HSYNC | Horizontal Sync Pulse |
| 7 | VSS | GND |
| 8 | DTMG | Timing Signal for Data |
| 9 | VSS | GND |
| 10 | NC | No Connection |
| 11 | VSS | GND |
| 12 | R5 | Red Data |
| 13 | R4 | |
| 14 | R3 | |
| 15 | VSS | GND |
| 16 | R2 | Red Data |
| 17 | R1 | |
| 18 | R0 | |
| 19 | VSS | GND |
| 20 | G5 | Green Data |
| 21 | G4 | |
| 22 | G3 | |
| 23 | VSS | GND |
| 24 | G2 | Green Data |
| 25 | G1 | |
| 26 | G0 | |
| 27 | VSS | GND |
| 28 | B5 | Blue Data |
| 29 | B4 | |
| 30 | B3 | |
| 31 | VSS | GND |
| 32 | B2 | Blue Data |
| 33 | B1 | |
| 34 | B0 | |
| 35 | PCI | Power Control In (Note1) |
| 36 | Vctrl | LED Current Control |
| 37 | XR | Touch Panel Right Side |
| 38 | YL | Touch Panel Lower Side |
| 39 | XL | Touch Panel Left Side |
| 40 | YU | Touch Panel Upper Side |

Note 1. Please follow the page 8-3/6 to set the PCI.


9.OUTLINE DIMENSIONS

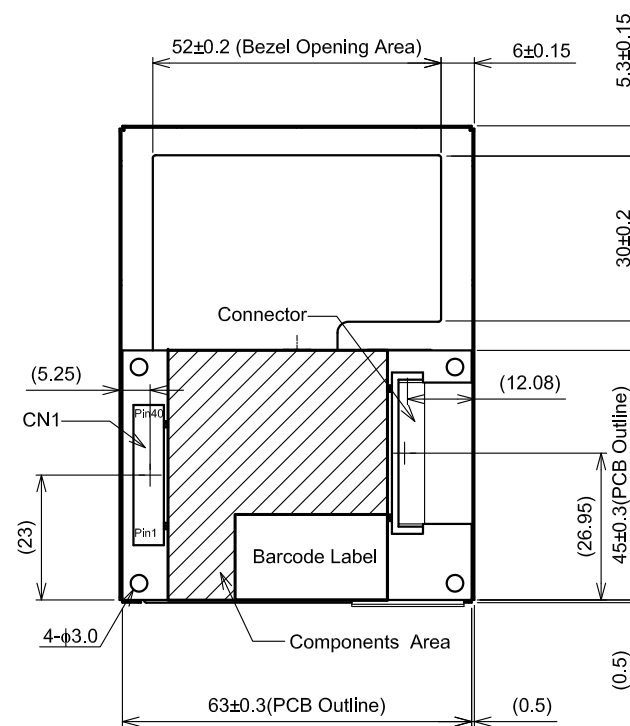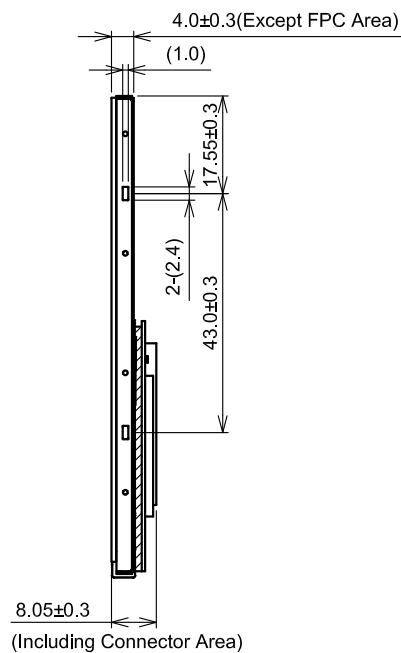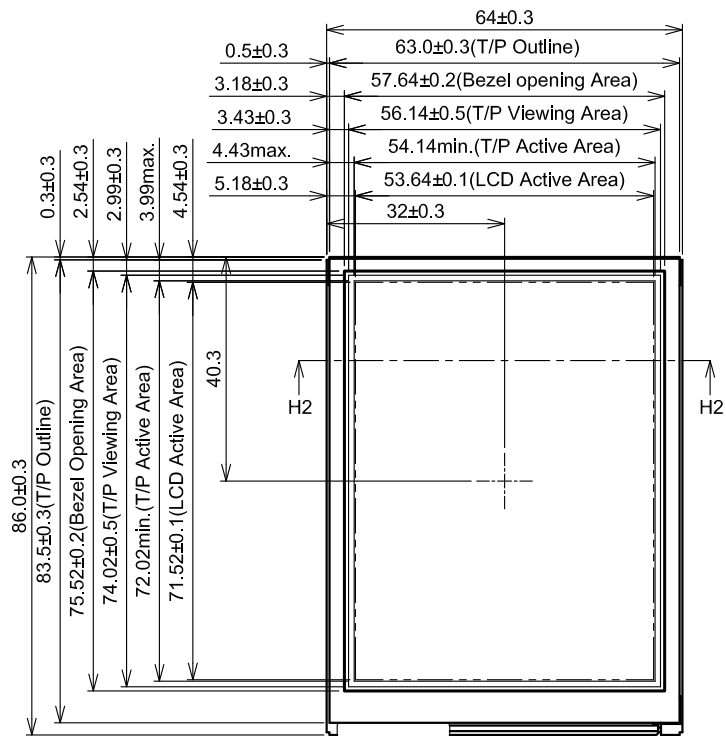


* : Without PCB Area

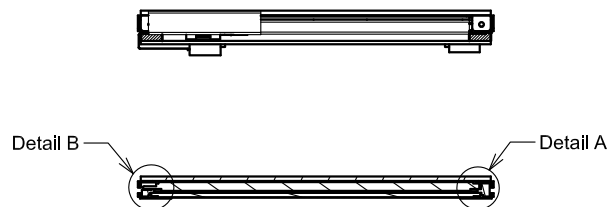

Section H2-H2



Detail B



Detail A

Scale : NTS
Unit : mm


10. APPEARANCE STANDARD

10.1 APPEARANCE INSPECTION CONDITION


Visual inspection should be done under the following condition.

- (1) The inspection should be done in a dark room.(More than 1000(lx) and non-directive)
- (2) The distance between eyes of an inspector and the LCD module is 30cm.
- (3) The viewing zone is shown the figure.

Viewing angle $\leq 25^\circ$

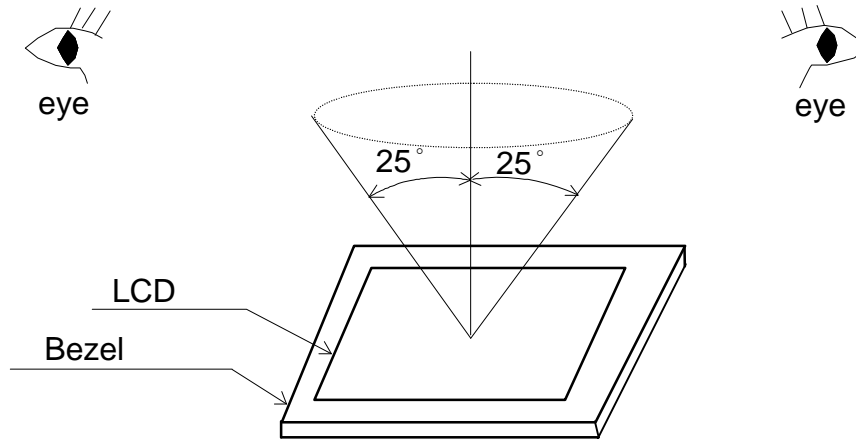

10.2 DEFINITION OF ZONE

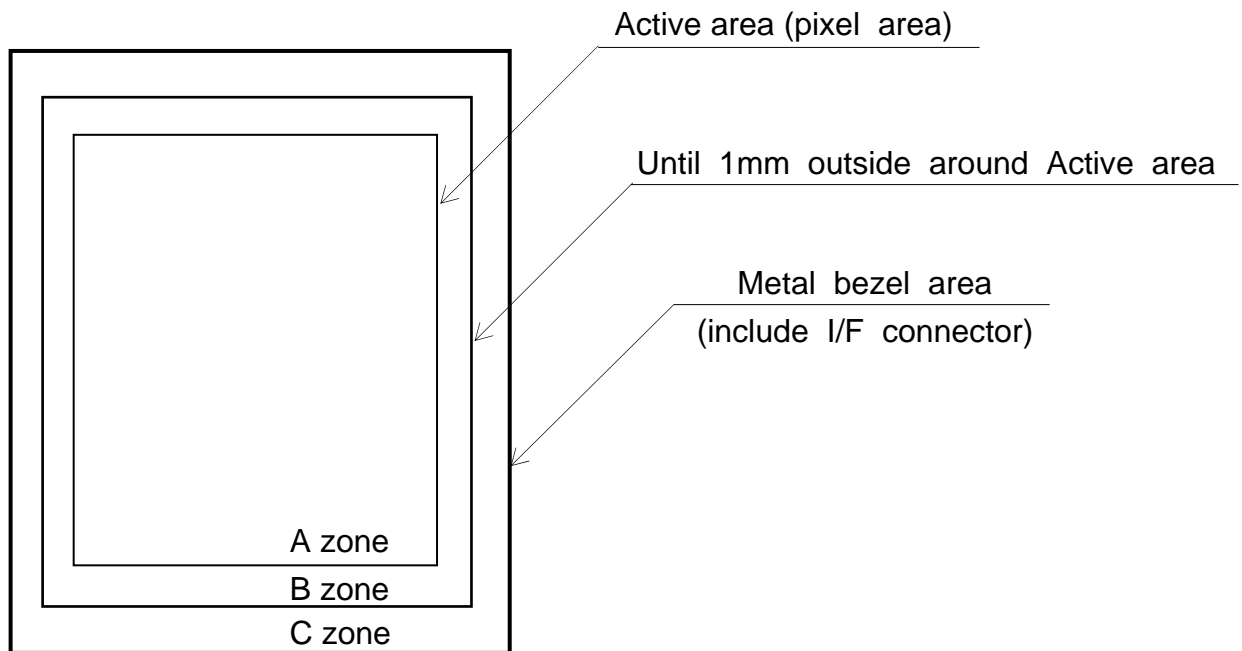

10.3 APPEARANCE SPECIFICATION

(1)LCD Appearance

*) If the problem related to this section occurs about this item, the responsible persons of both party (Customer and HITACHI) will discuss the matter in detail.

| No. | ITEM | CRITERIA | | | APPLIED ZONE |
|------------------------------|---------------------------------------|---|------------------------------|---------------------------------|--------------|
| L C D | Scratches | Length L(mm) | Width W(mm) | Maximum number acceptable | A,B |
| | | $L \leq 2.0$ | $W \leq 0.03$ | ignored | |
| | | $L \leq 2.0$ | $0.03 < W \leq 0.05$ | 4 | |
| | | $L > 2.0$ | $0.05 < W$ | none | |
| | Dent | Distinguished one is acceptable (To be judged by HITACHI standard) | | | A |
| | Wrinkles in Polarizer | Same as above | | | A |
| | Bubbles | Average diameter D(mm) | | Maximum number acceptable | A |
| | | $D \leq 0.3$ | | 2 | |
| | | $0.3 < D$ | | none | |
| | Stains Foreign Materials | Filamentous (Line shape) | | | A,B |
| | | Length L(mm) | Width W(mm) | Maximum number acceptable | |
| | | $L < 2.0$ | $W \leq 0.05$ | 4 | |
| | Dark spot | $L \leq 1.0$ | $0.05 < W \leq 0.1$ | 2 | A,B |
| | | Round(Dot shape) | | | |
| | Average diameter D(mm) | | Maximum number acceptable | | |
| | $D \leq 0.15$ | | 6 | | |
| | $0.15 < D \leq 0.2$ | | 4 | | |
| | $0.2 < D$ | | none | | |
| | The total number | | Filamentous + Round=9 | | |
| | Those wiped out easily are acceptable | | | | |
| | Color Tone | To be judged by HITACHI STANDARD | | | A |
| | Color Uniformity | Same as above | | | A |
| | Dot Defect | | | Maximum number acceptable | A , B |
| Sparkle mode | | 1 dot | 4 | | |
| | | 2 dots | 2(sets) | | |
| | | Total | 4 | | |
| Black mode | | 1 dot | 4 | | |
| | | 2 dots | 2(sets) | | |
| | | Total | 4 | | |
| Sparkle mode & Black mode | | 2 dots | 2(sets) | | |
| | | Total | 6 | | |

(2) Touch panel appearance

Visual inspection should be done under the following condition.




*) The inspection should be done in a dark room. (more than 500 lx) and non-directive)

*) The distance between eyes of an inspector and the LCD module is 30 cm.


*) The viewing angle $\leq 60^\circ$.

| No. | ITEM | CRITERIA | | | APPLIED ZONE |
|------------------------|----------------------------------|----------------------------------|------------------------|---------------------------|--------------|
| TOUCH PANEL | Scratches | Length L(mm) | Width W(mm) | Maximum number acceptable | A,B |
| | | - | $W < 0.05$ | ignored | |
| | | $10 < L$ | $0.05 \leq W < 0.1$ | none | |
| | | - | $0.1 \leq W$ | none | |
| | Foreign Materials Dark Spot | Filamentous (Line shape) | | | A,B |
| | | Length L(mm) | Width W(mm) | Maximum number acceptable | |
| | | - | $W < 0.05$ | Ignored | |
| | | $L > 3$ | $0.05 \leq W \leq 0.1$ | none | |
| | | - | $W \geq 0.1$ | Round | |
| | | Round(Dot shape) | | | A,B |
| | | Average diameter D(mm) | | Maximum number acceptable | |
| | | $D \leq 0.25$ | | ignored | |
| | | $0.25 < D \leq 0.35$ | | 6 | |
| | | $0.35 < D$ | | none | A,B |
| | Newton Ring (Touch Panel) | To be judged by HITACHI standard | | | A,B |
| Touch Panel Uncleaness | No conspicuous dirt | | | A | |
| Rubbing Scratch | To be judged by HITACHI standard | | | - | |


(3) Glass indentation
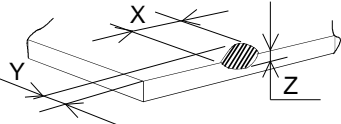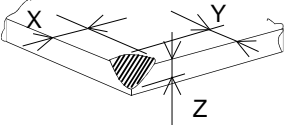
| ITEM | SPECIFICATIONS | | | | | | |
|--------------------|--|----------|---|---|------------|------------|----------|
| Common Indentation |  <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>≤ 5.0</td> <td>≤ 3.0</td> <td>$\leq t$</td> </tr> </table> | X | Y | Z | ≤ 5.0 | ≤ 3.0 | $\leq t$ |
| X | Y | Z | | | | | |
| ≤ 5.0 | ≤ 3.0 | $\leq t$ | | | | | |
| Corner Broken |  <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>≤ 3.0</td> <td>≤ 3.0</td> <td>$\leq t$</td> </tr> </table> | X | Y | Z | ≤ 3.0 | ≤ 3.0 | $\leq t$ |
| X | Y | Z | | | | | |
| ≤ 3.0 | ≤ 3.0 | $\leq t$ | | | | | |
| Proceeding Crack |  <p style="text-align: center;">None</p> | | | | | | |

Note 1 : Definition of average diameter (D)

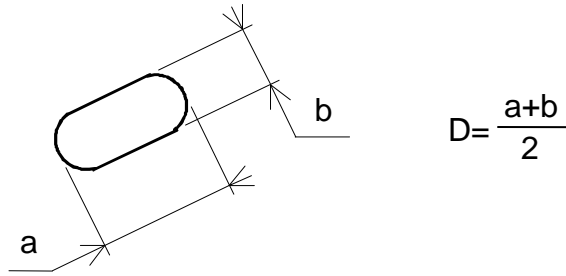

Note 2 : Definition of length (L) and width (W)

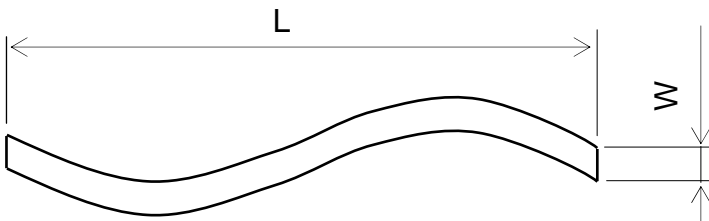

Note 3 : Definition of dot defect

- (a) Dot Defect : Defect Area $> 1/2$ dot
- (b) Sparkle mode : Brightness of dot is more than 30% at Black raster.
- (c) Black mode : Brightness of dot is less than 70% at R.G.B raster.
- (d) 1 dot : Defect dot is isolated , not attached to other defect dot.
- (e) N dot : N defect dots are consecutive .

(N means the number of defect dots.)

| R | G | B | R | G | B | R | G | B |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |
| | | | | X | | | | |
| | | | | | | | | |

2 dots defect included defect dot "X" is defined as follows.

Adjacent dots to defect dot "X" :




- (f) Counting definition of adjacent dots(1 sets) : same as 1 dot defect.
- (g) Those wiped out easily are acceptable

11. PRECAUTION IN DESIGN

11.1 MOUNTING PRECAUTION

(1) When assembling the Touch Panel and you case, please refer to the figure below.

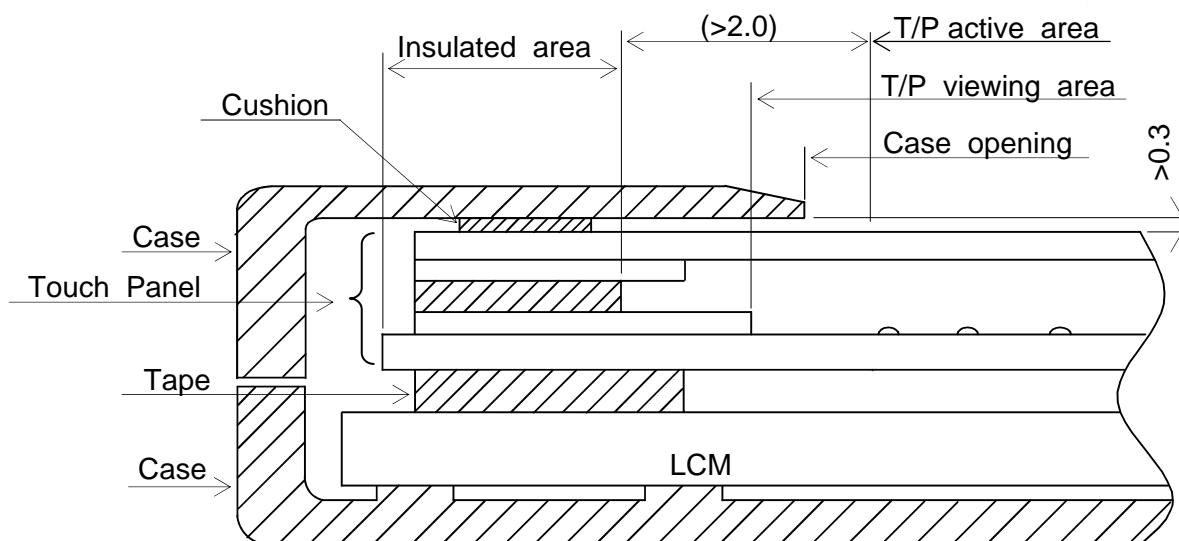

- (2) The clearance between the Touch Panel and case shall be designed so that the case edge never presses the input screen when it is deformed by heat or other causes.
- (3) The case shall be designed not to touch the tail portion (FPC for Touch Panel).
- (4) The boundary space between the effective area and the insulated area is unstable. Touching this area may effect the operation of the Touch Panel. The case must be designed so that it does not touch the boundary space.

11.2 PRECAUTIONS AGAINST ELECTROSTATIC DISCHARGE

As this module contains C-MOS LSIs, it is not strong against electrostatic discharge. Make certain that the operator's body is connected to the ground through a list band, etc. And don't touch I/F pins directly.

11.3 HANDLING PRECAUTIONS

- (1) Since the Touch Panel on the top, and the frame on the bottom tend to be easily damaged, they should be with full care so as not to get them touched, pushed or rubbed by a piece on glass, tweezers and anything else which are harder a pencil lead 3H.

- (2) As the adhesives used for adhering upper/lower polarizer's and frame are made of organic substances which will be deteriorated by a chemical reaction with such chemicals as acetone, toluene, ethanol and isopropyl alcohol. The following are recommended for use :
normal hexane

Please contact with us when it is necessary for you to use chemicals other than the above.

- (3) Lightly wipe to clean the dirty surface with absorbent cotton or other soft material like chamois, soaked in the recommended chemicals without scrubbing it hardly.
Always wipe the surface horizontally or vertically. Never give a wipe in a circle. To prevent the display surface from damage and keep the appearance in good state, it is sufficient, in general, to wipe it with absorbent cotton.
- (4) Immediately wipe off saliva or water drop attached on the display area because it may cause deformation or faded color.
- (5) Foggy dew deposited on the surface may cause a damage, stain or dirt to the polarizer.
When you need to take out the LCD module from some place at low temperature for test, etc.
It is required to be warmed them up to temperature higher than room temperature before taking them out.
- (6) Touching the display area or I/F pins with bare hands or contaminating them are prohibited, because the stain on the display area and poor insulation between terminals are often caused by being touched with bare hands.
(Some cosmetics are detrimental to polarizer's.)
- (7) In general, the glass is fragile so that, especially on its periphery, tends to be cracked or chipped in handling. Please not give the LCD module sharp shocks by falling , etc.
- (8) Maximum pressure to the surface must be less than 1.96×10^4 Pa.
And if the pressure area is less than 1cm^2 , maximum pressure must be less than 1.96N.
- (9) Since the metal width is narrow on these locations (see page 9-1/1), please careful with handling.
- (10) Top sheets shall be cleaned gently using a soft cloth such as those used for glasses.
Hard wiping accumulated dust will leave scars on the surface even using a cloth.

11.4 OPERATION PRECAUTION

- (1) Using a LCM module beyond its maximum ratings may result in its permanent destruction.
LCM module's should usually be used under recommended operating conditions shown in chapter 5. Exceeding any of these conditions may adversely affect its reliability.

| | | | | | | |
|---|------|------------|------------|-----------------------------|------|--------|
| KAOHSIUNG HITACHI ELECTRONICS CO.,LTD. | DATE | Jan.18,'11 | Sh. No. | 7B64PS 2711-TX09D70VM1CCA-7 | PAGE | 11-2/3 |
|---|------|------------|------------|-----------------------------|------|--------|

- (2) Response time will be extremely delayed at lower temperature than the specified operating temperature range and on the other hand LCD's shows dark blue at higher temperature.
However those phenomena do not main defects of the LCD module. Those phenomena will disappear in the specified operating temperature range.
- (3) If the display area is pushed hard during operation, some display patterns will be abnormally display.
- (4) A slight dew depositing on terminals may cause electrochemical reaction which leads to terminal open circuit. Please operate the LCD module under the relative condition of 40°C 85%RH.
- (5) Resistance range : Your controller shall be set up to allow the resistance range of Touch Panel specified in our CAS.
- (6) Pointed position of Touch Panel may shift owing to a change in resistance of Touch Panel depending on the operation condition . To compensate this shift, the set shall be given a calibration function.
- (7) Input shall be made with a stylus pen (polyacetal , R0.8). Chances are very high that use of a metal piece including a ball point pen or sharp edge will impair accuracy.
- (8) The Touch Panel is an auxiliary input device. The system shall be designed to have other input device.

11.5 STORAGE

In case of storing LCD module for a long period of time (for instance, for years) for the purpose of replacement use, the following precautions necessary.

- (1) Store the LCD modules in a dark place; do not expose them to sunlight or ultraviolet rays.
- (2) Keep the temperature between -20°C and 70°C at normal humidity.
- (3) Store the LCD modules in the container which is used for shipping from us.
- (4) No articles shall be left on the surface over an extended period of time.

11.6 SAFETY

Wear finger cots or gloves whenever handling or assembling a Touch Panel its glass edges are sharp.

12. DESIGNATION OF LOT MARK

12.1 LOT MARK

Lot mark is consisted of 4 digit for production lot 6 digits for production control..



| Year | Mark |
|------|------|
| 2011 | 1 |
| 2012 | 1 |
| 2013 | 3 |
| 2014 | 4 |
| 2015 | 5 |

| Month | Jan. | Feb. | Mar. | Apr. | May | Jun. |
|-------|------|------|------|------|------|------|
| Mark | 01 | 02 | 03 | 04 | 05 | 06 |
| Month | Jul. | Aug. | Sep. | Oct. | Nov. | Dec. |
| Mark | 07 | 08 | 09 | 10 | 11 | 12 |

| Week (Day In Calendar) | Figure In Lot Mark |
|------------------------|--------------------|
| 01~07 | 1 |
| 08~14 | 2 |
| 15~21 | 3 |
| 22~28 | 4 |
| 29~31 | 5 |

12.2 SERIAL No.



Serial No. is consisted of 6 digits number (000001~999999).

12.3 REVISION (REV.) CONTROL

Rev. is the column for manufacturing convenience A-Z except I and O maybe written on this column.

| REV. | Item | NOTE |
|------|---|---------|
| A | - | - |
| B | 1.Changed DC/DC converter circuit design. 2.Barcode label. | PCN0683 |
| C | Connectors Changed | PCN0804 |

12.4 LOCATION OF LABEL : On the PCB

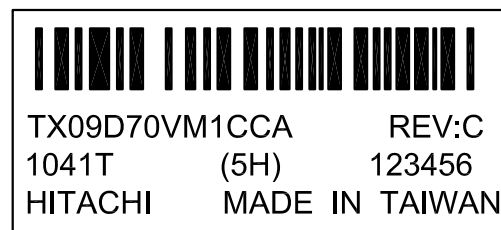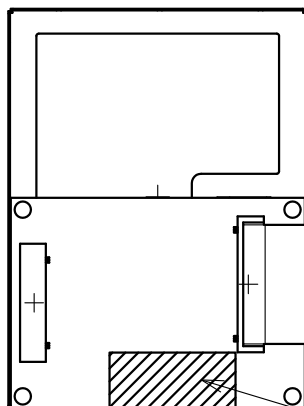

Label

13. PRECAUTION FOR USE

(1) A limit sample should be provided by the both parties on an occasion when the both parties agree to its necessity.

Judgement by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

(2) On the following occasions, the handling of the problem should be decided through discussion and agreement between responsible persons of the both parties.

1) When a question is arisen in the specifications.

2) When a new problem is arisen which is not specified in this specifications.

3) When an inspection specifications change or operating condition change by customer is reported to HITACHI, and some problem is arisen in the specification due to the change.

4) When a new problem is arisen at the customer's operating set for sample evaluation.

(3) Regarding the treatment for maintenance and repairing, both parties will discuss it in six months later after latest delivery of this product.

The precaution that should be observed when handling LCM have been explained above.

If any points are unclear or if you have any requests , please contact with HITACHI.