


THROUGH BOARD MOUNT




- Note: End stackable.
- Series 540 PLCC sockets are designed to accept JEDEC type MS-016 & MS-018 leaded plastic substrates.
- Body has polarizing features for both substrate and socket insertion.
- Contacts of highly reliable design safely hold the substrate in place by positive spring action.
- PLCC chip extraction tool available. See page 96.

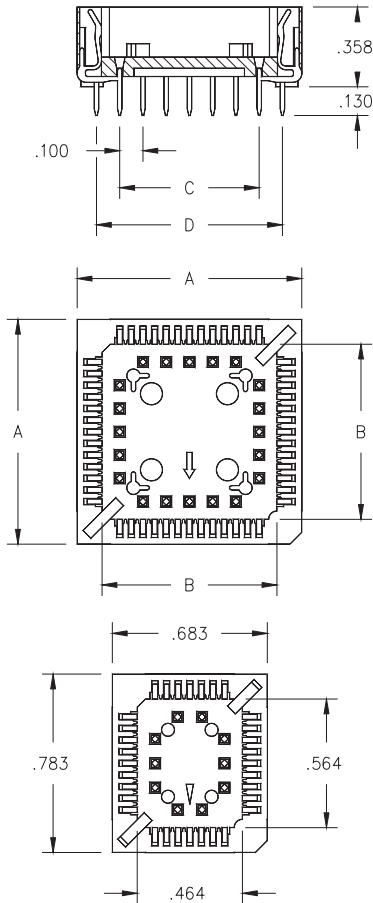

PRINTED CIRCUIT DRILLING PATTERNS
(TOP VIEW)

.030" dia. min. mounting holes

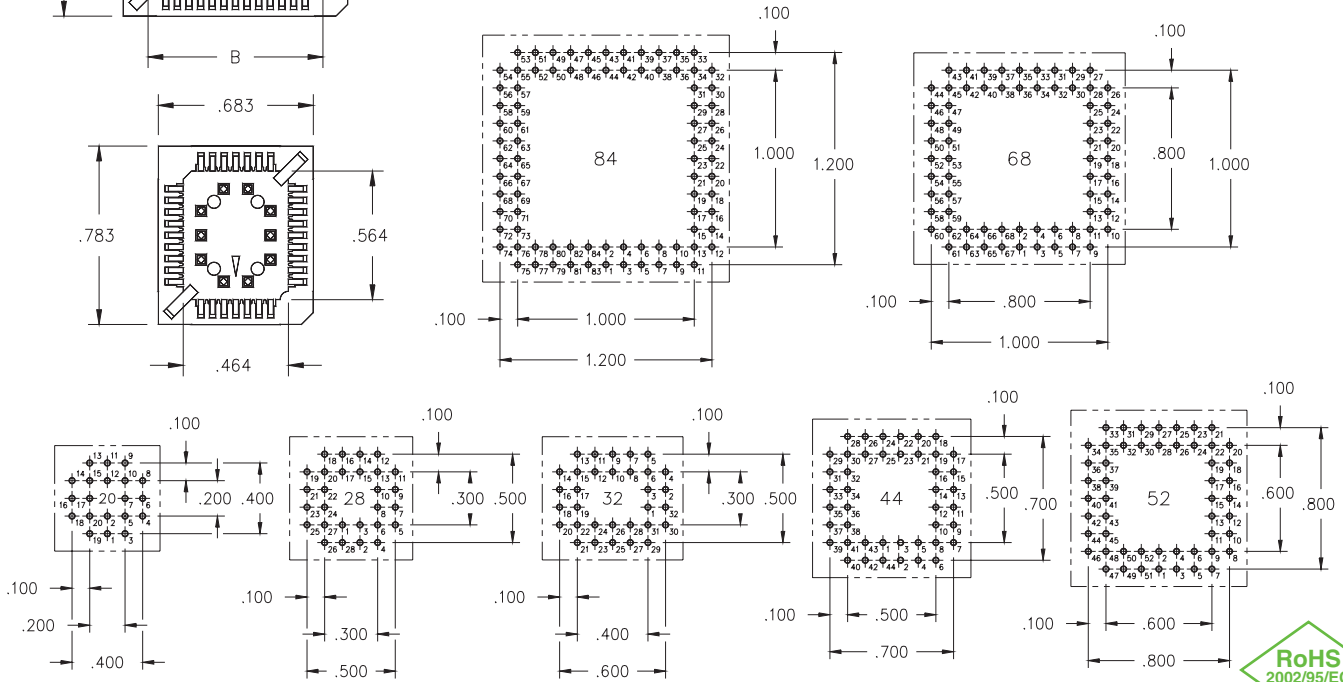

No. of Pins	ORDERING INFORMATION	- A -	- B -	- C -	- D -	Quantity per Tube
20	540-99-020-24-000000	.590	.360	.200	.400	34
28	540-XX-028-24-000000	.690	.460	.300	.500	29
32*	540-XX-032-24-000000	.783 / .683	.564 / .464	.400 / .300	.600 / .500	25
44	540-XX-044-24-000000	.890	.660	.500	.700	22
52	540-XX-052-24-000000	.990	.760	.600	.800	20
68	540-XX-068-24-000000	1.190	.960	.800	1.000	16
84	540-XX-084-24-000000	1.390	1.160	1.000	1.200	14

↑
Plating Code *RECTANGULAR
XX = 99 150µ" Sn/Pb
XX = 44 150µ" Sn ◇